Plan

CDN/ID S4100AH717908



Operational and Scientific Monitoring Plan

Offshore Victoria

Review record (record the last 3 revisions here or the revisions required to achieve current approval version)

Revision	Date	Reason for issue	Reviewer/s	Consolidator	Approver
2	19/12/2019	Issued for NOPSEMA assessment	PW	Xodus	PW
3	31/01/2020	Issued for NOPSEMA assessment	PW	Xodus	PW
4	26/02/2020	Issued for NOPSEMA assessment	PW	Xodus	PW

Review due	Review frequency
Annually from date of acceptance	1 year/s

For internal use and distribution only. Subject to employee confidentiality obligations. Once printed, this is an uncontrolled document unless issued and stamped Controlled Copy or issued under a transmittal.

THE THREE WHATS

What can go wrong?What could cause it to go wrong?What can I do to prevent it?

Ta	ole o	of contents	
1	Intr	roduction	3
	1.1	Purpose	3
	1.2	Scope	3
		1.2.1Activities	3
		1.2.2Oil type	3
		1.2.3 Geographic extent	4
	1.3	Definitions/Acronyms	4
2	OSI	MP Framework	6
	2.1	Overview	6
	2.2	Objectives	6
	2.3	Types of monitoring	6
	2.4	Study design and standard operating procedures	7
	2.5	Baseline environmental state	8
	2.6	Links to response options	9
	2.7	Links to environmental values and sensitivities	9
3	lmp	plementation	14
	3.1	Overview	14
	3.2	Roles and responsibilities	14
	3.3	Capability, training and competency	15
		3.3.1Capability	16
		3.3.2Training and Competency	16
	3.4	Monitoring	16
	3.5	Communication and notification	19
	3.6	Review and revisions	19
	3.7	Environmental Performance Outcomes	19
4	Оре	erational Monitoring	21
	4.1	Overview	21
		4.1.1General design considerations	21
	4.2	Study O1: Oil characterisation and behaviour	22
	4.3	Study O2: Water quality	23
	4.4	Study O3: Sediment quality	25
	4.5	Study O4: Marine fauna surveillance	27
	4.6	Study O5: Dispersant efficacy	28
	4.7	Study O6: Fish tainting	30
5	Scie	entific Monitoring	32
	5.1	Overview	32
		5.1.1General design considerations	32
	5.2	Study S1: Water quality impact assessment	33
	5.3	Study S2: Sediment quality impact assessment	35
	5.4	Study S3: Subtidal habitats impact assessment	38
	5.5	Study S4: Intertidal and coastal habitats impact assessment	41
	5.6	Study S5: Marine fauna impact assessment	43

Operational and Scientific Monitoring Plan

CDN/ID S4100AH717908

	5.7 Study S6: Fisheries impact assessment	46
	5.8 Study S7: Heritage and socioeconomic impact assessment	48
6	References/Associated documents	51
7	Document information and history	53
Та	able of figures	
Fig	gure 3-1: Implementation process for operational and scientific monitoring	18
Lis	st of tables	
Та	able 2-1: Study scopes appropriate for post-spill pre-impact sampling (reactive baseline)	8
Ta	able 2-2: Operational monitoring and response strategies	9
Ta	able 2-3: Environmental values and sensitivities and related operational and scientific monitoring studies	10
Ta	ble 3-1: Roles and responsibilities for OSMP implementation	14
Та	able 3-2: Environmental Performance Outcomes, Standards and Measurement Criteria	20
Lis	st of appendices	
Αŗ	opendix A Approaches for Scientific Monitoring Design	54
	A. 1. Before-After-Control-Impact (BACI) approach	54
	A. 2. Impact versus Control (IvC) approach	56
	A. 3. Gradient approach	56
	A. 4. Control chart approach	57
	A. 5. Lines of evidence approach	58
Αŗ	ppendix B Baseline Information	61

1 Introduction

1.1 Purpose

This Offshore Victoria Operational and Scientific Monitoring Plan (OSMP) provides the framework for environmental monitoring response to Level 2 and Level 3 offshore oil spills from petroleum activities undertaken by Beach Energy Ltd (Beach) in the Otway and Bass Basins.

The OSMP is a component of the environmental management framework, which also includes activity specific Environment Plans (EP), the Offshore Victoria – Otway Basin Oil Pollution Emergency Plan (OPEP) (CDN/ID S4100AH717907) and the BassGas Offshore OPEP (CDN/ID 3972816).

The OSMP has been developed to satisfy the requirements of Regulation 14(8AA) and 14(8D) of the Commonwealth Offshore Petroleum and Greenhouse Gas Storage (Environment) Regulations 2009 (OPGGS(E)R), Regulation 16 of the Victorian Offshore Petroleum and Greenhouse Gas Storage Regulations 2011 (OPGGSR) and Regulation 19 of the Tasmanian Petroleum (Submerged Lands) (Management of Environment) Regulations 2012 (P(SL)(ME)R).

The OSMP is to be read in conjunction with the relevant EP, OPEP and OSMP Addendum when considering the existing environment, values and sensitivities, credible oil spill risks and potential impacts, response activities and the decision processes that will apply in the event that a spill occurs. The relevant EP also describes any related performance standards, notification requirements and/or reporting compliance.

1.2 Scope

1.2.1 Activities

This OSMP is relevant to all Beach petroleum activities within the Otway and Bass Basins regulated under the Commonwealth OPGGS(E)R, Victorian OPGGSR and Tasmanian P(SL)(ME)R. This includes, but is not limited to the following activity types:

- · Operation of a facility or pipeline
- Vessel activities
- Drilling.

1.2.2 Oil type

Spill risks from the above activities that could result in a Level 2 or Level 3 spill event include two oil types:

- Gas condensate
- · Marine diesel.

This OSMP is relevant to all oil types and states (i.e. fresh and weathered); and all distributions throughout the environment (e.g. surface, entrained, dissolved and shoreline).

Based on template: AUS 1000 IMT TMP 14376462_Revision 3_Issued for Use _06/03/2019_LE-SystemsInfo-Information Mqt.

1.2.3 Geographic extent

This OSMP is relevant and applicable to all Commonwealth and State marine and coastal areas that are potentially at risk of exposure to oils in the event of a Level 2 or Level 3 spill resulting from Beach's petroleum activities within the Otway and Bass Basins.

The spatial extent of any particular operational or scientific monitoring study will depend on the actual and/or potential area exposed by an individual spill event. Therefore, monitoring extent would only be finalised once a spill event has occurred and be at a sufficient scale to meet monitoring objectives.

1.3 Definitions/Acronyms

Definitions of terms used in this plan:

Terms/acronym	Definition/expansion
AMSA	Australian Maritime Safety Authority
ANOVA	Analysis of variance
ANZECC	Australian and New Zealand Environment and Conservation Council
ANZG	Australian and New Zealand Governments
API	American Petroleum Institute
ARMCANZ	Agriculture and Resource Management Council of Australia and New Zealand
BACI	Before After Control Impact
Beach	Beach Energy Ltd
Control Agency	The Control Agency for an oil spill response is the government agency or company assigned by legislation, administrative arrangement or within the relevant contingency plan to control response activities to an oil spill
DJPR	(Victoria) Department of Jobs, Precincts and Regions
DPIPWE	(Tasmania) Department of Primary Industries, Parks, Water and Environment
EP	Environment Plan
EPBC Act	(Commonwealth) Environment Protection and Biodiversity Conservation Act 1999
EMBA	Environment that may be Affected
EMLO	Emergency Management Liaison Officer
EMT	Emergency Management Team
EUL	Environment Unit Lead
HSE	Heath, Safety and Environment
Incident Controller	The individual responsible for the management of all incident control activities across an incident (Note: for spill events where Beach is the Control Agency, this is the equivalent of the EMT Leader)
IMT	Incident Management Team
IvC	Impact versus Control
LCL	Lower control limit
LEL	Lower explosive limit
	to the protection of the second secon

Terms/acronym	Definition/expansion
Level 2	Level 2 incidents are more complex in size, duration, resource management and risk and may require deployment of jurisdiction resources beyond the initial response (as per NatPlan)
Level 3	Level 3 incidents are generally characterised by a degree of complexity that requires the Incident Controlle to delegate all incident management functions to focus on strategic leadership and response coordination and may be supported by national and international resources (as per NatPlan)
MBACI	Multiple Before After Control Impact
MNES	Matters of national environmental significance
Monitoring Provider	Service provider for environmental monitoring studies; may be one or multiple companies (as required)
NATA	National Association of Testing Authorities
NatPlan	National Plan for Maritime Environmental Emergencies
NOAA	(United States) National Oceanic and Atmospheric Administration
NOPSEMA	National Offshore Petroleum Safety and Environmental Management Authority
OPGGS(E)R	(Commonwealth) Offshore Petroleum and Greenhouse Gas Storage (Environment) Regulations 2009
OPGGSR	(Victoria) Offshore Petroleum and Greenhouse Gas Storage Regulations 2011
OSMP	Operational and Scientific Monitoring Plan
OSRL	Oil Spill Response Limited
OPEP	Oil Pollution Emergency Plan
PAH	Polycyclic aromatic hydrocarbons
PERMANOVA	Permutational multivariate analysis of variance
PSD	Particle size distribution
P(SL)(ME)R	(Tasmania) Petroleum (Submerged Lands) (Management of Environment) Regulations 2012
Ramsar	Convention on wetlands of international importance
SAP	Sampling and Analysis Plan
SD	Standard deviation
SMART	Special Monitoring of Applied Response Technologies
SME	Subject Matter Expert
SOP	Standard operating procedures
SQGV	Sediment quality guideline value
Statutory Authority	The Statutory Authority has the statutory responsibility for marine pollution incidents in their area of jurisdiction
TOC	Total organic carbon
TPH	Total petroleum hydrocarbon
UCL	Upper control limit
USEPA	United States Environment Protection Authority
VOC	Volatile organic compound

2 OSMP Framework

2.1 Overview

This OSMP provides the framework for Beach's environmental monitoring response to Level 2 and Level 3 offshore oil spills from their petroleum activities undertaken in the Otway and Bass Basins.

This OSMP lists a series of possible studies (with types of sampling techniques and parameters) that may be undertaken in the event of a spill. This OSMP is not intended to be prescriptive, but to provide a flexible framework such that the finalised monitoring studies are fit for purpose and tailored to the specific location, oil type, environmental sensitivities, and the nature and scale of the individual spill.

This OSMP incorporates regulatory guidance from the following documents:

- Guidance note Oil pollution risk management (NOPSEMA 2018)
- Information paper Operational and scientific monitoring programs (NOPSEMA 2016).

2.2 Objectives

The objectives of this OSMP are:

- Identify and describe the operational and scientific monitoring that may be implemented in the event of a Level 2 or Level 3 oil spill to the marine or coastal environment
- Demonstrate an appropriate degree of readiness to implement this monitoring in the event of an oil spill to the marine or coastal environment.

2.3 Types of monitoring

Oil spill monitoring has been divided into two types, operational and scientific, which are undertaken for two distinct, but closely related, purposes (NOPSEMA 2016).

Operational monitoring (also known as Type I or response phase monitoring) which collects information about the spill and associated response activities to aid planning and decision making during the response or clean-up operations. Operational monitoring may include both initial response phase monitoring (i.e. rapid qualitative and observational data gathering for situational awareness) and advanced response phase monitoring (i.e. quantitative measurement) (Hook et al. 2016). Operational monitoring typically finishes when the spill response is terminated.

Six operational monitoring studies have been identified (see Section 4):

- O1: Oil characterisation and behaviour
- O2: Water quality
- O3: Sediment quality
- O4: Marine fauna surveillance
- O5: Dispersant efficacy

· O6: Fish tainting.

Operational monitoring studies complement the Monitoring and Evaluate response strategy described in the relevant OPEP. This response strategy may include spatial surveillance techniques and spill trajectory predictions. Operational monitoring (e.g. Study O5) can also be directly related to a particular response strategy (i.e. Chemical Dispersants) (see Section 2.4).

Scientific monitoring (also known as Type II or recovery phase monitoring) which is focussed on non-response objectives and evaluating environmental impact and recovery from both the spill event itself as well as from any response activities. Results from scientific monitoring studies may also be used to identify and recommend remediation requirements where required. Scientific monitoring may continue for extended periods after a spill response is terminated

Seven scientific monitoring studies have been identified (see Section 5):

- S1: Water quality impact assessment
- S2: Sediment quality impact assessment
- S3: Subtidal habitats impact assessment
- S4: Intertidal and coastal habitats impact assessment
- S5: Marine fauna impact assessment
- S6: Fisheries impact assessment
- S7: Heritage and socioeconomic impact assessment.

Operational and scientific monitoring studies may occur simultaneously (i.e. scientific monitoring can start before a response operation is completed). There may also be an information flow between studies, for example data from operational monitoring may be used to trigger the initiation of scientific studies.

Different oil types, spill locations, and volumes require different studies to form a fit–for–purpose operational and scientific monitoring program that is able to determine the extent, severity and persistence of environmental impacts from the oil spill.

2.4 Study design and standard operating procedures

Where appropriate, sampling design and procedures will be aligned with existing standards or guidance notes. These include, but are not limited to:

- Oil Spill Monitoring Handbook (Hook et al. 2016)
- · Australian and New Zealand Water Quality Guidelines for Fresh and Marine Waters Quality (ANZG 2018)
- Parks Victoria Standard Operating Procedure for Biological Monitoring of Subtidal Reefs (Edmunds and Hart 2005)
- Parks Victoria Standard Operating Procedure for Biological Monitoring of Intertidal Reefs (Hart and Edmunds 2005)
- Industry Recommended Subsea Dispersant Monitoring Plan (American Petroleum Institute 2013)

- Dispersant Application Monitoring Field Guide Tier I Visual Observation (OSRL 2011)
- Special Monitoring of Applied Response Technologies (NOAA 2006).

References to relevant standard operating procedures are provided within study tables in Section 4 and 5.

Consideration has also been given to the scopes and procedures within the Industry OSMP that is currently under preparation by APPEA (APPEA 2019).

2.5 Baseline environmental state

Baseline monitoring provides information on the condition of ecological receptors prior to or spatially independent (e.g. if used in control chart analyses) of a spill event. This is of importance for scientific monitoring where the ability to detect changes between pre-impact and post-impact conditions is necessary.

Given the large aerial extents of predicted oil exposure (or EMBA) from worst-case spill scenarios, and the inherent spatial and temporal variability in the environment, an ongoing or pre-impact baseline monitoring program is not planned.

However, Appendix B provides a database of known literature and studies relevant to environmental receptors within the Otway and Bass Basins that may provide suitable baseline data and/or contextual information in the event of a spill.

In addition, there are also operational and scientific monitoring studies that are suited to pre-impact baseline monitoring (Table 2-1). Therefore, in the event of a Level 2 or Level 3 oil spill, reactive pre-impact monitoring should, where practicable, be implemented to gather additional data on the current state of the environment.

Table 2-1: Study scopes appropriate for post-spill pre-impact sampling (reactive baseline)

Study	Pre-impact sampling	Post-impact sampling
Operational monitoring		
O1: Oil characterisation and behaviour		✓
O2: Water quality	✓	✓
O3: Sediment quality	✓	✓
O4: Marine fauna surveillance		✓
O5: Dispersant efficacy		✓
O6: Fish tainting		✓
Scientific monitoring		
S1: Water quality impact assessment	✓	✓
S2: Sediment quality impact assessment	✓	✓
S3: Subtidal habitats impact assessment	✓	✓
S4: Intertidal and coastal habitats impact assessment	✓	✓
S5: Marine fauna impact assessment	✓	✓
S6: Fisheries impact assessment		✓
S7: Heritage and socioeconomic impact assessment	✓	✓

2.6 Links to response options

The objectives of individual operational monitoring studies are typically associated with one or more specific response strategies (Table 2-2).

Table 2-2: Operational monitoring and response strategies

Response strategy	Study O1 Oil characterisation and behaviour	Study O2 Water quality	Study O3 Sediment quality	Study O4 Marine fauna surveillance	Study O5 Dispersant efficacy	Study O6 Fish tainting
Source control	✓	✓	✓			
Monitor and evaluate	✓	✓	✓	✓		✓
Assisted natural dispersion	✓	✓		✓		✓
Chemical dispersants	✓	✓	✓		✓	✓
Containment and recovery	✓			✓		
Protection and deflection	✓	✓	✓	✓		
Shoreline clean- up	✓		✓	✓		
Oiled wildlife response	✓			✓		

2.7 Links to environmental values and sensitivities

The types of environmental values and sensitivities (including matters of national environmental significance) known to occur in the Otway and Bass Basins and the related operational and scientific monitoring studies area shown in Table 2-3.

For the identification and descriptions of values and sensitivities present within an environment that may be affected (EMBA) for a particular activity, refer to the description in the relevant EP.

For an identification of key areas at risk, the associated environmental values and sensitivities and the links to relevant operational and scientific monitoring studies, refer to the relevant OSMP Addendum.

Based on template: AUS 1000 IMT TMP 14376462_Revision 3_Issued for Use _06/03/2019_LE-SystemsInfo-Information Mqt.

Table 2-3: Environmental values and sensitivities and related operational and scientific monitoring studies

Environmental value and sensitivities	Matters of national	Value or s present i			Ol	perational	Monitori	ng				Scien	tific Moni	toring		
	environmental significance	Otway Basin	Bass Basin	Study O1	Study O2	Study O3	Study O4	Study O5	Study O6	Study S1	Study S2	Study S3	Study S4	Study S5	Study S6	Study S7
				Oil characterisation and behaviour	Water quality	Sediment quality	Marine fauna surveillance	Dispersant efficacy	Fish tainting	Water quality impact assessment	Sediment quality impact assessment	Subtidal habitats impact assessment	Intertidal and coastal habitats impact assessment	Marine fauna impact assessment	Fisheries impact assessment	Heritage and socioeconomic impact assessment
Protected areas																
Australian Marine Parks	√ ¹	✓	✓		✓	✓	✓			✓		✓		✓		✓
State marine protected areas		✓	✓		✓	✓	✓			✓	✓	✓	✓	✓		✓
State terrestrial protected areas		✓	✓			✓	✓				✓			✓		✓
Wetlands of international importance (Ramsar wetlands)	✓	✓	√		✓	✓	✓				✓		✓	✓		✓
Ecological features																
Key ecological features	2	✓	×		✓					✓		✓				
Threatened ecological communities	✓	✓	✓		✓							✓	✓			

Environmental value and sensitivities	Matters of national	Value or s present i	-		Ol	perational	Monitori	ng				Scien	tific Moni	toring		
	environmental significance	Otway Basin	Bass Basin	Study O1	Study O2	Study O3	Study O4	Oispersant efficacy 60 ns	Fish tainting	Study S1	Study S2	Subtidal habitats impact S propert S assessment	Study S4	Study S5	Fisheries impact assessment 65 Ppr 6 Ppr 6 Ppr 7	Study S7
				Oil characterisation and behaviour	Water quality	Sediment quality	Marine fauna surveillance			Water quality impact assessment	Sediment quality impact assessment		Intertidal and coastal habitats impact assessment	Marine fauna impact assessment		Heritage and socioeconomic impact assessment
Threatened and migratory species	✓	✓	✓				✓							✓		
Invertebrates		✓	✓											✓	✓	
Fish		✓	✓											✓	✓	
Sharks		✓	✓				✓							✓		
Cetaceans		✓	✓				✓							✓		
Pinnipeds		✓	✓				✓							✓		
Turtles		✓	✓				✓							✓		
Birds		✓	✓				✓							✓		
Subtidal benthic habitats		✓	✓									✓				
Intertidal benthic habitats		✓	✓										✓			
Wetlands of national importance		✓	✓		✓	✓	✓						✓	✓		

Environmental value and sensitivities	Matters of national	Value or s present i			O	perational	l Monitori	ng				Scien	tific Moni	toring		
	environmental significance	Otway Basin	Bass Basin	Study O1	Study O2	Study O3	Study O4	Study O5	Study O6	Study S1	Study S2	Study S3	Study S4	Study S5	Study S6	Study S7
				Oil characterisation and behaviour	Water quality	Sediment quality	Marine fauna surveillance	Dispersant efficacy	Fish tainting	Water quality impact assessment	Sediment quality impact assessment	Subtidal habitats impact assessment	Intertidal and coastal habitats impact assessment	Marine fauna impact assessment	Fisheries impact assessment	Heritage and socioeconomic impact assessment
Cultural and heritage features																
World Heritage properties	✓	×	×													✓
Commonwealth Heritage places		×	✓		✓	✓	✓				✓		✓			✓
National Heritage places	✓	✓	✓		✓	✓	✓				✓		✓			✓
Indigenous Protected Areas		✓	✓			✓					✓		✓			✓
Areas of Aboriginal cultural heritage sensitivity		✓	✓			✓					✓		✓			✓
Shipwrecks		✓	✓		✓					✓		✓				✓
Socioeconomic features																
Commercial fisheries		✓	✓						✓						✓	

Environmental value and sensitivities	Matters of national		Value or sensitivity present in region		O	perationa	l Monitori	ng			Scientific Monitoring							
	environmental significance	Otway Basin	Bass Basin	Study O1	Study O2	Study O3	Study O4	Study O5	Study O6	Study S1	Study S2	Study S3	Study S4	Study S5	Study S6	Study S7		
			Oil characterisation and behaviour Water quality	Sediment quality	Marine fauna surveillance	Dispersant efficacy	Fish tainting	Water quality impact assessment	Sediment quality impact assessment	Subtidal habitats impact assessment	Intertidal and coastal habitats impact assessment	Marine fauna impact assessment	Fisheries impact assessment	Heritage and socioeconomic impact assessment				
Tourism and recreation		✓	✓		✓	✓	✓		✓		✓	✓	✓	✓		✓		
Coastal settlements		✓	✓		✓	✓					✓		✓	✓		✓		
Shipping		✓	✓		✓					✓						✓		
Petroleum industry		✓	✓		✓					✓						✓		

Notes:

- 1. Commonwealth marine areas are listed as a MNES under the EPBC Act. Marine protected areas are marine areas which are recognised to have high conservation value.
- 2. Key ecological features are not MNES and have no legal status in their own right; however, they may be considered as components of the Commonwealth marine area.

3 Implementation

3.1 Overview

This section outlines the following:

- roles and responsibilities for personnel involved in implementing operational and scientific monitoring
- · communications and notification to key external stakeholders
- review and revision schedule for this OSMP
- environmental performance outcomes, standards and measurement criteria related to this OSMP.

3.2 Roles and responsibilities

Beach is responsible for the implementation and adherence to the requirements of this OSMP for events where they are the Control Agency. Key roles and responsibilities are identified in Table 3-1. Depending on the scale of the event, individual people may perform multiple roles; similarly, multiple people may share the same role. The Emergency Response Team (EMT) Leader (or delegate) is the key position responsible for overseeing the implementation of this OSMP (Table 3-1).

For oil spill events where the Control Agency is not Beach (e.g. vessel spills in Commonwealth waters), the relevant Control Agency would be responsible for the initiation and implementation of response phase (i.e. operational) monitoring requirements (AMSA 2019). It is noted that implementation may be delegated to another agency or company (including Beach) to provide services. Beach maintains the responsibility to initiate and implement the recovery phase (i.e. scientific) monitoring, in conjunction with support agencies, local government and statutory authorities where relevant.

Where the OSMP is activated the EMT Environment Leader will work in collaboration with the Monitoring Provider Program Manager. The Monitoring Provider Program Manager (over 20 years' experience and training) will manage the monitoring programs advised by Monitoring Provider Study Leads (a monthly log of the Monitoring Provider personnel is provided to Beach to ensure that they have the appropriate levels of training and experience). The Monitoring Provider Study Leads will direct any offshore monitoring that may be required in the event of an oil spill. Beach personnel will provide the resources to allow the monitoring to be undertaken in a safe manner.

Table 3-1: Roles and responsibilities for OSMP implementation

Role	Timing	Responsibilities
Emergency Management Team (EMT) Leader	Emergency response	 Overall responsibility for providing and coordinating operational emergency management activities
		Equivalent to role of Incident Controller
		 Overall responsibility for implementation of this OSMP during an oil spill response
		 Overall responsibility for ensuring safe operations during OSMP implementation
EMT Environment Leader	Emergency response	Implementation of the OSMP
	Ongoing	Initiation of operational and scientific monitoring studies
		Termination of operational and scientific monitoring studies
		Interface with EMT, Planning and Logistics Leaders and Monitoring Provider

Role	Timing	Responsibilities
		Activation of Monitoring Provider/s
		Day-to-day coordination of operational and scientific monitoring
		 Review and approval of operational and scientific monitoring plans and data reports
		Interface with external agencies including NOPSEMA, DJPR and DPIPWE
EMT Planning Leader (or	Emergency response	 Interface with EMT Environment Leader for OSMP implementation (as required)
delegate)		Provides operational monitoring data to EMT to support response planning
EMT Logistics Leader (or	Emergency response	 Interface with EMT Environment Leader for OSMP implementation (as required)
delegate)		 Support (as required) for implementing operational monitoring (e.g. site access etc.)
		 Support (as required) for mobilising plant and equipment (e.g. vessels, air support, vehicles etc.)
Emergency Management Liaison Officer (EMLO)	Emergency response	Interface between Beach EMT and State Control Agency Incident Management Team (IMT)
Monitoring Provider – Program Manager	Emergency response Ongoing	 Work in collaboration with the EMT Environment Leader to implement the OSMP studies
		Interface with Monitoring Provider Study Leads and EMT Environment Leader
		 Manage the monitoring programs advised by Monitoring Provider Study Leads
		 Provide Beach with a monthly log of the Monitoring Provider personnel available to implement the OSMP
Monitoring Provider – Study	Emergency response Ongoing	 Interface with Monitoring Provider Program Manager and/or EMT Environment Leader
Lead	ongoing	• Implementation of individual monitoring studies (as required)
		Prepare monitoring plans and sampling procedures
		Review and approve data reports
		Ensure compliance with requirements of this OSMP
Monitoring	Emergency response	Undertake field sampling and observations
Provider – Field Personnel	Ongoing	Ensure compliance with requirements of this OSMP
Monitoring	Emergency response	Prepare data reports
Provider – Office Personnel	Ongoing	Ensure compliance with requirements of this OSMP

3.3 Capability, training and competency

Personnel involved in implementing this OSMP may be sourced from both internal (i.e. Beach) and external (e.g. Monitoring Provider) resources. The number of personnel needed to fulfil roles for any given event depends on the event's circumstances. Depending on the scale of the event, individual people may perform multiple roles; similarly, multiple people may share the same role.

3.3.1 Capability

A capability needs assessment for the implementation of the OSMP studies is included in the OSMP Addendum specific to each EP's activities and relevant spill scenarios. The capability needs assessment identifies the minimum number of personnel to manage and implement the OSMP studies and the type of platforms (vessel, aircraft or vehicles) required to perform the studies. The studies have been group where appropriate to ensure effective use of resources.

3.3.2 Training and Competency

Training and competency for Beach EMT roles are described within the Offshore Victoria – Otway Basin Oil Pollution Emergency Plan (OPEP) (CDN/ID S4100AH717907) and the BassGas Offshore OPEP (CDN/ID 3972816). This training matrix includes OSMP Awareness training for all relevant personnel.

Minimum competency requirements for individuals to fulfil OSMP-specific roles are identified within the operational and scientific monitoring study tables (Section 4 and 5). Minimum competencies can vary from degree qualified and experienced personnel (e.g. typical requirement for Study Leads) to an awareness level (e.g. typical for immediate response phase field sampling).

3.3.2.1 Internal resources

Internal capability within Beach includes offices and personnel based in Perth (Western Australia), Adelaide (South Australia), Melbourne (Victoria) and New Plymouth (New Zealand). Internal resources with appropriate environmental and/or oil spill response competencies will fulfil the OSMP-related roles of:

- EMT Leader
- EMT Environment Leader.

Internal Beach personnel may also perform Monitoring Provider (Study Lead, Field Personnel and Office Personnel) roles and responsibilities, particularly during first-response operational monitoring.

3.3.2.2 External resources

External personnel will primarily perform Monitoring Provider (Program Manager, Study Lead, Field Personnel and Office Personnel) roles and responsibilities, particularly during scientific monitoring.

External resources and capability are reviewed prior to an activity commencing to ensure appropriate agreements / activations are in place (see Section 3.7).

3.4 Monitoring

This OSMP lists a series of possible operational and scientific monitoring studies (with types of sampling techniques and parameters) that may be undertaken in the event of a spill; these studies are outlined in Sections 4 and 5. This OSMP is not intended to be prescriptive, but to provide a flexible framework such that the finalised monitoring studies are fit for purpose and tailored to the specific location, oil type, environmental sensitivities, and the nature and scale of the individual spill.

In the event of a Level 2 and Level 3 oil spill, a series of steps beginning with the preparation of an appropriate Sampling and Analysis Plan (SAP) is implemented (Figure 3-1). While the decision to initiate and terminate a particular study is the responsibility of Beach (EMT Environment Leader), the SAP, field survey and reporting is primarily undertaken by the

Operational and Scientific Monitoring Plan

CDN/ID S4100AH717908

Monitoring Provider (Beach personnel may undertake or assist with operational monitoring, particularly during initial response phase).

Figure 3-1 also shows the flow of information (grey dashed lines) between the operational and scientific monitoring streams and associated OPEP processes.

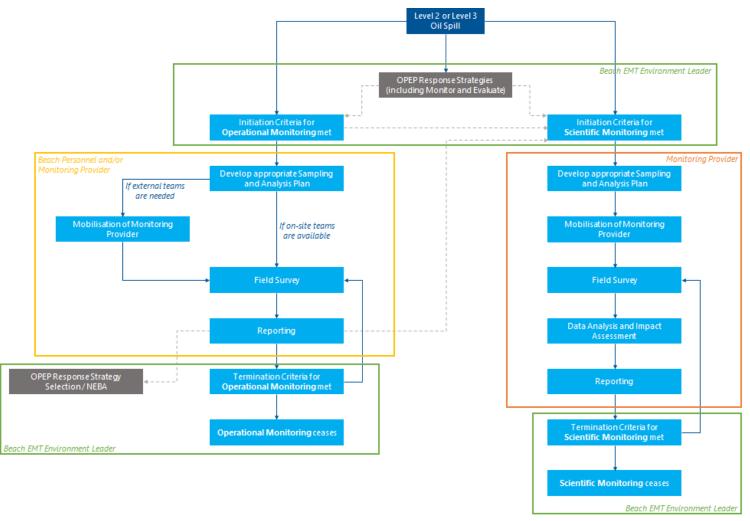


Figure 3-1: Implementation process for operational and scientific monitoring

3.5 Communication and notification

Stakeholder (including regulators) consultation and external notification requirements are described in the activity-specific EPs. This includes the requirement to consult with:

- Department of Jobs, Precincts and Regions (Victoria) and/or Department of Primary Industries, Parks, Water and Environment (Tasmania), in the event that an oil spill is likely to impact State waters
- Department of the Environment and Energy (DoEE), in the event that an oil spill is likely to impact matters of national environmental significance
- Director of National Parks, in the event that an oil spill and/or response activity are likely to impact an Australian Marine Park.

Consultation may also be undertaken with the above agencies or additional agencies (e.g. Heritage Victoria) in the event of a Level 2 or Level 3 oil spill with respect to input and/or review of a spill-specific Sampling and Analysis Plan (SAP) for scientific monitoring studies.

3.6 Review and revisions

This Offshore Victoria OSMP is subject to review, and revised if necessary, on an annual basis to incorporate the following:

- Significant change in the oil spills risks associated with Beach activities and/or facilities within offshore Victorian waters
- Significant environmentally relevant changes (e.g. changes to relevant legislation, stakeholder information, MNES, State/Commonwealth management plans, or availability of new literature)
- Findings from internal or external audits or exercises
- Lessons learned following any actual spill event.

Review records will be detailed in Beach Document Information and History tables (Section 7). Subsequent revisions to the OSMP (or supporting guides and procedures) will be actioned and closed-out as soon as practicable following the review.

As part an EP, Regulation 19 of the OPGGS(E)R also provides for the revision of the OSMP at least 14 days before the end of the period of five years from the most recent approval of an associated EP.

3.7 Environmental Performance Outcomes

Environmental performance outcomes, standards and measurement criteria related to this OSMP have been defined in Table 3-2.

Table 3-2: Environmental Performance Outcomes, Standards and Measurement Criteria

Environmental Performance Outcome	Control Measure	Environmental Performance Standard	Responsible Person	Measurement Criteria
Outcome Undertake oil spill response in a manner that will not result in additional impacts to marine environment, coastal habitat and oiled wildlife.	NOPSEMA accepted Operational and Scientific Monitoring Plan	Operational and scientific monitoring capability shall be maintained in accordance with the OSMP: • a month prior to the commencement of drilling a review of the contracted OSMP provider/s capability will be undertaken by Beach to ensure that the OSMP requirements can be met by the contracted OSMP provider/s. • during drilling the contracted OSMP provider/s will provide a monthly report to show that capability as	Senior Crisis, Emergency & Security Advisor	Outcomes of internal audits and tests demonstrate preparedness
		 detailed in the OSMP is maintained. the contracted OSMP provider/s capability to meet the requirements detailed in the OSMP will be tested prior to commencing drilling. 		

Based on template: AUS 1000 IMT TMP 14376462_Revision 3_Issued for Use _06/03/2019_LE-SystemsInfo-Information Mgt.

4 Operational Monitoring

4.1 Overview

The following sections outline the individual operational monitoring studies that may be implemented in the event of a Level 2 or Level 3 oil spill to the marine or coastal environment. The tables describe the objective, initiation and termination criteria, timing, monitoring (types of sampling techniques and parameters), reporting, resources and competencies.

The studies are presented separately below; however, in practice they may be undertaken simultaneously.

Six operational monitoring studies have been identified:

- O1: Oil characterisation and behaviour
- O2: Water quality
- O3: Sediment quality
- O4: Marine fauna surveillance
- O5: Dispersant efficacy
- O6: Fish tainting.

The operational monitoring studies described in this OSMP complement the Monitor and Evaluate response strategy described in the OPEP in providing information to support decision-making around response activity.

Note: due to the rapid weathering characteristics of gas condensate and marine diesel, operational monitoring studies O1, O2, O3 and O4 are not considered relevant for a pipeline rupture or vessel collision event where there is only a short period of oil release. The time that would elapse between a spill occurring and monitoring personnel being on site would render the data collected unnecessary in informing response strategies. Studies O1, O2, O3 and O4 are, therefore, only actioned (once initiation criteria are met) as a result of a loss of well control incident.

4.1.1 General design considerations

An event-specific sampling and analysis plan (SAP), appropriate to the nature and scale of the event, should be developed and in place before conducting field sampling. The following items should be considered when developing the SAP:

• Nature and scale of the spill (e.g. surface or subsea release, instantaneous or ongoing release, etc.)

Based on template: AUS 1000 IMT TMP 14376462_Revision 3_Issued for Use _06/03/2019_LE-SystemsInfo-Information Mqt.

- The environment which may be affected (e.g. subtidal or intertidal, depth, presence of other sensitive receptors, etc.)
- Program design aims, which may include but, not limited to the determination of the extent of oil, and the spatial and temporal distribution of the oil
- The sampling plan should have flexibility to be adjusted based on conditions in the field and as new information about the even becomes available

- The number of sites and samples to be collected should be spill-specific and take into account level of effort, potential logistical limitations, weather conditions, sample holding times, freight/transport options etc. that if not properly managed can compromise sample integrity
- Where time permits, appropriate QA/QC samples should be collected to allow assessment of local variability and ascertain potential for introduction of sample contamination throughout the collection and analysis process
- Appropriate QA/QC protocols for sample handling, storage and transport should be included to limit the potential for contamination and ensure sample integrity meets laboratory requirements.
- Monitoring frequency should consider weathering of the spilled oil, with frequency decreasing as the rate of change in the spilled oil decreases (i.e. monitoring effort is concentrated towards the beginning of a spill)
- Subsea sampling in the vicinity of project infrastructure should be designed to avoid damage to or entanglement with this infrastructure
- Health and safety factors associated with working in a range of environments with consideration of prevailing weather.

4.2 Study O1: Oil characterisation and behaviour

An overview of the key components of Study O1 are provided below:

Component	Description
Objective	To provide an assessment of the oil properties and visual observations of the behaviour and weathering of the spilled oil
Initiation trigger	 The EMT Environment Leader (or delegate) has confirmed that a Level 2 or Level 3 offshore oil spill has occurred or The EMT Environment Leader (or delegate) advises that either full or partial implementation of the
	study is to commence
Termination trigger	 Any related scientific monitoring studies have been initiated by the EMT Environment Leader (or delegate) and
	 The EMT Environment Leader (or delegate) considers that continuation of monitoring under Study O1 will not result in a change to the scale or location of active response options or
	 The EMT Environment Leader (or delegate) has advised that agreement has been reached with the Jurisdictional Authority relevant to the spill to terminate the response or
	The EMT Environment Leader (or delegate) has advised that continuation of monitoring under Study O1 may increase overall environmental impact
Timing	Where required, the Monitoring Provider/s will be activated (refer to the relevant OSMP Addendum for the petroleum activities) within 4 hours of initiation criteria being met
	Where required, an initial SAP to be available within 12 hours of initiation criteria being met
	Field surveys to commence within 24 hours of initiation criteria being met
	Note: the initial SAP may be revised as required due to the nature of an ongoing spill event, changing operational requirements and/or results from data collected to date
	Note: timing of mobilisation and field surveys is dependent on safe operating conditions (e.g. weather, sea state, etc.) and operational access to sites
Sampling Techniques	Sampling techniques will vary depending on the individual event and final monitoring design. The following types of sampling may be implemented under Study O1:
	Vessel or shore-based

Component	Description
	Collection of an oil sample
	 Surface skimming (sampling pole with container)
	Oleophilic absorbent pads
	Behaviour and weathering
	 Visual observations
Standard Operating Procedures	The following references are provided as guides for standard operating procedures (SOP) that may be implemented under Study O1:
	Oil Spill Monitoring Handbook (Hook et al 2016)
	SOP will be confirmed by the Monitoring Provider during preparation of the Sampling and Analysis Plan (SAP).
Parameters	Sampling parameters will vary depending on the individual event and final monitoring design. The following types of parameters may be analysed under Study O1:
	Physical properties (e.g. viscosity, pour point, density, wax content)
	Chemical properties (e.g. hydrocarbon characterisation, volatile content)
	Oil component concentrations (e.g. TRH, BTEX, PAH, MAH)
	 Visual records of extent and state (e.g. colour/optical effect on surface, form (slick, emulsion, mousse etc), presence waxy residue)
Guidelines	N/A
Reporting	Results from laboratory sampling reported as available to EMT Environment Leader
	Final report prepared within one-week of termination criteria being met and report provided to EMT Environment Leader
Key Resources	Monitoring Provider or Responder Personnel
	• Vessels
	Analytical laboratory services
Key Competencies	Monitoring Provider – Study Lead
	 Bachelor degree in environmental science/engineering from a recognised institution or equivalent tertiary study in technical area
	Minimum 10 years experience in environmental practice
	 Familiarisation with relevant requirements of the OSMP and OPEP
	Monitoring Provider – Field Personnel
	 Familiarisation with oil sampling and recording techniques
	Vessel provider
	 Certificate of survey with appropriate service category
	Analytical laboratory
	° NATA accredited

4.3 Study O2: Water quality

An overview of the key components of Study O2 are provided below:

Component	Description	
Objective	To provide a rapid assessment of the presence, type and concentrations of oil (and dispersant chemicals where relevant) in offshore and intertidal waters	

Component	Description
Initiation trigger	The EMT Environment Leader (or delegate) has confirmed that a Level 2 or Level 3 offshore oil spill has occurred or
	 The EMT Environment Leader (or delegate) advises that either full or partial implementation of the study is to commence
Termination trigger	 Any related scientific monitoring studies have been initiated by the EMT Environment Leader (or delegate) and
	 The EMT Environment Leader (or delegate) considers that continuation of monitoring under Study O2 will not result in a change to the scale or location of active response options or
	• The EMT Environment Leader (or delegate) has advised that agreement has been reached with the Jurisdictional Authority relevant to the spill to terminate the response or
	The EMT Environment Leader (or delegate) has advised that continuation of monitoring under Study O2 may increase overall environmental impact
Timing	Where required, the Monitoring Provider/s will be activated (refer to the relevant OSMP Addendum for the petroleum activities) within 4 hours of initiation criteria being met
	Where required, an initial SAP to be available within 12 hours of initiation criteria being met
	Field surveys to commence within 24 hours of initiation criteria being met
	Note: the initial SAP may be revised as required due to the nature of an ongoing spill event, changing operational requirements and/or results from data collected to date
	Note: timing of mobilisation and field surveys is dependent on safe operating conditions (e.g. weather, sea state, etc.) and operational access to sites
Sampling Techniques	Sampling techniques will vary depending on the individual event and final monitoring design. The following types of sampling may be implemented under Study O2:
	Surface water sample collection
	Sampling pole with container
	Hose with peristaltic pump
	Sub-surface water sample collection
	Niskin bottle (or similar)
	Hose with peristaltic pump
	In-situ profiles
	Physio-chemical profiles
	° Fluorometer
Standard Operating Procedures	The following references are provided as guides for standard operating procedures that may be implemented under Study O2:
	Oil Spill Monitoring Handbook (Hook et al 2016)
	SOP will be confirmed by the Monitoring Provider during preparation of the SAP.
Parameters	Sampling parameters will vary depending on the individual event and final monitoring design. The following types of parameters may be analysed under Study O2:
	Oil concentrations (e.g. TRH, BTEX, PAH, MAH)
	Physical parameters (e.g. temperature, salinity, DO, pH)
	FluorescenceDispersant chemicals (if applied)
Guidelines	The following references are provided as guidelines or thresholds that may be appropriate for comparison of results during Study O2:
	 Australian and New Zealand Water Quality Guidelines for Fresh and Marine Waters Quality (ANZG 2018)
	Oil spill modelling (NOPSEMA 2019)

Component	Description
Reporting	 Results from in-situ sampling reported daily to the EMT Environment Leader Results from laboratory sampling reported as available to EMT Environment Leader Final report prepared within one-week of termination criteria being met and report provided to EMT Environment Leader
Key Resources	 Monitoring Provider Vessels Analytical laboratory services
Key Competencies	 Monitoring Provider – Study Lead Bachelor degree in environmental science/engineering from a recognised institution or equivalent tertiary study in technical area Minimum 10 years experience in environmental practice Familiarisation with relevant requirements of the OSMP and OPEP Monitoring Provider – Field Personnel Familiarisation with oil and water sampling and recording techniques Vessel provider Certificate of survey with appropriate service category Analytical laboratory NATA accredited

4.4 Study O3: Sediment quality

An overview of the key components of Study O3 are provided below:

Component	Description
Objective	To provide a rapid assessment of the presence, type and concentrations of oil (and dispersant chemicals where relevant) in offshore, intertidal and shoreline sediments
Initiation trigger	 The EMT Environment Leader (or delegate) has confirmed that a Level 2 or Level 3 offshore oil spill has occurred and data from the OPEP Monitor and Evaluate response strategy indicates potential and/or actual sediment contact or The EMT Environment Leader (or delegate) advises that either full or partial implementation of the
	study is to commence
Termination trigger	 Any related scientific monitoring studies have been initiated by the EMT Environment Leader (or delegate) and
	 The EMT Environment Leader (or delegate) considers that continuation of monitoring under Study O3 will not result in a change to the scale or location of active response options or
	 The EMT Environment Leader (or delegate) has advised that agreement has been reached with the Jurisdictional Authority relevant to the spill to terminate the response or
	 The EMT Environment Leader (or delegate) has advised that continuation of monitoring under Study O3 may increase overall environmental impact
Timing	Where required, the Monitoring Provider/s will be activated (refer to the relevant OSMP Addendum for the petroleum activities) within 4 hours of initiation criteria being met
	Where required, an initial SAP to be available within 12 hours of initiation criteria being met
	Field surveys to commence within 24 hours of initiation criteria being met
	Note: the initial SAP may be revised as required due to the nature of an ongoing spill event, changing operational requirements and/or results from data collected to date

Component	Description
	Note: timing of mobilisation and field surveys is dependent on safe operating conditions (e.g. weather, sea state, etc.) and operational access to sites
Sampling Techniques	Sampling techniques will vary depending on the individual event and final monitoring design. The following types of sampling may be implemented under Study O3: • Subtidal sample collection • Grab or core sampler • Intertidal/shoreline sample collection
	Cores or augerSediment box
Standard Operating Procedures	The following references are provided as guides for standard operating procedures that may be implemented under Study O3: Oil Spill Monitoring Handbook (Hook et al 2016) SOP will be confirmed by the Monitoring Provider during preparation of the SAP.
Parameters	Sampling parameters will vary depending on the individual event and final monitoring design. The following types of parameters may be analysed under Study O3: Oil concentrations (e.g. TRH, BTEX, PAH, MAH) Dispersant chemicals (if applied) Total organic carbon Physical parameters (e.g. PSD)
Guidelines	 The following references are provided as guidelines or thresholds that may be appropriate for comparison of results during Study O3: Australian and New Zealand Water Quality Guidelines for Fresh and Marine Waters Quality (ANZG 2018) Oil spill modelling (NOPSEMA 2019)
Reporting	 Results from in-situ observations reported daily to the EMT Environment Leader Results from laboratory sampling reported as available to EMT Environment Leader Final report prepared within one-week of termination criteria being met and report provided to EMT Environment Leader
Key Resources	 Monitoring Provider Vessels (island access) Vehicles (mainland access) Analytical laboratory services
Key Competencies	 Monitoring Provider – Study Lead Bachelor degree in environmental science/engineering from a recognised institution or equivalent tertiary study in technical area Minimum 10 years experience in environmental practice Familiarisation with relevant requirements of the OSMP and OPEP Monitoring Provider – Field Personnel Familiarisation with sediment sampling and recording techniques Vessel provider Certificate of survey with appropriate service category Analytical laboratory NATA accredited

4.5 Study O4: Marine fauna surveillance

An overview of the key components of Study O4 are provided below:

Component	Description
Objective	To provide a rapid assessment of the presence, type and location of oiled marine fauna
Initiation trigger	 The EMT Environment Leader (or delegate) has confirmed that a Level 2 or Level 3 offshore oil spill has occurred or The EMT Environment Leader (or delegate) advises that either full or partial implementation of the study is to commence
Termination trigger	 Any related scientific monitoring studies have been initiated by the EMT Environment Leader (or delegate) and The EMT Environment Leader (or delegate) considers that continuation of monitoring under Study
	 O4 will not result in a change to the scale or location of active response options or The EMT Environment Leader (or delegate) has advised that agreement has been reached with the Jurisdictional Authority relevant to the spill to terminate the response or
	 The EMT Environment Leader (or delegate) has advised that continuation of monitoring under Study O4 may increase overall environmental impact
Timing	Where required, the Monitoring Provider/s will be activated (refer to the relevant OSMP Addendum for the petroleum activities) within 4 hours of initiation criteria being met
	Where required, an initial SAP to be available within 12 hours of initiation criteria being met
	Field surveys to commence within 24 hours of initiation criteria being met
	Note: the initial SAP may be revised as required due to the nature of an ongoing spill event, changing operational requirements and/or results from data collected to date
	Note: timing of mobilisation and field surveys is dependent on safe operating conditions (e.g. weather, sea state, etc.) and operational access to sites
Sampling Techniques	Sampling techniques will vary depending on the individual event and final monitoring design. The following types of sampling may be implemented under Study O4:
	Systematic surveillance
	 Aerial observations from fixed-wing or helicopter
	 Vessel-based observations
	o On-ground shoreline observations
	Unmanned surveillance
	UAV and/or satellite
	Opportunistic / incidental observations
	Carcass collection and tissue sampling
Standard Operating Procedures	The following references are provided as guides for standard operating procedures that may be implemented under Study O4:
	Oil Spill Monitoring Handbook (Hook et al 2016)
	SOP will be confirmed by the Monitoring Provider during preparation of the SAP
Parameters	Sampling parameters will vary depending on the individual event and final monitoring design. The following types of parameters may be recorded under Study O4 where possible:
	Presence and identification (species group / species) of oiled fauna
	State of oiled fauna
	Presence and state of any carcass
Guidelines	N/A
Reporting	Results from in-situ observations reported daily to the EMT Environment Leader

Component	Description
	Final report prepared within one-week of termination criteria being met and report provided to EMT Environment Leader
Key Resources	 Monitoring Provider Vessels Aircraft Vehicles
Key Competencies	 Monitoring Provider – Study Lead Bachelor degree in environmental science/engineering from a recognised institution or equivalent tertiary study in technical area Minimum 10 years experience in environmental practice Familiarisation with relevant requirements of the OSMP and OPEP Monitoring Provider – Field Personnel Familiarisation with the fauna observation and recording techniques Oiled, injured, and diseased fauna handling to be undertaken by trained personnel Vessel provider Certificate of survey with appropriate service category Aircraft Current registration with CASA Analytical laboratory NATA accredited

4.6 Study O5: Dispersant efficacy

An overview of the key components of Study O5 are provided below:

Component	Description
Objective	Determine the effectiveness of dispersant application and reduce surface VOCs (where relevant)
Initiation trigger	 The EMT Environment Leader (or delegate) has confirmed that a Level 2 or Level 3 offshore oil spill has occurred and the Chemical Dispersant response strategy from the OPEP has been selected for use
Termination trigger	 Any related scientific monitoring studies have been initiated by the EMT Environment Leader (or delegate) and
	 The EMT Environment Leader (or delegate) considers that continuation of monitoring under Study O5 will not result in a change to the scale or location of active response options or
	 The EMT Environment Leader (or delegate) has advised that agreement has been reached with the Jurisdictional Authority relevant to the spill to terminate the response or
	The EMT Environment Leader (or delegate) has advised that continuation of monitoring under Study O5 may increase overall environmental impact
Timing	Study O5 is to be undertaken at the same time as the Chemical Dispersant response strategy
Sampling Techniques	Sampling techniques will vary depending on the individual event and final monitoring design. The following types of sampling and surveillance may be implemented under Study O5:
	Visual observations
	Aerial or vessel based
	Oil and water sampling

Component	Description
	 Water sampling techniques as per Study O1 (e.g. niskin bottle, hose with peristaltic pump, etc.) Fluorometer Underwater video surveillance Air quality monitoring In-situ detectors
Standard Operating Procedures	 The following references are provided as guides for standard operating procedures that may be implemented under Study O5: Oil Spill Monitoring Handbook (Hook et al 2016) Industry Recommended Subsea Dispersant Monitoring Plan (American Petroleum Institute 2013) Dispersant Application Monitoring Field Guide Tier I Visual Observation (OSRL 2011) Special Monitoring of Applied Response Technologies (NOAA 2006) SOP will be confirmed by the Monitoring Provider during preparation of the SAP
Parameters	Sampling parameters will vary depending on the individual event and final monitoring design. The following types of parameters may be analysed under Study O5: Oil concentrations (e.g. TRH, BTEX, PAH, MAH) Fluorescence VOCs and %LELs
Guidelines	 The following references are provided as guidelines or thresholds that may be appropriate for comparison of results during Study O5: Australian and New Zealand Water Quality Guidelines for Fresh and Marine Waters Quality (ANZG 2018) Oil spill modelling (NOPSEMA 2019) Workplace Exposure Standards for Airborne Contaminants (Safe Work Australia 2018)
Reporting	 Results from in-situ observations reported daily to the EMT Environment Leader Final report prepared within one-week of termination criteria being met and report provided to EMT Environment Leader
Key Resources	Monitoring ProviderVesselsAircraft
Key Competencies	 Monitoring Provider – Study Lead Bachelor degree in environmental science/engineering from a recognised institution or equivalent tertiary study in technical area Minimum 10 years experience in environmental practice Familiarisation with relevant requirements of the OSMP and OPEP Monitoring Provider – Field Personnel Familiarisation with vessel-based and/or aerial-based oil spill monitoring Familiarisation with relevant sampling techniques (e.g. sub-surface video surveillance, use of fluorometer, water sample collection, air quality monitoring) Vessel provider Certificate of survey with appropriate service category Aircraft Current registration with CASA Analytical laboratory NATA accredited

4.7 Study O6: Fish tainting

An overview of the key components of Study O6 are provided below:

Component	Description
Objective	To provide an assessment of the potential of fish tainting in areas of recreational and/or commercial fisheries
Initiation trigger	 The EMT Environment Leader (or delegate) has confirmed that a Level 2 or Level 3 offshore oil spill has occurred and data from Study O2 has confirmed exposure to offshore waters above the ANZG (2018) 99% species protection levels and this exposure occurred in waters that intersect with active fisheries or
	The EMT Environment Leader (or delegate) advises that either full or partial implementation of the study is to commence
Termination trigger	 Any related scientific monitoring studies have been initiated by the EMT Environment Leader (or delegate) and
	• The EMT Environment Leader (or delegate) considers that continuation of monitoring under Study O6 will not result in a change to the scale or location of active response options or
	• The EMT Environment Leader (or delegate) has advised that agreement has been reached with the Jurisdictional Authority relevant to the spill to terminate the response or
	The EMT Environment Leader (or delegate) has advised that continuation of monitoring under Study O6 may increase overall environmental impact
Timing	Where required, the Monitoring Provider/s will be activated (refer to the relevant OSMP Addendum for the petroleum activities) within 4 hours of initiation criteria being met
	Where required, an initial SAP to be available within 12 hours of initiation criteria being met
	Field surveys to commence within 24 hours of initiation criteria being met
	Note: the initial SAP may be revised as required due to the nature of an ongoing spill event, changing operational requirements and/or results from data collected to date
	Note: timing of mobilisation and field surveys is dependent on safe operating conditions (e.g. weather, sea state, etc.) and operational access to sites
Sampling Techniques	Sampling techniques will vary depending on the individual event and final monitoring design. The following types of sampling may be implemented under Study O6:
	Systematic fish sample collection
	Olfactory evaluation
	° Tissue collection
	Opportunistic carcass collection and tissue sampling
Standard Operating Procedures	The following references are provided as guides for standard operating procedures that may be implemented under Study O6:
	Oil Spill Monitoring Handbook (Hook et al 2016)
	Managing Seafood Safety after an Oil Spill (Yender, Michel and Lord 2002)
	SOP will be confirmed by the Monitoring Provider during preparation of the SAP
Parameters	Sampling parameters will vary depending on the individual event and final monitoring design. The following types of parameters may be analysed under Study O6: Odour and appearance
	Chemical analysis of tissue samples (e.g. TRH, BTEX, PAH, MAH)
Guidelines	The following references are provided as guidelines or thresholds that may be appropriate for comparison of results during Study O6:

Component	Description
	Australian and New Zealand Water Quality Guidelines for Fresh and Marine Waters Quality (ANZG 2018)
	Australia New Zealand Food Standards Code
Reporting	Results from laboratory sampling and sensory analysis reported as available to EMT Environment Leader
	Final report prepared within one-week of termination criteria being met and report provided to EMT Environment Leader
Key Resources	Monitoring Provider
	• Vessels
	Analytical laboratory services
Key Competencies	Monitoring Provider – Study Lead
	 Bachelor degree in environmental science/engineering from a recognised institution or equivalent tertiary study in technical area
	Minimum 10 years experience in environmental practice
	 Familiarisation with relevant requirements of the OSMP and OPEP
	Monitoring Provider – Field Personnel
	 Familiarisation with oil and water sampling and recording techniques
	Monitoring Provider – Olfactory Assessment
	 Trained and/or experienced olfactory analysts
	Vessel provider
	 Certificate of survey with appropriate service category
	Analytical laboratory
	NATA accredited

5 Scientific Monitoring

5.1 Overview

The following sections outline the individual scientific monitoring studies that may be implemented in the event of a Level 2 or Level 3 oil spill to the marine or coastal environment. The tables describe the objective, initiation and termination criteria, timing, monitoring (types of sampling techniques and parameters), reporting, resources and competencies.

The studies are presented separately below; however, in practice they may be undertaken simultaneously.

Seven scientific monitoring studies have been identified:

- S1: Water quality impact assessment
- S2: Sediment quality impact assessment
- S3: Subtidal habitats impact assessment
- S4: Intertidal and coastal habitats impact assessment
- S5: Marine fauna impact assessment
- S6: Fisheries impact assessment
- S7: Heritage and socioeconomic impact assessment.

Scientific monitoring generally has objectives relating to attributing cause-effect interactions of the spill or the spill-response activities with changes to the surrounding environment. Where impacts are identified, the studies also have the objective of identifying and recommending remediation activities and monitoring for recovery. Consequently, such studies are required to account for natural or sampling variation, and study designs must be robust and produce defensible data. Scientific monitoring is typically conducted over a wider study area, extending beyond the spill footprint, and a longer time period, extending beyond the spill response.

5.1.1 General design considerations

Guidance on various experimental monitoring approaches for scientific monitoring (e.g. use of baseline data in 'before versus after' analyses, and alternative approaches such as 'control versus impact' and 'gradient approach') is provided in Appendix A.

Termination criteria for some of the scientific monitoring modules require the use of guidelines and/or benchmark values. Where available, Australian guidelines (e.g. ANZG 2018) or regionally relevant data is used. Where these are unavailable for a selected parameter, toxicity screening benchmarks developed by the USEPA in response to the Deepwater Horizon incident (e.g. USEPA 2015), or other international guidelines (e.g. USEPA 2017) may be adopted.

5.2 Study S1: Water quality impact assessment

An overview of the key components of Study S1 are provided below:

Component	Description
Objective	Determine the impact to, and recovery of, offshore and intertidal water quality from oil exposure and/or any impacts associated with response activities
Initiation trigger	 The EMT Environment Leader (or delegate) has confirmed that a Level 2 or Level 3 offshore oil spill has occurred and data from the Study O2 has confirmed exposure to offshore or intertidal waters or
	The EMT Environment Leader (or delegate) advises that either full or partial implementation of the study is to commence
Termination trigger	The EMT Environment Leader (or delegate) considers that:
	 Hydrocarbon concentrations in offshore waters have returned to within the expected natural dynamics of baseline state and/or control sites or
	 Hydrocarbon concentrations in offshore waters are below relevant ANZG (2018) 99% species protection levels or other applicable benchmark values and
	The EMT Environment Leader (or delegate) considers that:
	 Relevant water quality parameter (e.g. chemicals from dispersant) concentrations in offshore waters have returned to within the expected natural dynamics of baseline state and/or control sites or
	 Relevant water quality parameter (e.g. chemicals from dispersant) concentrations in offshore waters are below relevant ANZG (2018) 99% species protection levels or other applicable benchmark values and
	The EMT Environment Leader (or delegate) in conjunction with relevant government agency, considers that water quality values within protected areas (i.e. Australian Marine Parks, Ramsar wetlands or State marine protected areas) have not been impacted or have returned to within the expected natural dynamics of baseline state and
	Agreement has been reached with the Statutory Authority relevant to the spill to terminate the monitoring
Timing	 Monitoring Provider/s will be activated (refer to the relevant OSMP Addendum for the petroleum activities) within 24 hours of initiation criteria being met
	An initial SAP, prepared by the Monitoring Provider, to be available within 48 hours of initiation criteria being met
	Consultation with relevant agencies to commence as soon as practicable after initiation criteria are met
	Field surveys to commence within 72 hours (3 days) of initiation criteria being met
	Note: the initial SAP may be revised following consultation with relevant agencies and/or as required due to the nature of an ongoing spill event, changing operational requirements and/or results from data collected to date
	Note: timing of mobilisation and field surveys is dependent on safe operating conditions (e.g. weather, sea state, etc.) and operational access to sites
Monitoring Design	The following are monitoring designs recommended for different spill extents/behaviour; final design will be confirmed during preparation of the SAP by the Monitoring Provider.
	Spill Extent / Behaviour Monitoring Design
	Spill plume concentrated around source, dissipating with distance Gradient approach
	 Spill plume has dissipated away from source Gradient approach Lines of Evidence
	Nearshore spill or spill reaches shoreline BACI (if appropriate baseline data available)

Beach Energy Limited: ABN 20 007 617 969

Component	Description
	• IvC
	Gradient approach
	 Spill interacts with area of biological importance (e.g. bay/shoal/island) BACI (if appropriate baseline data available) IVC
Scope	All areas (intertidal, offshore) and water depths are included within the scope for Study S1.
·	Note: where Management Plans for protected area (e.g. Australian Marine Parks, State marine protected areas, Ramsar wetlands) exist, the SAP will include consideration of any specific sampling and/or values that require monitoring
Sampling Techniques	Sampling techniques will vary depending on the individual event and final monitoring design. The following types of sampling may be implemented under Study S1: Surface water sample collection Sampling pole with container
	. 5.
	Hose with peristaltic pump
	Sub-surface water sample collection
	Niskin bottle (or similar)
	Hose with peristaltic pump
	• In-situ profiles
	Physio-chemical profiles
	° Fluorometer
	Visual records of any damage or change due to response activities
Sampling Frequency	 Initial sampling frequency will be determined by during preparation of the SAP by the Monitoring Provider
	 Ongoing sampling frequency will be determined by the Monitoring Provider in consultation with the EMT Environment Leader following each monitoring and reporting event until termination criteria are met.
Standard Operating Procedures	The following references are provided as guides for standard operating procedures that may be implemented under Study S1:
	Oil Spill Monitoring Handbook (Hook et al 2016)
	SOP will be confirmed by the Monitoring Provider during preparation of the SAP
Parameters	Sampling parameters will vary depending on the individual event and final monitoring design. The following types of parameters may be analysed under Study S1:
	Oil concentrations (e.g. TRH, BTEX, PAH, MAH)
	Physical parameters (e.g. temperature, salinity, DO, pH)
	Fluorescence
	 Dispersant chemicals (if applied) and/or other water quality parameters as necessary to identify any impacts from response activities
Guidelines	The following references are provided as guidelines or thresholds that may be appropriate for comparison of results during Study S1:
	 Australian and New Zealand Water Quality Guidelines for Fresh and Marine Waters Quality (ANZG 2018)
	Oil spill modelling (NOPSEMA 2019)
	Acute and Chronic Screening Benchmarks for Water and Sediment Quality (USEPA 2015)
	National Recommended Water Quality Criteria - Aquatic Life (USEPA 2017)
Reporting	 Data report to be provided to EMT Environment Leader following the completion of each field survey

Component	Description
	 The data report will also contain on-going trend analysis allowing for the tracking of impacts and recovery, identification/recommendations on any remediation works or active management (including changes to existing sampling or additional sampling required) that should be considered Final impact assessment report (addressing impacts from spill event and any relevant response activities) to be provided to EMT Environment Leader following the termination criteria being met
Key Resources	 Monitoring Provider Vessels Analytical laboratory services
Key Competencies	Monitoring Provider – Study Lead
,	 Bachelor degree in environmental science/engineering from a recognised institution or equivalent tertiary study in technical area
	Minimum 10 years experience in environmental practice
	 Familiarisation with relevant requirements of the OSMP and OPEP
	Monitoring Provider – Field Personnel
	 Bachelor degree in environmental science/engineering from a recognised institution or equivalent tertiary study in technical area
	Minimum 5 years experience in environmental practice
	 Experienced in the relevant sampling and/or recording techniques
	Monitoring Provider – Office Personnel
	 Bachelor degree in environmental science/engineering from a recognised institution or equivalent tertiary study in technical area
	Minimum 5 years experience in environmental practice
	 Experienced in water quality data analysis
	Vessel provider
	 Certificate of survey with appropriate service category
	Analytical laboratory
	NATA accredited

5.3 Study S2: Sediment quality impact assessment

An overview of the key components of Study S2 are provided below:

Based on template: AUS 1000 IMT TMP 14376462_Revision 3_Issued for Use _06/03/2019_LE-SystemsInfo-Information Mgt.

Component	Description
Objective	Determine the impact to, and recovery of, offshore, intertidal and shoreline sediment quality from oil exposure and/or any impacts associated with response activities
Initiation trigger	 The EMT Environment Leader (or delegate) has confirmed that a Level 2 or Level 3 offshore oil spill has occurred and data from the Study O3 has confirmed exposure to shoreline sediments or The EMT Environment Leader (or delegate) advises that either full or partial implementation of the study is to commence
Termination trigger	 The EMT Environment Leader (or delegate) considers that: Hydrocarbon concentrations in sediments have returned to within the expected natural dynamics of baseline state and/or control sites or

Component	Description	
	(Simpson et al. 2013) other applicable b	
	The EMT Environment Leader (or delegate) considers that: On the EMT Environment Leader (or delegate) considers that: On the EMT Environment Leader (or delegate) considers that:	
	 Relevant sediment quality parameter (e.g. chemicals from dispersant) concentrations have returned to within the expected natural dynamics of baseline state and/or control sites or 	
	 Relevant sediment quality parameter (e.g. chemicals from dispersant) concentrations in are below relevant ANZECC/ARMCANZ SQGV (Simpson et al. 2013) other applicable benchmark values and 	
	The EMT Environment Leader (or delegate) in conjunction with relevant government agency, considers that sediment quality values within protected areas (i.e. Australian Marine Parks, Ramsar wetlands or State marine protected areas) have not been impacted or have returned to within the expected natural dynamics of baseline state and	
	Agreement has been reached with the Statute monitoring	ory Authority relevant to the spill to terminate the
Timing	Monitoring Provider/s will be activated (refer to the relevant OSMP Addendum for the petroleum activities) within 24 hours of initiation criteria being met	
	An initial SAP, prepared by the Monitoring Provider, to be available within 48 hours of initiation criteria being met	
	Consultation with relevant agencies to commence as soon as practicable after initiation criteria are met	
	Field surveys to commence within 72 hours (3 days) of initiation criteria being met	
	Note: the initial SAP may be revised following consultation with relevant agencies and/or as required due to the nature of an ongoing spill event, changing operational requirements and/or results from data collected to date	
	Note: timing of mobilisation and field surveys is do sea state, etc.) and operational access to sites	ependent on safe operating conditions (e.g. weather,
Monitoring Design	The following are monitoring designs recommended for different spill extents/behaviour; final design will be confirmed during preparation of the SAP by the Monitoring Provider.	
	Spill Extent / Behaviour	Monitoring Design
	Spill plume concentrated around source, dissipating with distance	Gradient approach
	dissipating with distance	
	dissipating with distance	
	dissipating with distance	Gradient approach
	dissipating with distance Spill plume has dissipated away from source	 Gradient approach Lines of Evidence
	dissipating with distance Spill plume has dissipated away from source	 Gradient approach Lines of Evidence BACI (if appropriate baseline data available)
	dissipating with distance Spill plume has dissipated away from source	 Gradient approach Lines of Evidence BACI (if appropriate baseline data available) IvC
Scope	Spill plume has dissipated away from source Nearshore spill or spill reaches shoreline Spill interacts with area of biological importance (e.g. bay/shoal/island)	 Gradient approach Lines of Evidence BACI (if appropriate baseline data available) IvC Gradient approach BACI (if appropriate baseline data available) IvC
Scope	Spill plume has dissipated away from source Nearshore spill or spill reaches shoreline Spill interacts with area of biological importance (e.g. bay/shoal/island) All areas (shoreline, intertidal, offshore) are include Note: where Management Plans for protected area.	 Gradient approach Lines of Evidence BACI (if appropriate baseline data available) IvC Gradient approach BACI (if appropriate baseline data available) IvC
Scope Sampling Techniques	Spill plume has dissipated away from source Nearshore spill or spill reaches shoreline Spill interacts with area of biological importance (e.g. bay/shoal/island) All areas (shoreline, intertidal, offshore) are include Note: where Management Plans for protected area areas, Ramsar wetlands) exist, the SAP will include	Gradient approach Lines of Evidence BACI (if appropriate baseline data available) IVC Gradient approach BACI (if appropriate baseline data available) IVC HOC Red within the scope for Study S2. Geg. Australian Marine Parks, State marine protected consideration of any specific sampling and/or values
·	Spill plume has dissipated away from source Nearshore spill or spill reaches shoreline Spill interacts with area of biological importance (e.g. bay/shoal/island) All areas (shoreline, intertidal, offshore) are include Note: where Management Plans for protected area areas, Ramsar wetlands) exist, the SAP will include that require monitoring Sampling techniques will vary depending on the in	Gradient approach Lines of Evidence BACI (if appropriate baseline data available) IVC Gradient approach BACI (if appropriate baseline data available) IVC HOC Red within the scope for Study S2. Geg. Australian Marine Parks, State marine protected consideration of any specific sampling and/or values
·	Spill plume has dissipated away from source Nearshore spill or spill reaches shoreline Spill interacts with area of biological importance (e.g. bay/shoal/island) All areas (shoreline, intertidal, offshore) are include Note: where Management Plans for protected area areas, Ramsar wetlands) exist, the SAP will include that require monitoring Sampling techniques will vary depending on the infollowing types of sampling may be implemented	Gradient approach Lines of Evidence BACI (if appropriate baseline data available) IVC Gradient approach BACI (if appropriate baseline data available) IVC ded within the scope for Study S2. A (e.g. Australian Marine Parks, State marine protected consideration of any specific sampling and/or values

Component	Description
	° Cores or auger
	° Sediment box
	Visual records of any damage or change due to response activities
Sampling Frequency	 Initial sampling frequency will be determined by during preparation of the SAP by the Monitoring Provider
	 Ongoing sampling frequency will be determined by the Monitoring Provider in consultation with the EMT Environment Leader following each monitoring and reporting event until termination criteria are met.
Standard Operating Procedures	The following references are provided as guides for standard operating procedures that may be implemented under Study S2:
	Oil Spill Monitoring Handbook (Hook et al 2016)
	SOP will be confirmed by the Monitoring Provider during preparation of the SAP
Parameters	Sampling parameters will vary depending on the individual event and final monitoring design. The following types of parameters may be analysed under Study S2:
	Oil concentrations (e.g. TRH, BTEX, PAH, MAH)
	Dispersant chemicals (if applied)
	Total organic carbon
	Physical parameters (e.g. PSD)
Guidelines	The following references are provided as guidelines or thresholds that may be appropriate for comparison of results during Study S2:
	ANZECC/ARMCANZ SQGV (Simpson et al. 2013)
	Oil spill modelling (NOPSEMA 2019)
	Acute and Chronic Screening Benchmarks for Water and Sediment Quality (USEPA 2015)
Reporting	Data report to be provided to EMT Environment Leader following the completion of each field survey
	 The data report will also contain on-going trend analysis allowing for the tracking of impacts and recovery, identification/recommendations on any remediation works or active management (including changes to existing sampling or additional sampling required) that should be considered
	 Final impact assessment report (addressing impacts from spill event and any relevant response activities) to be provided to EMT Environment Leader following the termination criteria being met
Key Resources	Monitoring Provider
	Vessels (island access)
	Vehicles (mainland access)
	Analytical laboratory services
Key Competencies	Monitoring Provider – Study Lead
	 Bachelor degree in environmental science/engineering from a recognised institution or equivalent tertiary study in technical area
	 Minimum 10 years experience in environmental practice
	 Familiarisation with relevant requirements of the OSMP and OPEP
	Monitoring Provider – Field Personnel
	 Bachelor degree in environmental science/engineering from a recognised institution or equivalent tertiary study in technical area
	Minimum 5 years experience in environmental practice
	 Experienced in the relevant sampling and/or recording techniques

Component	Description	
	Monitoring Provider – Office Personnel	
	 Bachelor degree in environmental science/engineering from a recognised institution or equivalent tertiary study in technical area 	
	 Minimum 5 years experience in environmental practice 	
	Experience in sediment quality data analysis	
	Vessel provider	
	 Certificate of survey with appropriate service category 	
	Analytical laboratory	
	° NATA accredited	

5.4 Study S3: Subtidal habitats impact assessment

An overview of the key components of Study S3 are provided below:

Component	Description	
Objective	Determine the impact to, and recovery of, subtidal habitats from oil exposure and/or any impacts associated with response activities	
Initiation trigger	 The EMT Environment Leader (or delegate) has confirmed that a Level 2 or Level 3 offshore oil spill has occurred and data from the OPEP Monitor and Evaluate response strategy or Study O2 or O3 indicates potential and/or actual exposure to near-bottom waters or sediments or 	
	The EMT Environment Leader (or delegate) advises that either full or partial implementation of the study is to commence	
Termination trigger	• The EMT Environment Leader (or delegate) considers that disturbance parameters (e.g. species composition, percent cover) and health parameters (e.g. leaf condition) have returned to within the expected natural dynamics of baseline state and/or control sites and	
	 The EMT Environment Leader (or delegate) in conjunction with relevant government agency, considers that subtidal habitat quality values within protected areas (i.e. Australian Marine Parks, Ramsar wetlands or State marine protected areas) have not been impacted or have returned to within the expected natural dynamics of baseline state and 	
	Agreement has been reached with the Statutory Authority relevant to the spill to terminate the monitoring	
Timing	 Monitoring Provider/s will be activated (refer to the relevant OSMP Addendum for the petroleum activities) within 24 hours of initiation criteria being met 	
	An initial SAP, prepared by the Monitoring Provider, to be available within 72 hours of the initiation criteria being met	
	Consultation with relevant agencies to commence as soon as practicable after initiation criteria are met	
	Field surveys to commence within 120 hours (5 days) of initiation criteria being met	
	Note: the initial SAP may be revised following consultation with relevant agencies and/or as required due to the nature of an ongoing spill event, changing operational requirements and/or results from data collected to date	
	Note: timing of mobilisation and field surveys is dependent on safe operating conditions (e.g. weather, sea state, etc.) and operational access to sites	
Monitoring Design	The following are monitoring designs recommended for different spill extents/behaviour; final design will be confirmed during preparation of the SAP by the Monitoring Provider.	
	Spill Extent / Behaviour Monitoring Design	

Component	Description	
	Spill plume concentrated around source, dissipating with distance	Gradient approach
	Spill plume has dissipated away from source	 Gradient approach Lines of Evidence
	Nearshore spill or spill reaches shoreline	 BACI (if appropriate baseline data available) lvC Gradient approach Lines of Evidence
	Spill interacts with area of biological importance (e.g. bay/shoal/island)	BACI (if appropriate baseline data available)lvCLines of Evidence
Scope Soft and hard substrate subtidal benthic habitats and their as include: Hard (scleractinian) corals, turf and coralline algae Sponges and other filter feeders Macroalgae (including turf and encrusting coralline algae Kelp		gae alline algae) and seagrasses;
	 Large and conspicuous (i.e. epifaunal) motile invertebrates (e.g. crustaceans and molluscs) Note: where Management Plans for protected area (e.g. Australian Marine Parks, State marine protected areas, Ramsar wetlands) exist, the SAP will include consideration of any specific sampling and/or values that require monitoring 	
Sampling Techniques	Sampling techniques will vary depending on the individual event and final monitoring design. The following types of sampling may be implemented under Study S3:	
	Dive / towed video / drop camera / ROV surve	ys
	° Transects	
	° Quadrats	
	° Sediment grab (for soft-bottom habitat)	
	Remote sensing	
	Biological sample collection	
	Records of any damage or change due to resp	
Sampling Frequency	 Survey timing should coincide with that appropriate for the habitat and/or community of interest Initial sampling frequency will be determined by during preparation of the SAP by the Monitoring Provider 	
	Ongoing sampling frequency will be determined.	ed by the Monitoring Provider in consultation with the toring and reporting event until termination criteria
Standard Operating Procedures	The following references are provided as guides for standard operating procedures that may be implemented under Study S3:	
	 Parks Victoria Standard Operating Procedure for and Hart 2005) 	or Biological Monitoring of Subtidal Reefs (Edmunds
	Oil Spill Monitoring Handbook (Hook et al 201	
	SOP will be confirmed by the Monitoring Provider of	during preparation of the SAP
Parameters	Sampling parameters will vary depending on the in- following types of parameters may be analysed und	
	Habitat/substrate type	

Component	Description
	Abundance and percent cover
	Diversity
	Distribution
	State (e.g. evidence of stress, necrosis, leaf condition etc.)
	Chemical analysis of tissue samples (e.g. TRH, BTEX, PAH, MAH)
Guidelines	The following references are provided as guidelines or thresholds that may be appropriate for comparison of results during Study S3:
	 Australian and New Zealand Water Quality Guidelines for Fresh and Marine Waters Quality (ANZG 2018)
Reporting	Data report to be provided to EMT Environment Leader following the completion of each field survey
	 The data report will also contain on-going trend analysis allowing for the tracking of impacts and recovery, identification/recommendations on any remediation works or active management (including changes to existing sampling or additional sampling required) that should be considered
	 Final impact assessment report (addressing impacts from spill event and any relevant response activities) to be provided to EMT Environment Leader following the termination criteria being met
Key Resources	Monitoring Provider
	• Vessels
	• ROV
Key Competencies	Monitoring Provider – Study Lead
	 Bachelor degree in environmental science/engineering from a recognised institution or equivalent tertiary study in technical area
	Minimum 10 years experience in environmental practice
	 Familiarisation with relevant requirements of the OSMP and OPEP
	Monitoring Provider – Field Personnel
	 Bachelor degree in environmental science/engineering from a recognised institution or equivalent tertiary study in technical area
	 Minimum 5 years experience in environmental practice
	° Commercial dive qualifications
	 Experienced in the relevant sampling and/or recording techniques
	Experienced in commercial ROV operations
	Monitoring Provider – Office Personnel
	 Bachelor degree in environmental science/engineering from a recognised institution or equivalent tertiary study in technical area
	 Minimum 5 years experience in environmental practice
	Experience in identification, analysis and interpretation of benthic habitat data
	Vessel provider
	Certificate of survey with appropriate service category
	Suitable for commercial diving operations

5.5 Study S4: Intertidal and coastal habitats impact assessment

An overview of the key components of Study S4 are provided below:

Component	Description	
Objective	Determine the impact to, and recovery of, intertidal and coastal habitats from oil exposure and/or any impacts associated with response activities	
Initiation trigger		s confirmed that a Level 2 or Level 3 offshore oil spill r and Evaluate response strategy or Study O2 or O3 near-bottom waters or sediments or
	The EMT Environment Leader (or delegate) ad- study is to commence	vises that either full or partial implementation of the
Termination trigger		nsiders that disturbance parameters (e.g. species eters (e.g. leaf condition) have returned to within the nd/or control sites and
	· · ·	conjunction with relevant government agency, within protected areas (i.e. Ramsar wetlands or State red or have returned to within the expected natural
	Agreement has been reached with the Statuto monitoring	ry Authority relevant to the spill to terminate the
Timing	 Monitoring Provider/s will be activated (refer t activities) within 24 hours of initiation criteria l 	to the relevant OSMP Addendum for the petroleum peing met
	 An initial SAP, prepared by the Monitoring Provider, to be available within 72 hours of the initiation criteria being met 	
	Consultation with relevant agencies to comme met	ence as soon as practicable after initiation criteria are
	Field surveys to commence within 120 hours (5 days) of initiation criteria being met	
	Note: the initial SAP may be revised following cons to the nature of an ongoing spill event, changing o collected to date	ultation with relevant agencies and/or as required due perational requirements and/or results from data
		pendent on safe operating conditions (e.g. weather,
Monitoring Design	The following are monitoring designs recommended for different spill extents/behaviour; final design will be confirmed during preparation of the SAP by the Monitoring Provider.	
	Spill Extent / Behaviour	Monitoring Design
	Spill plume concentrated around source, dissipating with distance	Gradient approach
	Spill plume has dissipated away from source	Gradient approachLines of Evidence
	Nearshore spill or spill reaches shoreline	 BACI (if appropriate baseline data available) lvC Gradient approach
		Lines of Evidence
	Spill interacts with area of biological importance (e.g. bay/shoal/island)	 BACI (if appropriate baseline data available) lvC Lines of Evidence

Component	Description
Scope	Intertidal and coastal habitats covered by Study S4 include:
	• Mangroves
	• Saltmarsh
	Macroalgae and seagrass (only those occurring in the intertidal zone)
	 Invertebrates (molluscs, crustaceans) and other rocky, muddy and sandy shore biota occurring in the intertidal zone
	Shoreline/coastal areas
	Note: where Management Plans for protected area (e.g. Ramsar wetlands) exist, the SAP will include consideration of any specific sampling and/or values that require monitoring
Sampling Techniques	Sampling techniques will vary depending on the individual event and final monitoring design. The following types of sampling may be implemented under Study S4:
	Ground / dive / snorkel / drop camera
	° Transects
	° Quadrats
	 Sediment grab (for soft-bottom habitat)
	Remote sensing
	Biological sample collection
	Records of any damage or change due to response activities
Sampling Frequency	Survey timing should coincide with that appropriate for the habitat and/or community of interest
	 Initial sampling frequency will be determined by during preparation of the SAP by the Monitoring Provider
	 Ongoing sampling frequency will be determined by the Monitoring Provider in consultation with the EMT Environment Leader following each monitoring and reporting event until termination criteria are met
Standard Operating Procedures	The following references are provided as guides for standard operating procedures that may be implemented under Study S4:
	 Parks Victoria Standard Operating Procedure for Biological Monitoring of Intertidal Reefs (Hart and Edmunds 2005)
	Oil Spill Monitoring Handbook (Hook et al 2016)
	SOP will be confirmed by the Monitoring Provider during preparation of the SAP
Parameters	Sampling parameters will vary depending on the individual event and final monitoring design. The following types of parameters may be analysed under Study S4:
	Habitat/substrate type
	Abundance and percent cover
	• Diversity
	Distribution
	State (e.g. evidence of stress, necrosis, leaf condition etc.)
	Chemical analysis of tissue samples (e.g. TRH, BTEX, PAH, MAH)
	 Condition and quality of coastal environment (e.g. evidence of disturbance to sediment profile or environmental values from response [shoreline clean-up, oiled wildlife] activities)
Guidelines	The following references are provided as guidelines or thresholds that may be appropriate for comparison of results during Study S4:
	 Australian and New Zealand Water Quality Guidelines for Fresh and Marine Waters Quality (ANZG 2018)
Reporting	Data report to be provided to EMT Environment Leader following the completion of each field survey

Component	Description	
	 The data report will also contain on-going trend analysis allowing for the tracking of impacts and recovery, identification/recommendations on any remediation works or active management (including changes to existing sampling or additional sampling required) that should be considered Final impact assessment report (addressing impacts from spill event and any relevant response activities) to be provided to EMT Environment Leader following the termination criteria being met 	
Key Resources	 Monitoring Provider Vessels (island access) Vehicles (mainland access) 	
Key Competencies	 Monitoring Provider – Study Lead Bachelor degree in environmental science/engineering from a recognised institution or equivalent tertiary study in technical area Minimum 10 years experience in environmental practice Familiarisation with relevant requirements of the OSMP and OPEP Monitoring Provider – Field Personnel Bachelor degree in environmental science/engineering from a recognised institution or equivalent tertiary study in technical area Minimum 5 years experience in environmental practice Experienced in the relevant sampling and/or recording techniques Monitoring Provider – Office Personnel Bachelor degree in environmental science/engineering from a recognised institution or equivalent tertiary study in technical area Minimum 5 years experience in environmental practice Experience in identification, analysis and interpretation of benthic habitat data Vessel provider 	
	Certificate of survey with appropriate service category	

5.6 Study S5: Marine fauna impact assessment

An overview of the key components of Study S5 are provided below:

Component	Description	
Objective	Determine the impact to, and recovery of, marine fauna from oil exposure and/or any impacts associated with response activities	
Initiation trigger	 The EMT Environment Leader (or delegate) has confirmed that a Level 2 or Level 3 offshore oil spill has occurred and data from the Study O4 has confirmed exposure to marine fauna or The EMT Environment Leader (or delegate) advises that either full or partial implementation of the study is to commence 	
Termination trigger	 The EMT Environment Leader (or delegate) considers that disturbance parameters (e.g. population size, breeding success) have returned to within the expected natural dynamics of baseline state and/or control sites and The EMT Environment Leader (or delegate) in conjunction with relevant government agency, considers that protected marine fauna (i.e. threatened or migratory species) have not been impacted or have returned to within the expected natural dynamics of baseline state (including any 	
	assessment against management requirements in Conservation Advices and/or Recovery Plans) and	

Component	Description		
	Agreement has been reached with the Statuto monitoring	ory Authority relevant to the spill to terminate the	
Timing	 Monitoring Provider/s will be activated (refer to the relevant OSMP Addendum for the petroleum activities) within 24 hours of initiation criteria being met 		
	 An initial SAP, prepared by the Monitoring Provider, to be available within 72 hours of initiation criteria being met 		
	Consultation with relevant agencies to commence as soon as practicable after initiation criteria are met		
	Field surveys to commence within 96 hours (4 days) of initiation criteria being met		
	Note: the initial SAP may be revised following cons to the nature of an ongoing spill event, changing c collected to date	sultation with relevant agencies and/or as required due operational requirements and/or results from data	
	Note: timing of mobilisation and field surveys is de sea state, etc.) and operational access to sites	Note: timing of mobilisation and field surveys is dependent on safe operating conditions (e.g. weather,	
Monitoring Design	The following are monitoring designs recommended be confirmed during preparation of the SAP by the	ed for different spill extents/behaviour; final design will e Monitoring Provider.	
	Spill Extent / Behaviour	Monitoring Design	
	Spill reaches shoreline with known roosting/breeding/nesting/haul-out habitat	 BACI (if appropriate baseline data available) Control chart (if appropriate baseline data available) IvC Gradient approach Lines of Evidence 	
	Spill intersects with area of biological importance (e.g. foraging areas)	 BACI (if appropriate baseline data available) Control chart (if appropriate baseline data available) lvC Gradient approach Lines of Evidence 	
Scope	Marine fauna covered by Study S5 include:		
	Seabirds and shorebirds		
	Marine megafauna (pinnipeds, reptiles, sharks)	s, cetaceans)	
	Note: where Conservation Advice and/or Recovery include consideration of any specific sampling and	Plans exist for protected marine fauna, the SAP will /or values that require monitoring	
Sampling Technique	Sampling techniques will vary depending on the individual event and final monitoring design. The following types of sampling may be implemented under Study S5:		
	Systematic surveillance (e.g. transects)		
	 Aerial observations from fixed-wing or helicopter 		
	 Vessel-based observations 		
	 On-ground shoreline observations 		
	Unmanned surveillance		
	 UAV and/or satellite 		
	Tissue sample collection and analysis		
	Opportunistic / incidental observations		
	Carcass collection and tissue sampling		
	Records of any damage or change due to resp.	oonse activities	

Component	Description	
Sampling Frequency	 Survey timing should coincide with that appropriate for the marine fauna of interest Initial sampling frequency will be determined by during preparation of the SAP by the Monitoring Provider Ongoing sampling frequency will be determined by the Monitoring Provider in consultation with the EMT Environment Leader following each monitoring and reporting event until termination criteria are met 	
Standard Operating Procedures	The following references are provided as guides for standard operating procedures that may be implemented under Study S5: Oil Spill Monitoring Handbook (Hook et al 2016) SOP will be confirmed by the Monitoring Provider during preparation of the SAP	
Parameters	Sampling parameters will vary depending on the individual event and final monitoring design. The following types of parameters may be analysed under Study S5: Nest/burrow presence Abundance (adults, juveniles, fledging/hatchling etc) Density Distribution State (e.g. evidence of stress, oil cover, injured etc.) Chemical analysis of tissue samples (e.g. TRH, BTEX, PAH, MAH) Presence and state of any carcass	
Guidelines	The following references are provided as guidelines or thresholds that may be appropriate for comparison of results during Study S4: • Australian and New Zealand Water Quality Guidelines for Fresh and Marine Waters Quality (ANZG 2018)	
Reporting	 Data report to be provided to EMT Environment Leader following the completion of each field survey The data report will also contain on-going trend analysis allowing for the tracking of impacts and recovery, identification/recommendations on any remediation works or active management (including changes to existing sampling or additional sampling required) that should be considered Final impact assessment report (addressing impacts from spill event and any relevant response activities) to be provided to EMT Environment Leader following the termination criteria being met 	
Key Resources	 Monitoring Provider Vessels Aircraft Vehicles Analytical laboratory services 	
Key Competencies	 Monitoring Provider – Study Lead Bachelor degree in environmental science/engineering from a recognised institution or equivalent tertiary study in technical area Minimum 10 years experience in environmental practice Familiarisation with relevant requirements of the OSMP and OPEP Monitoring Provider – Field Personnel Bachelor degree in environmental science/engineering from a recognised institution or equivalent tertiary study in technical area Minimum 5 years experience in environmental practice Experienced in the relevant sampling and/or recording techniques 	

Component	Description
	 Oiled, injured, and diseased fauna handling to be undertaken by trained personnel Monitoring Provider – Office Personnel
	 Bachelor degree in environmental science/engineering from a recognised institution or equivalent tertiary study in technical area
	Minimum 5 years experience in environmental practice
	 Experience in identification, analysis and interpretation of biota data
	Vessel provider
	Certificate of survey with appropriate service category
	Analytical laboratory
	NATA accredited

5.7 Study S6: Fisheries impact assessment

An overview of the key components of Study S6 are provided below:

Component	Description	
Objective	Determine the presence of, and recovery from, oil taint in commercially or recreationally important fish species and/or any impacts associated with response activities	
Initiation trigger	 The EMT Environment Leader (or delegate) has confirmed that a Level 2 or Level 3 offshore oil spill has occurred and data from Study O6 has confirmed the presence of fishing tainting or Allegations of damage are received from commercial fisheries or government agencies or The EMT Environment Leader (or delegate) advises that either full or partial implementation of the study is to commence 	
Termination trigger	The EMT Environment Leader (or delegate) considers that:	
	 Fish or shellfish show no presence of tissue taint or 	
	 PAH levels in fish and shellfish tissue have returned to within the expected natural dynamics of baseline state and/or control sites or 	
	 PAH levels in fish and shellfish tissue are at or below regulatory levels of concern and 	
	Agreement has been reached with the Statutory Authority relevant to the spill to terminate the monitoring	
Timing	 Monitoring Provider/s will be activated (refer to the relevant OSMP Addendum for the petroleum activities) within 24 hours of initiation criteria being met 	
	 An initial SAP, prepared by the Monitoring Provider, to be available within 72 hours of initiation criteria being met 	
	Consultation with relevant agencies to commence as soon as practicable after initiation criteria are met	
	Field surveys to commence within 120 hours (5 days) of initiation criteria being met	
	Note: the initial SAP may be revised following consultation with relevant agencies and/or as required due to the nature of an ongoing spill event, changing operational requirements and/or results from data collected to date	
	Note: timing of mobilisation and field surveys is dependent on safe operating conditions (e.g. weather, sea state, etc.) and operational access to sites	
Monitoring Design	The following are monitoring designs recommended for different spill extents/behaviour; final design will be confirmed during preparation of the SAP by the Monitoring Provider.	
	Spill Extent / Behaviour Monitoring Design	

Component	Description		
	Offshore spill	Gradient approachLines of Evidence	
	Nearshore spill or spill reaches nearshore areas	 BACI (if appropriate baseline data available) IvC Gradient approach Lines of Evidence 	
Sampling Techniques	Sampling techniques will vary depending on the individual event and final monitoring design. The following types of sampling may be implemented under Study S6:		
	Systematic fish sample collection		
	 Olfactory evaluation 		
	° Tissue collection		
	Opportunistic carcass collection and tissue san	npling	
	Records of any damage or change due to resp	onse activities	
Sampling Frequency	Survey timing should coincide with that appropriate the state of	opriate for the fish species of interest	
	Initial sampling frequency will be determined Provider	by during preparation of the SAP by the Monitoring	
	 Ongoing sampling frequency will be determined by the Monitoring Provider in consultation with the EMT Environment Leader following each monitoring and reporting event until termination criteria are met 		
Standard Operating Procedures The following references are provided as guides for standard operating procedures that makes implemented under Study S5:		or standard operating procedures that may be	
	Oil Spill Monitoring Handbook (Hook et al 2016)		
Managing Seafood Safety after an Oil Spill (Yender, Michel and Lord 2002)		nder, Michel and Lord 2002)	
	SOP will be confirmed by the Monitoring Provider	during preparation of the SAP	
Parameters	Sampling parameters will vary depending on the ir following types of parameters may be analysed un		
	Odour and appearance		
	Chemical analysis of tissue samples (e.g. TRH,		
	Fish health indicators and biomarkers (e.g. live	er enzymes, PAH metabolites)	
Guidelines	The following references are provided as guideline comparison of results during Study O1:	es or thresholds that may be appropriate for	
	Australian and New Zealand Water Quality Gu 2018)	uidelines for Fresh and Marine Waters Quality (ANZG	
	Australia New Zealand Food Standards Code		
Reporting	Data report to be provided to EMT Environme survey	ent Leader following the completion of each field	
	and recovery, identification/recommend	ng trend analysis allowing for the tracking of impacts lations on any remediation works or active ting sampling or additional sampling required) that	
	The state of the s	npacts from spill event and any relevant response t Leader following the termination criteria being met	
Key Resources	Monitoring Provider		
	Olfactory Analysis Panel		
	• Vessels		
	Analytical laboratory services		

Component	Description
Key Competencies	Monitoring Provider – Study Lead
	 Bachelor degree in environmental science/engineering from a recognised institution or equivalent tertiary study in technical area
	Minimum 10 years experience in environmental practice
	 Familiarisation with relevant requirements of the OSMP and OPEP
	Monitoring Provider – Field Personnel
	 Bachelor degree in environmental science/engineering from a recognised institution or equivalent tertiary study in technical area
	 Minimum 5 years experience in environmental practice
	 Experienced in the relevant sampling and/or recording techniques
	Monitoring Provider – Office Personnel
	 Bachelor degree in environmental science/engineering from a recognised institution or equivalent tertiary study in technical area
	Minimum 5 years experience in environmental practice
	 Experience in analysis and interpretation of biota data
	Monitoring Provider – Olfactory Assessment Panel
	Trained and/or experienced olfactory analysts
	Vessel provider
	 Certificate of survey with appropriate service category
	Analytical laboratory
	° NATA accredited

5.8 Study S7: Heritage and socioeconomic impact assessment

An overview of the key components of Study S7 are provided below:

Component	Description
Objective	Determine the impact to, and recovery of, heritage and socioeconomic features from oil exposure and/or any impacts associated with response activities
Initiation trigger	 The EMT Environment Leader (or delegate) has confirmed that a Level 2 or Level 3 offshore oil spill has occurred and data from the OPEP Monitor and Evaluate response strategy or Study O2 or O3 indicates potential and/or actual exposure to known areas of heritage or socioeconomic features or Allegations of damage are received from other users (e.g. tourism operators, heritage groups) s or government agencies or The EMT Environment Leader (or delegate) advises that either full or partial implementation of the study is to commence
Termination trigger	 The EMT Environment Leader (or delegate) considers that considers that disturbance parameters (e.g. hydrocarbon visibility and concentration, condition/quality, area usage levels) have returned to within the expected natural dynamics of baseline state and/or control sites and The EMT Environment Leader (or delegate) in conjunction with relevant government agency, considers that heritage and/or socioeconomic features have not been impacted or have returned to within the expected natural dynamics of baseline state and Agreement has been reached with the Statutory Authority relevant to the spill to terminate the
	Agreement has been reached with the Statutory Authority relevant to the spill to terminate the monitoring

Component	Description	
Timing Monitoring Design	Monitoring Provider/s will be activated (refer to the relevant OSMP Addendum for the petroleum activities) within 24 hours of initiation criteria being met An initial SAP, prepared by the Monitoring Provider, to be available within 72 hours of initiation criteria being met Consultation with relevant agencies to commence as soon as practicable after initiation criteria are met Desktop and/or field surveys to commence within 96 hours (4 days) of initiation criteria being met Note: the initial SAP may be revised following consultation with relevant agencies and/or as required due to the nature of an ongoing spill event, changing operational requirements and/or results from data collected to date Note: timing of mobilisation and field surveys is dependent on safe operating conditions (e.g. weather, ea state, etc.) and operational access to sites The following are monitoring designs recommended for different spill extents/behaviour; final design with the confirmed during preparation of the SAP by the Monitoring Provider.	
	Spill Extent / Behaviour Monitoring Design	
	Offshore spill Gradient approach Lines of Evidence	
	 Nearshore spill or spill reaches nearshore areas IvC Gradient approach Lines of Evidence 	
Scope	 Heritage and socioeconomic features covered by Study S7 include: Cultural and heritage features (e.g. World, Commonwealth or National heritage listed places) Indigenous heritage features (e.g. Indigenous Protected Areas, areas with artefacts or other cultural sensitivity) Underwater cultural heritage features (e.g. shipwrecks, sunken artefacts) Socioeconomic features (e.g. tourism and recreational activities, commercial shipping, other marine users) Note: commercial fisheries are included within Study S6. 	
Sampling Techniques	Sampling techniques will vary depending on the individual event and final monitoring design. The following types of sampling may be implemented under Study S7: • Desktop assessment • Identification of heritage and/or socioeconomic features at risk based on direct or indirect change to ambient environmental conditions (e.g. water and sediment quality) or values • Notifications to any relevant government agencies (e.g. Heritage Victoria, Department of the Environment and Energy etc.) as required • Assessment of each affected feature and development of appropriate monitoring and management recommendations and develop appropriate • Field data collection • Visual inspection and records of any changes to condition, exposure to oil, changes in behaviour or use etc. • Systematic surveillance (e.g. transects) using aerial, vessel or on-ground observations as appropriate	
Sampling Frequency	 Records of any damage or change due to response activities Initial sampling frequency will be determined by during preparation of the SAP by the Monitoring Provider 	

Component	Description	
	 Ongoing sampling frequency will be determined by the Monitoring Provider in consultation with the EMT Environment Leader following each monitoring and reporting event until termination criteria are met 	
Standard Operating Procedures	SOP for heritage and socioeconomic studies will be developed in consultation with the appropriate government agency with responsibility for protection of features	
Parameters	Sampling parameters will vary depending on the individual event and final monitoring design. The following types of parameters may be analysed under Study S6: Visual appearance Condition (e.g. evidence of oil cover, damage etc.) Use of parameters from other studies as required (e.g. water and sediment quality monitoring)	
Guidelines	N/A	
Reporting	Data report to be provided to EMT Environment Leader following the completion of each desktop or field survey	
	o The data report will also contain on-going trend analysis allowing for the tracking of impacts and recovery, identification/recommendations on any remediation works or active management (including changes to existing sampling or additional sampling required) that should be considered	
	Final impact assessment report (addressing impacts from spill event and any relevant response activities) to be provided to EMT Environment Leader following the termination criteria being met	
Key Resources	Monitoring Provider	
	• Vessels	
Key Competencies	Monitoring Provider – Study Lead	
	 Bachelor degree in environmental science/engineering from a recognised institution or equivalent tertiary study in technical area 	
	Minimum 10 years experience in environmental practice	
	° Familiarisation with relevant requirements of the OSMP and OPEP	
	Monitoring Provider – Socioeconomic and Heritage Specialist	
	 Bachelor degree in environmental or social science from a recognised institution or equivalent tertiary study in technical area 	
	Minimum 10 years experience in environmental/social practice	
	 Experienced in interpretation and management of heritage, social and economic data 	
	Monitoring Provider – Field Personnel	
	 Bachelor degree in environmental science/engineering from a recognised institution or equivalent tertiary study in technical area 	
	Minimum 5 years experience in environmental practice	
	Experienced in the relevant sampling and/or recording techniques	
	Monitoring Provider – Office Personnel	
	 Bachelor degree in environmental science/engineering from a recognised institution or equivalent tertiary study in technical area 	
	Minimum 5 years experience in environmental practice	
	 Experience in analysis and interpretation of heritage, social and economic data 	
	Vessel provider	
	Certificate of survey with appropriate service category	

6 References/Associated documents

- 1. AMSA. 2019. National Plan for Maritime Environmental Emergencies. Australian Maritime Safety Authority, Australian Government.
- 2. ANZG. 2018. Australian and New Zealand Guidelines for Fresh and Marine Water Quality. Australian and New Zealand Governments.
- 3. APPEA. 2019. (Draft) Joint Industry Operational and Scientific Monitoring Plan Framework. Australian Petroleum Production & Exploration Association.
- 4. API. 2013. Industry Recommended Subsea Dispersant Monitoring Plan. API Technical Report 1152. American Petroleum Institute, Washington, United States of America.
- 5. Beyers, D.W. 1998. Casual inference in environmental impact studies. Journal of the North American Benthological Society. 17: 367–373.
- 6. Downes, B.J., Barmuta, L.A., Fairweather, P.G., Faith, D.P., Keough, M.J., Lake, P.S., Mapstone, B.D., Quinn, G.P. 2002. Monitoring ecological impacts, concepts and practice in flowing waters. Cambridge University Press. Cambridge UK.
- 7. Edmunds, M. and Hart, P. 2005. Parks Victoria Standard Operating Procedure, Biological Monitoring of Subtidal Reefs. Parks Victoria Technical Series No. 9, Parks Victoria, Melbourne, Australia.
- 8. Fabricius, K.E., De'ath, G. 2004. Identifying ecological change and its causes: a case study on coral reefs. Ecological Applications. 14: 1448–1465.
- 9. Gotelli, N.J. and Ellison, A.M. 2004. A primer of Ecological Statistics. Sinauer Associates. Massachusetts, USA.
- 10. Hart, P. and Edmunds, M. 2005. Parks Victoria Standard Operating Procedure, Biological Monitoring of Intertidal Reefs. Parks Victoria Technical Series No. 21, Parks Victoria, Melbourne, Australia.
- 11. Hill, A.B. 1965. The environment and disease: association or causation? Proceedings of the Royal Society of Medicine. 58: 295–300.
- 12. Hook, S., Batley, G., Holloway, M., Irving, P. and Ross, A. (eds). 2016. Oil spill monitoring handbook. Commonwealth Scientific and Industrial Research Organisation (CSIRO) Publishing, Australia.
- 13. McArdle, B.H. 1996. Levels of evidence in studies of competition, predation and disease. New Zealand Journal of Ecology. 20: 7–15.
- 14. NOAA. 2006, Special Monitoring of Applied Response Technologies. National Oceanic and Atmospheric Administration, United States Department of Commerce. Accessed on 23 March 2018, https://response.restoration.noaa.gov/sites/default/files/SMART_protocol.pdf
- 15. NOPSEMA. 2016. Information Paper Operational and scientific monitoring programs. Doc: N-04700-IP1349. National Offshore Petroleum Safety and Environmental Management Authority, Australian Government.
- 16. NOPSEMA. 2018. Guidance Note Oil pollution risk management. Doc: GN1488. National Offshore Petroleum Safety and Environmental Management Authority, Australian Government.

- 17. NOPSEMA. 2019. Bulletin #1 Oil Spill Modelling. Doc: A652993. National Offshore Petroleum Safety and Environmental Management Authority, Australian Government.
- 18. OSRL. 2015. Dispersant Application Monitoring Field Guide, Tier I Visual Observation. Oil Spill Response Limited, United Kingdom.
- 19. Safe Work Australia. 2018. Workplace Exposure Standards for Airborne Contaminants. Safe Work Australia, Canberra.
- 20. Simpson, S., Batley, G. and Chariton, A. 2013. Revision of the ANZECC/ARMCANZ Sediment Quality Guidelines. CSIRO Land and Water Science Report 08/07. CSIRO Land and Water.
- 21. Suter, G.W., 1996. Abuse of hypothesis testing statistics in ecological risk assessment. Human and Ecological Risk Assessment: An International Journal 2: 331-347.
- 22. Underwood, A.J. 1991. Beyond BACI: experimental designs for detecting human environmental impacts on temporal variations in natural populations. Australian Journal of Marine and Freshwater Research 42: 569–587.
- 23. Underwood, A.J. 1994. On beyond BACI: sampling designs that might reliably detect environmental disturbances. Ecological Applications 4: 3–15.
- 24. US EPA. 2015. Acute and Chronic Screening Benchmarks for Water and Sediment Quality EPA Response to BP Spill in the Gulf of Mexico. US Environmental Protection Agency. Available from: https://archive.epa.gov/emergency/bpspill/web/html/index.html. Accessed: June 2018.
- 25. US EPA. 2017. National Recommended Water Quality Criteria Aquatic Life. US Environmental Protection Agency. Available from: https://www.epa.gov/wqc/national-recommended-water-quality-criteria-aquatic-life-criteria-table. Accessed: June 2018.
- 26. Yender, R., J. Michel, and C. Lord. 2002. Managing Seafood Safety after an Oil Spill. Seattle: Hazardous Materials Response Division, Office of Response and Restoration, National Oceanic and Atmospheric Administration.

7 Document information and history

Revision History

Rev	Date	Changes made in document	Reviewer/s	Consolidator	Approver
0	19/06/2019	N/A	PW	GLE	TF
1	04/11/2019	Changes in response NOPSEMA RFFWI 5 September 2019	PW	Xodus	PW
2	19/12/2019	Changes in response NOPSEMA OMR 4 December 2019	PW	Xodus	PW
3	28/01/2020	Changes in response to NOPSEMA RFFWI 14 January 2020	PW	Xodus	PW
4	26/02/2020	Changes in response to NOPSEMA RFFWI 21 February 2020	PW	Xodus	PW

Appendix A Approaches for Scientific Monitoring Design

This appendix provides guidance (as provided in APPEA 2019) on survey design approaches that may be utilised for scientific monitoring:

- Impact versus Control (IvC)
- Gradient of Impacts
- Before-After-Control-Impact (BACI)
- Control Chart
- Lines of Evidence.

The design of monitoring studies should ensure, as far as possible, that the planned monitoring activities are practicable and that the objectives of the study will be met. The design must result in the collection of meaningful data and, where practicable, data that are sufficiently powerful to detect ecologically relevant changes.

The final survey design(s) can depend on a variety of factors, included but not limited to:

- Scale and pattern of potential effects of the spill
- Availability of baseline data and/or ability to rapidly obtain baseline data
- Time frame available to gather pre- and post-spill data
- Availability of operational monitoring data
- Availability of appropriate control sites
- Statistical approach proposed for data analysis
- Range of possible chronic and acute effects on the parameters of concern, based on the characteristics of the spill
- · Monitoring frequency required to ensure short-and long-term impacts are detected
- Legislative requirements
- Available resources and equipment to conduct the work in terms of personnel, logistics, and access.

Note: data collection can depend on several constraints (as outlined above) and on access given logistical and safety constraints applicable to a spill event. Therefore, the survey designs recommended within the implementation guides for each scientific monitoring module, may not be able to be implemented exactly as intended. For example, there may be inadequate number of control sites because of the size of the spill and therefore data collected from an expected BACI design may need to be analysed as a gradient approach etc.


A. 1. Before-After-Control-Impact (BACI) approach

Where appropriate baseline data are available, consideration should be given to developing a beyond BACI monitoring program design (Underwood 1991; 1994) or similar extended BACI design (MBACI), which monitors a range of control and impact sites, and can do so over time (Figure A-1). Where robust, appropriate baseline data for exposure sites are not

available, pre-exposure sampling of locations that lie within the hydrocarbon spill trajectory should be prioritised to obtain baseline data prior to hydrocarbon exposure.

Exposure sites should be selected first, encompassing a representative selection of locations within the area affected by hydrocarbons. Where practicable, the monitoring program design may consider stratified sampling along environmental gradients (e.g. level of hydrocarbon exposure etc.). Comparable control sites beyond the area affected by hydrocarbons should then be selected, with monitoring conducted at all sites. Clearly obtaining control sites pre-exposure can be challenging and is heavily reliant on predicting the extent of hydrocarbon movement.

The suggested statistical analysis of data collected using the BACI approach includes a univariate or multi-factorial analysis of variance (ANOVA) and equivalent non-parametric tests, all of which will compare between treatment (impact versus reference) and time (before versus after). Components of variation may help partition a sum of squares into different sources and describe the importance of factors within tests.

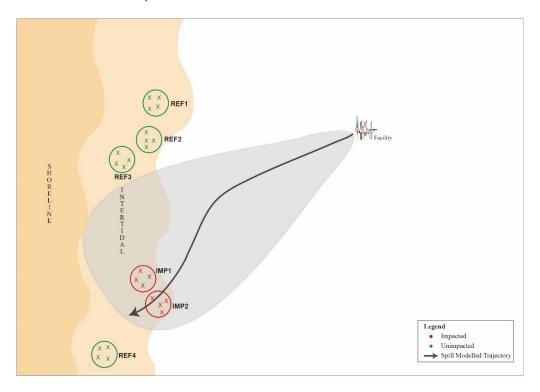

(Source: APPEA 2019)

Notes:

- 1. A modification to the beyond BACI design, is known as an MBACI design. MBACI designs incorporate multiple impact locations, whereas beyond BACI designs include only one impact location.
- 2. The above design consists of four reference/control locations and two impact locations, with four nested sites in each. The number of replicates (e.g. quadrats or transects) per site should be set based on resourcing, and /or the results of the power analysis (if applicable).
- 3. The area affected by the spill is indicated by the grey shaded area, or the area of influence.
- 4. Design assumes the area of influence has been affected equally.

Figure A-1: Example of an MBACI design for shoreline and/or intertidal communities

A. 2. Impact versus Control (IvC) approach

For some locations and receptors, baseline data may not exist, may not be recent and applicable, or was collected using methods that are unrepeatable in the current study. If there is a lack of baseline information that can feed into a BACI design, an IvC approach can be used to assess impacts. However, due to the unknown status of the parameter before impact, there is a higher likelihood of encountering Type I error (falsely concluding that an impact has occurred) with this approach. For example, if the status of the parameter to be measured was already naturally lower at impact sites than control sites before the impact occurred, but this was not measured, a conclusion may be reached using the IvC approach that an impact has occurred when it may be natural variation. For this reason, sampling designs should always try to collect or use baseline data (i.e. aim for a BACI design), and if an IvC design is used, it is important to ensure that the control sites are comparable to the impact sites in every way possible except for the presence or absence of the studied effect (hydrocarbon). This may include, but not be limited to, site physical aspect, substrate, current regimes, and community composition.

Because of the higher likelihood of Type I error, it is also useful to collect additional data on relevant physical environmental parameters that are likely to be different at impact and control sites and may affect the conclusion of the assessment. Biological information may also be relevant, such as degree of sub-lethal and lethal impacts to populations. These parameters can be examined later for any potential co-variance with the observed changes in the parameter of interest, to understand whether hydrocarbons or natural variation affected the outcome. The physical and biological information can therefore augment and act as additional evidence to help interpret conclusions from any IvC analyses. As with the BACI approach, when using the IvC approach it is important to understand the scale of natural variation that may affect the outcome of the assessment by replicating sites within sampling locations and replicating samples within each site.

The suggested statistical approach for analysing the data collected using the IvC approach is a multi-factorial ANOVA (to account for nested data), including PERMANOVA and non-parametric tests, to test whether the level of variation among treatments (IvC) is greater than the level of variation within treatments. Components of variation may help partition variance into different sources and help infer whether the effect of hydrocarbons or spatial variation was responsible for any detected change in the receptors.

A. 3. Gradient approach

The gradient approach can be used in some instances where a lack of suitable control sites prohibits using a BACI or IvC approach. Sampling should be established along a gradient of predicted effect (based on input of data from operational monitoring, surveillance or modelling), with sites established at various distances from the source of impact or along a gradient of magnitudes of concentrations of hydrocarbons. The gradient approach can also be used in combination with a BACI or IvC approach to help infer the cause of a detected impact and describe thresholds of impacts at which a response appears to have occurred. The gradient approach also provides a 'line of evidence' that the source of potential impact (hydrocarbons) was responsible for the observed effect, rather than natural variation. However, care should be taken to ensure awareness of any natural gradients in the parameter measured and take these into account when interpreting the data.

When designing a study using a gradient approach, relevant operational and scientific monitoring data (e.g. water and sediment quality), and modelling should be considered. Prior knowledge or prediction of the likely gradient of effect will greatly improve the efficiency of the sampling design by minimising the collection of data points that provide no additional information in the analysis (e.g. data points showing similar or no effects that do not help to characterise the gradient of effect), though noting these may aid in statistical power of gradient description so shouldn't necessarily be discouraged.

Typically, the level of observed impact will decline at distance from the source of a hydrocarbon release, with this decline likely to be exponential (i.e. large changes close to a release that quickly decrease in severity); therefore, sampling effort can be distributed along the gradient of effect in a way that best characterises the changes in the parameter measured.

If possible, multiple (> two) sites could be sampled at each distance along the gradient (if logistics and time permit) to provide an understanding of small-scale variation. Sites should also be sampled at distances where no environmental effect is predicted or observed, if possible, to characterise the full extent of the effect's gradient.

The suggested statistical analysis for the gradient approach includes correlation analysis between impact (measurements of hydrocarbon/stress; x-axis) and measurement parameter (biological response; y-axis), and associated regression analyses, may include least-squares regression line and hypotheses testing to determine if the trend is significantly different from zero.

A. 4. Control chart approach

The control chart approach is applicable in the following circumstances:

- When long-term (multi-year) datasets exist for the measured parameter;
- When a large amount of natural variation exists in the measured parameter;
- When predicting the expected range of outcomes from an impact.


One of the causal criteria described in the lines of evidence approach is 'strength of association' (Hill 1965), exemplified by a 'larger decline in individuals in areas affected by hydrocarbon than in control areas'. The control chart approach takes this causal criterion a step further and uses rules to establish whether a detected change in a parameter at impact sites is outside what would be expected to occur naturally. This technique requires tracking a parameter over time and determining whether an observed change is within the bounds of what has been observed to occur naturally at that impact site or at control sites.

A control chart has a central line for the mean, an upper control limit (UCL; e.g. typically 3 standard deviations [SD] above the mean), and a lower control limit (LCL; e.g. typically 3SD below the mean), which are typically all determined from historical data (Gotelli and Ellison 2004). The mean line can be constructed using data from i) historical data of an impact site prior to it being affected by hydrocarbons (i.e. what the mean used to be), or ii) control locations, whereby either historical or recent data is used for comparison to other sites (i.e. a control site historical data compared to impact site). The approach is then based on calculating the mean (ongoing) for an impact site to compare against the control chart. Any observations outside the UCL and LCL suggest that increased variation has been observed that are inconsistent with other data and may post a simple way to detect change in a system (Figure A-2).

In addition, if ongoing data collection is possible following a potential impact, the control chart approach can be used to examine the direction of change and whether this is consistent or inconsistent with other data. These data and interpretation may provide a weight of evidence of a directional change in a given parameter.

The control chart approach is only useful if there is an adequate knowledge of natural variability in a given parameter whether from historical sources or similar sites/locations. Control chart approaches can be a powerful tool for detecting impacts for systems that are naturally highly variable.

Based on template: AUS 1000 IMT TMP 14376462 Revision 3 Issued for Use 06/03/2019 LE-SystemsInfo-Information Mgt.

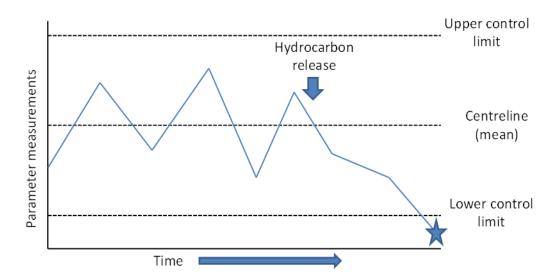

(Source: APPEA 2019)

Note: The star represents a measurement beyond the likely anticipated variation, which needs to be investigated.

Figure A-2: Example Control Chart showing Centreline (mean), Upper Control Limit (3 SD above mean), Lower Control Limit (3 SD below mean), and Measurements

A. 5. Lines of evidence approach

The lines of evidence approach is applicable in the following circumstances:

- Can be combined with any of the above monitoring designs to provide inferential evidence of an effect;
- Are useful to support evidence of effect if there are limited (or only one) impact locations;
- Are useful to support evidence of effect if the effect radiates outward from source;
- Are useful to infer cause of change if limited or no baseline data exist;
- Are useful to infer cause of change if limited or no control sites exist.

When a sampling design is suboptimal, or if conclusions from more formal tests are inconclusive, a lines of evidence approach can be used to help infer the cause of an observed change (i.e. attribute change to the hydrocarbon release or to other causes, such as natural variation). Within the lines of evidence approach, inference is developed based on carefully structured arguments. A weakness of this method is that the evidence may be largely circumstantial because it is based on correlations (Downes et al. 2002), which does not necessarily imply causation. Each causal argument may be weak when considered independently but combined they may provide strong circumstantial evidence and support for a conclusion (Downes et al. 2002).

This approach was originally developed in medicine (Hill 1965) but has been used more recently in ecological studies (e.g. Downes et al. 2002; McArdle 1996; Suter 1996; Beyers 1998; Fabricius 2004). Causal criteria have been developed for categorizing arguments from studies on disease on humans (Hill 1965), and these can be applied to ecological arguments (Hill 1965). With lines of evidence, there is a need to seek evidence not only to support the impact prediction, but evidence to rule out plausible alternative predictions, such as that the observed difference was due to natural processes (Downes et al. 2002; Beyers 1998).

In the lines of evidence approach, a set of descriptions should be developed for all or some of the causal criteria listed in Table A-1 before the survey is undertaken (see Downes et al. 2002 for further criteria and examples). Data would then be collected that allows each line of evidence to be tested or objectively questioned. The final assessment of whether an impact is likely to have occurred should be based on the 'weight of evidence' from examining multiple lines of evidence.

Example generalised lines of evidence descriptions are provided in Table A-2. These should be modified and tailored to individual scientific monitoring module, as required and each parameter investigated.

Table A-1: Causal criteria and description in the context of ecological impact Assessment

(Source: Hills 1965, in APPEA 2019)

Causal criterion	Description
Strength of association	A large proportion of individuals are affected in the impact area relative to control areas
Consistency of association	The association was observed by other investigators at other times and places
Specificity of association	The effect is diagnostic of exposure
Temporality	Exposure must precede the effect in time
Biological gradient	The risk of effect is a function of magnitude of exposure
Biological plausibility	A plausible mechanism of action links cause and effect
Experimental evidence	A valid experiment provides strong evidence of causation
Coherence	Similar stressors cause similar effects
Analogy	The causal hypothesis does not conflict with existing knowledge of natural history and biology

Table A-2: Causal criteria and example lines of evidence descriptions that could be used to assess whether a change in a measured parameter was due to the effects of a hydrocarbon release

(Source: APPEA 2019)

Causal criterion	Evidence supportive of a hydrocarbon release impact	Evidence unsupportive of a hydrocarbon release impact
Strength of association	Larger decline in individuals in areas affected by hydrocarbon than in control areas	Similar declines in individuals in areas affected by hydrocarbon and control areas
Consistency of association	Consistent finding of declines in a range of biota in areas affected by hydrocarbon	Inconsistent declines in biota in areas affected by hydrocarbon (e.g. declines in one species but not in other similar species)
Specificity of association	Number of individuals affected correlates with hydrocarbon concentrations	No correlation between number of individuals affected and hydrocarbon concentration
Temporality	Decline in individuals immediately preceded by contact with hydrocarbon	Decline in individuals occurred before or long after hydrocarbon contact

Causal criterion	Evidence supportive of a hydrocarbon release impact	Evidence unsupportive of a hydrocarbon release impact
Biological gradient	Changes in individuals aligned with exposure to hydrocarbon spills or concentrations	Decline in individuals occurs with increasing distance from a hydrocarbon spill or hydrocarbon concentrations
Biological plausibility	Evidence from literature of sensitivity to detected hydrocarbon concentration for species where declines are observed	Evidence from literature suggests lack of sensitivity to detected hydrocarbon concentration for species where declines are observed
Experimental evidence	A valid experiment provides strong evidence of causation	Not applicable (N/A)
Coherence	Evidence of a decline in species abundance, habitat, and food source with increasing hydrocarbon exposure	Evidence of a decline in species abundance, but no other evidence of expected declines associated with exposure
Analogy	Apparent declines in hatchling numbers despite no apparent decline in numbers of adults	Apparent declines in hatchling numbers associated with decreased numbers of adults

Appendix B Baseline Information

A database of known literature and studies relevant to environmental receptors within the Otway and Bass Basins that may provide suitable baseline data and/or contextual information in the event of a spill.

Source	Description	Relevant Scientific Monitoring Study
Group / Agency		
Birdlife Australia	Shorebirds 2020	S5: Marine fauna impact assessment
Parks Victoria	Signs of Healthy Parks program, including:	
	Subtidal Reef Monitoring Program	S3: Subtidal habitats impact assessment
	 Popes Eye Component of the Port Phillip Heads MNP 	
	 Reef Biota at Beware Reef Marine Sanctuary 	
	 Reef Biota at Bunurong Marine National Park and Surrounding Coast 	
	 Reef Biota at Eagle Rock Marine Sanctuary 	
	 Reef Biota at Jawbone Marine Sanctuary 	
	 Reef Biota at Marengo Reefs Marine Sanctuary 	
	 Reef Biota at Marine Protected Areas in the Twofold Shelf region 	
	 Reef Biota at Merri Marine Sanctuary 	
	 Reef Biota at Phillip Island 	
	 Reef Biota at Point Addis Marine National Park 	
	 Reef Biota at Port Phillip Bay Marine Sanctuaries 	
	 Reef Biota at Port Phillip Heads Marine National Park 	
	 Reef Biota at Ricketts Point Marine Sanctuary 	
	 Reef Biota at Wilsons Promontory Marine National Park 	
	 Reef Biota on the Western Victorian Coast 	
	 Reef Biota within the Twofold Shelf Bioregion 	
	 Reef Surveys at Twelve Apostles Marine National Park and The Arches Marine Sanctuary 	
	 The Reef Biota at Point Cooke Marine Sanctuary 	
	° Western Victorian Coast	
	Intertidal Reef Monitoring Program	S4: Intertidal and coastal habitats impac
	 Intertidal Reef Biota of Central Victoria's Marine Protected Areas 	assessment
	 Intertidal Reef Biota of Northern Port Phillip Bay Marine Sanctuaries 	
	 Reef biota in Central Victoria and Port Phillip Bay Marine Sanctuaries 	
	Shallow Water Habitat Mapping at Victorian Marine National Parks and Marine Sanctuaries	S3: Subtidal habitats impact assessment S4: Intertidal and coastal habitats impac
	 Eastern Victoria 	assessment
	o Western Victoria	

Source	Description	Relevant Scientific Monitoring Study
	Mapping the Benthos in Victoria's Marine National Parks	S3: Subtidal habitats impact assessment
	 Cape Howe Marine National Park 	S4: Intertidal and coastal habitats impac
	 Discovery Bay Marine National Park 	assessment
	 Point Addis Marine National Park 	
	 Point Hicks Marine National Park 	
	 Twelve Apostles Marine National Park 	
	Reef Life Survey	S3: Subtidal habitats impact assessment
	Community-based monitoring programs, including:	S3: Subtidal habitats impact assessment
	 Intertidal Rocky Shore Monitoring 	S4: Intertidal and coastal habitats impac
	 Seagrass Monitoring 	assessment
	 Subtidal Reef Monitoring 	
	Marine Natural Values Study, including:	S1: Water quality
	 Marine Protected Areas of the Otway Bioregion 	S2: Sediment quality
	 Marine Protected Areas of the Central Victoria Bioregion 	S3: Subtidal habitats impact assessment
	 Marine Protected Areas of the Victorian Embayments Bioregion 	S4: Intertidal and coastal habitats impacassessment
	 Marine Protected Areas of the Victorian Embayments Bioregion 	S5: Marine fauna impact assessment
	 Marine Protected Areas of the Flinders and Twofold Shelf Bioregions 	
	Other publications, including:	
	Marine Habitat Mapping Project	S3: Subtidal habitats impact assessment
	Species diversity and composition of benthic infaunal communities found in Marine National Parks along the outer Victorian coast	S4: Intertidal and coastal habitats impac assessment
	Managing Hooded Plover in Victoria	S5: Marine fauna impact assessment
	Birds as Environmental Indicators	S5: Marine fauna impact assessment
	Rocky Shores of Marine National Parks and Sanctuaries on the Surf Coast Shire – Values, uses and impacts	S4: Intertidal and coastal habitats impac assessment
	Identification of threats to natural values in Victoria's Marine National Parks and Marine Sanctuaries	S3: Subtidal habitats impact assessment S4: Intertidal and coastal habitats impact assessment
		S5: Marine fauna impact assessment
	Monitoring the macroinvertebrates and soft sediments in the Marine National Parks in Western Port	S4: Intertidal and coastal habitats impact assessment
	Mud Islands Seagrass and Coastline Mapping 2011-12	S4: Intertidal and coastal habitats impacassessment
	Yaringa and French Island MNP Habitat Mapping	S3: Subtidal habitats impact assessmen S4: Intertidal and coastal habitats impact assessment

Source	Description	Relevant Scientific Monitoring Study
Victorian National Parks Association	Reefwatch	S3: Subtidal habitats impact assessment
Journals		
Deep-Sea Research Part II: Topical Studies in Oceanography	McCauley, R. D., A. N. Gavrilov, C. D. Jolliffe, R. Ward, and P. C. Gill. (2018). Pygmy blue and Antarctic blue whale presence, distribution and population parameters in southern Australia based on passive acoustics. Deep-Sea Research Part II: Topical Studies in Oceanography 157-158: 154-168	S5: Marine fauna impact assessment
Marine Ecology Progress Series	Bruce, B. D., D. Harasti, K. Lee, C. Gallen & R. Bradford. (2019). Broadscale movements of juvenile white sharks Carcharodon carcharias in eastern Australia from acoustic and satellite telemetry. <i>Marine Ecology Progress Series</i> , 619: 1-15	S5: Marine fauna impact assessment
	Gill, P.C., M.G. Morrice, B. Page, R. Pirzl, A.H. Levings and M. Coyne (2011). Blue whale habitat selection and within-season distribution in a regional upwelling system off southern Australia. Marine Ecology Progress Series, 421: 243–263.	S5: Marine fauna impact assessment
Marine Mammal Science	Kirkwood, R., Warneke, R.M., Arnould. J.P. (2009). Recolonization of Bass Strait, Australia, by the New Zealand fur seal, Arctocephalus forsteri. Marine Mammal Science 25(2): 441 –449	S5: Marine fauna impact assessment
The Journal of Wildlife Management	Gill, P.C., R. Pirzl, M.G. Morrice & K. Lawton (2015). Cetacean diversity of the continental shelf and slope off southern Australia. The Journal of Wildlife Management.	S5: Marine fauna impact assessment
Universities		
Curtin University Centre for Marine Science	Gavrilov, A. (2012). Seismic signal transmission, pygmy blue whale abundance and passage and ambient noise measurements during and after the Bellerive seismic survey in Bass Strait, 2011, Curtin University centre for Marine Science	S5: Marine fauna impact assessment