



Stag 50H and 51H Drilling Oil Pollution Emergency Plan
GF-70-PLN-I-00009
Rev 0

FACILITY	GF - Stag Field
REVIEW INTERVAL	30 Months

Rev No	Date	Approval		
		Owner	Reviewer	Approver
		Emergency Response Lead	Drilling & Wells Manager	Country Manager
0	25-Jan-22	H. Astill	G. Hattersley	D. Lamb
		<i>H. Astill</i>	<i>G. Hattersley</i>	<i>D. Lamb</i>

Holders of Controlled Copies:

- Perth Office – Country Manager
- Stag Central Production Facility – OIM
- AMOSC
- MODU OIM
- Australian Maritime Safety Authority
- WA Department of Transport

UNCONTROLLED WHEN PRINTED

REVISION HISTORY

Revision	Date	Author / Editor	Amendment
0	11/01/2022	L. Sands / C. Holyoake	Prepared for submission to NOPSEMA

CONTENTS

KEY DOCUMENTS 8

Quick Reference Information..... 9

Part A – Regulatory 11

1. PURPOSE 11

2. OBJECTIVES 11

3. SCOPE 11

4. SPILL SCENARIOS AND CONTEXT 13

4.1.1 Marine Diesel 13

4.1.2 Stag Crude Oil 13

5. PREDICTED SPILL TRAJECTORY AREA, SENSITIVITIES AND RESPONSE PRIORITIES..... 15

5.1 The Influence of Chemical Dispersant Use on Projected Spill Trajectory Area 16

6. APPLICABILITY OF RESPONSE STRATEGIES 17

6.1 Operational NEBA 21

6.2 Response Resource Planning 21

7. RESOURCES REQUIRED FOR A WCS SPILL EVENT AT STAG 23

8. SOURCE CONTROL STRATEGY 30

8.1 Initiation and Termination Criteria 30

8.2 Tasks for Process Incident 30

8.3 Tasks for Vessel Collision 31

9. OPERATIONAL MONITORING STRATEGY 32

9.1 Common Operating Picture (COP)..... 32

9.2 Operational Monitoring Plan 32

9.3 Initiation and Termination Criteria 32

9.4 Tactics 33

9.4.1 Tracking Buoy Deployment 33

9.4.2 Vessel Surveillance 33

9.4.3 Aerial Surveillance 34

9.4.4 Oil Spill Trajectory Modelling 35

9.4.5 Satellite Imagery..... 35

9.4.6 Fluorometry 35

9.4.7 Shoreline and Coastal Habitat Assessment..... 36

9.4.8 Resource Rationale for Operational Monitoring..... 36

10. CHEMICAL DISPERSION STRATEGY 38

10.1 Initiation and Termination Criteria 38

10.2 Chemical Dispersant Action Plan 39

10.3	Dispersant Selection.....	39
10.4	Tasks for Mobilising Chemical Dispersants	39
10.5	Tasks for Aerial Application of Chemical Dispersants.....	41
10.6	Chemical Dispersant Application Area and Timing.....	41
10.7	Dispersant Effectiveness Monitoring	41
10.8	Resource Rationale for Chemical Dispersant Application.....	42
10.8.1	Calculations - Volume of oil to be treated.....	42
10.8.2	Calculations - Volume of dispersant required	42
10.8.3	Assumptions - Fixed wing aerial dispersant (Air Tractor) operations	43
10.8.4	Dispersant budget	43
11.	CONTAINMENT AND RECOVERY STRATEGY	44
11.1	Initiation and Termination Criteria	44
11.2	Tactics	44
11.3	Tasks for Containment and Recovery.....	44
11.4	Tasks for Offshore Waste Storage and Collection	45
11.5	WA DoT Requirements for Offshore Decanting of Waste Water	45
11.6	Resource Rationale for Containment and Recovery.....	46
11.6.1	Amount of oil available to recover.....	46
11.6.2	Containment of oil.....	46
11.6.3	Resources	47
12.	PROTECTION AND DEFLECTION STRATEGY.....	48
12.1	Initiation and Termination Criteria	48
12.2	Tactics	48
12.3	Priority Receptors	49
12.4	Resource Rationale for Protection and Deflection	50
13.	SHORELINE CLEAN-UP STRATEGY	51
13.1	Initiation and Termination Criteria	51
13.2	Tactics	51
13.3	Tasks	51
13.4	Resource Rationale for Shoreline Clean-Up.....	53
13.5	Priority receptor	53
13.6	Shoreline Clean-up Waste	54
13.6.1	Accessible shorelines.....	55
13.6.2	Remote Locations/Islands Waste Management	55
14.	OILED WILDLIFE RESPONSE	58
14.1	Initiation and Termination Criteria	58

14.2	Wildlife first response	58
14.3	Oiled Wildlife Response Levels and Personnel Requirements	62
15.	REVIEW OF OPEP	63
16.	CONTROLS.....	64
Part B – Response		75
17.	INITIAL INCIDENT ACTION PLANS.....	75
17.1	Level 1 Initial Incident Action Plan	75
17.2	Level 2 Initial Incident Action Plan	76
17.3	Notification and Activation.....	79
17.4	Source Control Action Plan	81
17.5	Operational Monitoring Plan	82
17.6	Surface Chemical Dispersant Action Plan	92
17.7	Containment and Recovery Action Plan	100
17.8	Protection and Deflection Action Plan	104
17.9	Shoreline Clean-up Action Plan.....	109
17.10	Oiled Wildlife Plan	117
18.	REFERENCES	129
19.	ABBREVIATIONS	131
20.	APPENDICES	133
Appendix A1 – Observer Logs		134
Appendix A2 - Bonn Agreement Oil Appearance Code.....		144
Appendix A3 – Shoreline Assessment Form.....		153
Appendix A4 – Diesel properties.....		157
Appendix A5 – Stag Crude Assay.....		158
Appendix A6 – Regulatory Notifications.....		160
Appendix A7 - Incident Management Guidance.....		163
1.	Purpose	163
2.	Scope.....	163
3.	Principles.....	163
4.	Define the spill level.....	164
5.	Interface with External Plans	165
5.1	AMOSPlan	166
5.2	National Plan	166
5.3	WA DoT & State Hazard Plan (MME).....	167
6.	Risks	169
7.	Incident Management Structure	170

7.1	Incident Response Team– Tactical Level.....	170
7.2	Incident Management Team – Operational Level	171
7.3	Group Crisis Team – Strategic Level	171
8.	Incident Management	171
8.1	IMT Activation Process.....	174
8.2	Forward Operating Base (FOB)	175
8.3	IMT and FOB External Support Arrangements	175
9.	IMT Roles and Responsibilities	177
	DUTY CARD 1: IMT LEADER.....	177
	DUTY CARD 2: OPERATIONS	180
	DUTY CARD 4: LOGISTICS.....	182
	DUTY CARD 3: PLANNING	184
10.	Incident Assessment & Orientation	190
10.1	Understand & Assess the Situation	190
10.2	Initial Briefing	190
10.3	Notifications	190
11.	Oil Spill Response Cycle.....	191
11.1	Gaining Situational Awareness	191
11.2	Assess Appropriate Strategies	191
11.3	OPEP Actions Tables.....	191
11.4	Incident Action Plan	192
11.5	Monitoring Performance of IAP	192
11.6	Net Environmental Benefit Analysis (NEBA)	193
12.	Further IMT Management Guidance	194
13.	IMT Training and Competency	194
13.1	IMT Exercise and Testing Program	196
14.	Scientific Monitoring.....	197
14.1	Objectives.....	197
14.2	Industry Guidelines	197
14.3	Monitoring Background.....	197
14.4	Revision of Monitoring Programs	197
14.5	Scientific Response Monitoring Service Providers	198

TABLE OF FIGURES

Figure 3-1:	Location of the Stag Field	12
Figure 5-1:	Location of Sensitive Receptors Used in Spill Modelling	15
Figure 10-1:	Effective and Ineffective Dispersant Application	42

TABLES OF TABLES

Table 3-1: Stag CPF and the CALM Buoy Coordinates 11

Table 3-2: Distances from Stag Facility to Key Regional Features 11

Table 4-1: Identified Scenarios for Hydrocarbon Releases to the Marine Environment 14

Table 6-1: Applicability of Oil Spill Response Strategies 18

Table 6-2: Oil Spill Response Equipment..... 22

Table 7-1: Resources Required for a WCS Spill Event at STAG 23

Table 7-2: Cumulative Personnel Requirement Across Response Activities and Source 29

Table 9-1: Resource Rationale for Shoreline Assessment Personnel 37

Table 10-1: Initiation and Termination Criteria Chemical Dispersant Tactics..... 38

Table 10-2: Chemical Dispersant Inventory as of December 2021 40

Table 10-3: Dispersant application budget 43

Table 11-1: Containment and Recovery Plan Calculation..... 46

Table 12-1: Shoreline protection resource requirements for priority receptors based on stochastic modelling 50

Table 13-1: Shoreline clean-up techniques..... 52

Table 13-2: Shoreline clean-up resource requirements for priority receptors based on stochastic modelling 54

Table 13-3: Shoreline Clean-up Selection Factors by Shoreline Type, Oil Type and Degree of Oiling 56

Table 14-1: Initiation and Termination Criteria 58

Table 14-2: Wildlife Reconnaissance Considerations (adapted from the WAOWRP) 59

Table 14-3: Oiled Wildlife Response Levels..... 62

Table 16-1: Operational Performance Standards and Measurement Criteria..... 64

KEY DOCUMENTS

Company-wide:

<p>JADESTONE ENERGY INCIDENT MANAGEMENT TEAM RESPONSE PLAN (IMTRP) JS-70-PLN-F-00008</p>	<ul style="list-style-type: none"> • Risks and Hazards • Incident Management Structure • Incident Management Process • Incident Management Team • Incident initial assessment and orientation • Information management • Stand down and debrief • Administration • Statutory requirements • Defining the spill level • Oil spill response cycle • Termination and recovery • Oiled Wildlife Response • Scientific Monitoring • Waste Management
---	--

Facility-specific:

<p>[This document]</p> <p>STAG FIELD DRILLING OIL POLLUTION EMERGENCY PLAN (OPEP) GF-70-PLN-I-00009</p>	<ul style="list-style-type: none"> • Incident Action Plan (First 48-hour operational period) • Stag Facility Drilling and oil spill risks • Sensitivities and Response Priorities • Resource Requirements • Response Strategies: • Source Control • Operational Monitoring • Chemical Dispersant • Containment and Recovery • Protection and Deflection • Shoreline Clean-up • Oiled Wildlife Response • Operational Performance Standards and Measurement Criteria • Appendices: • Observation logs • Oil on Water Classification • Diesel fuel properties • Stag Crude Assays • Spill response planning scenario assumptions • FWADC Joint Standard Operating Procedure • Shoreline Assessment Form • Regulatory Notifications • Incident Management Guidance
---	--

QUICK REFERENCE INFORMATION

In the event of an incident where human safety is at significant risk, tasks included in this OPEP may not be implemented, and the International Convention for the Safety of Life at Sea (SOLAS) 1974 may take precedence.

Parameter	Information	Further Information	
Facility Name	Stag Field Production and Export Facility (Stag Facility)	Section 3 and Section 1.1 and 2 of EP	
Location (Lat/Long and Easting Northing)	Refer to Table 3-1		
Title/s (Block/s)	Permit area WA-15-L	N/A	
Water Depth	49 m	Section 1.1 of EP	
Hydrocarbon Type/s and International Tanker Owners Pollution Federation (ITOPF) Classification	Marine Diesel Oil (MDO): Group 2 Stag Crude Oil: Group 3	Section 4	
Worst Case Spill Scenarios	Scenario	Worst case spill volume	Section 4
	<i>Level 1</i>		
	Surface release of MDO from bunker transfer	5 m ³	
	Surface release of MDO from handling and storage of hydrocarbons, equipment failure, refuelling of machinery from day tank	500 L	
	<i>Level 2</i>		
	Surface release of Stag Crude from a loss of integrity from the conductor due to MODU collision	68 m ³	
	Surface release of MDO from maintenance support vessel due to a vessel collision/ Loss of integrity	250 m ³	
	Surface release of MDO from operations support vessel due to a vessel collision/ loss of integrity	80 m ³	
Weathering Potential	Stag Crude is a moderately persistent hydrocarbon with a density slightly lower than seawater. Weathering under low (5 knots) and constant wind indicates that approximately 14% of the oil volume would evaporate within 12 hours. The remaining oil would weather at increasingly slower rate as the mixture becomes proportionally enriched by	Section 4	

Parameter	Information	Further Information
	<p>compounds with longer carbons chains, hence higher boiling points. Once all volatile compounds have evaporated, only the residual compounds will remain and weathering rates would slow significantly. After one day approximately 40 to 80% is predicted to remain on the sea surface (% dependent upon wind variability). This reduces to approximately 32 to 68% of the crude remaining on the surface after seven days.</p> <p>MDO is a mixture of volatile and persistent hydrocarbons with low viscosity. It will spread quickly and thin out to low thickness levels, thereby increasing the rate of evaporation. Up to 60% will generally evaporate over the first two days. Approximately 5% is considered “persistent hydrocarbons”, which are unlikely to evaporate and will decay over time.</p> <p>MDO has a strong tendency to entrain into the upper water column (0–10 m) (and consequently reduce evaporative loss) in the presence of moderate winds (> 10 knots) and breaking waves. MDO re-surfaces when the conditions calm. It does not form mousse.</p>	
<p>Priority Receptors</p>	<ul style="list-style-type: none"> • Dampier Archipelago; • Montebello Islands; • Lowendal Islands; • Barrow Island; and • Eighty Mile Beach. 	<p>Section 0</p>

PART A – REGULATORY

1. PURPOSE

The purpose of this Oil Pollution Emergency Plan (OPEP) is to detail Jadestone Energy’s oil pollution preparedness and response arrangements for the Stag 50H and 51H Drilling Environment Plan (GF-70-PLN-I-00008) (the Stag Drilling EP).

2. OBJECTIVES

The objectives of this OPEP in relation to the unplanned release of hydrocarbons arising from Stag Drilling activities are:

- To safely limit the adverse environmental effects to the marine environment;
- To define the capability requirements for response activities;
- To demonstrate arrangements for sufficient capability to respond in a timely manner and for the duration of the oil pollution incident; and
- To provide guidance to the IMT in relation to spill response implementation.

3. SCOPE

This OPEP applies to oil spill risks associated with drilling activities at the Stag Field described in Sections 7.5 and 7.6 of the Stag Drilling EP. The location of the Stag Field is provided in Figure 3-1.

The Stag Field is located approximately 32 km northwest of the Dampier Archipelago and 82 km northeast from Varanus Island, in approximately 49 m water depth. Latitude and Longitude of Stag Central Processing Facility (CPF) are provided in Table 3-1.

Table 3-1: Stag CPF and the CALM Buoy Coordinates

Facility	Latitude	Longitude
Stag CPF	20° 17.413’ South	116° 16.517’ East

Section 4 of the Stag Drilling EP (GF-70-PLN-I-00008) includes a comprehensive description of the existing environment in the Operational Area and the potential spill trajectory area (as predicted by spill fate modelling). A list of the nearest regional features is provided in Table 3-2.

Table 3-2: Distances from Stag Facility to Key Regional Features

Regional Feature	Distance from Stag CPF
Dampier Archipelago	32 km (17.3 Nm)
Closest Montebello Island	75 km (40.5 Nm)
Varanus Island	82 km (44.3 Nm)
Barrow Island	96 km (51.8 Nm)

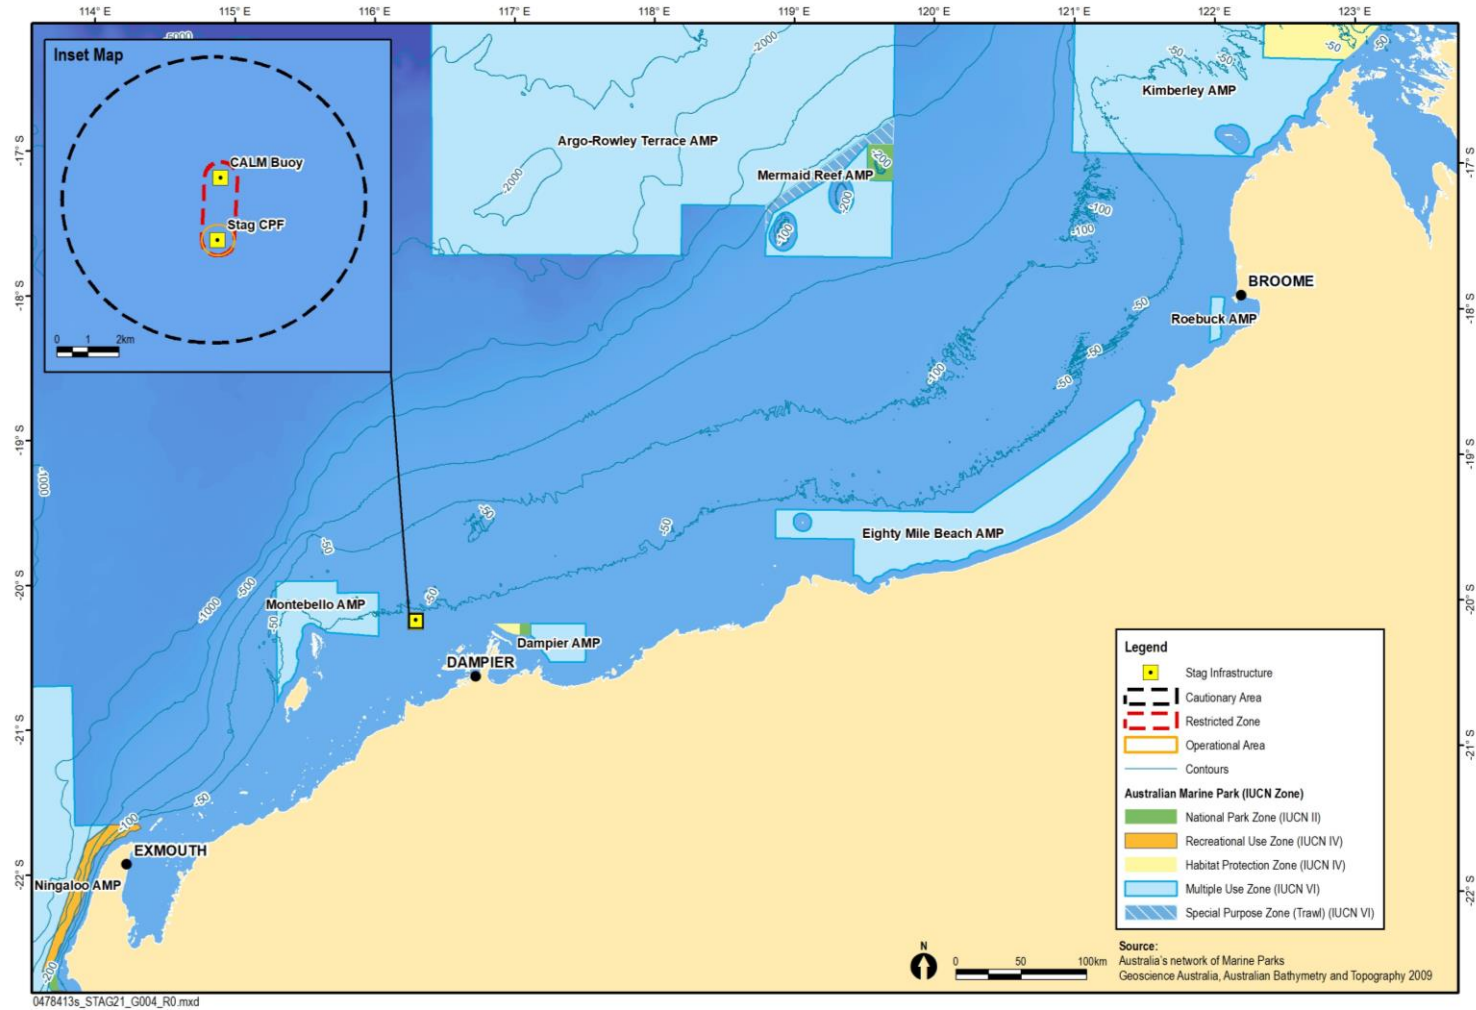


Figure 3-1: Location of the Stag Field

4. SPILL SCENARIOS AND CONTEXT

An environment risk assessment (ERA) was undertaken as part of the Stag Drilling EP. Workshops were conducted that identified possible hazards with the potential for routine or non-routine (unplanned) loss of hydrocarbons to the marine environment. Each of these hazards has been assessed with selected control measures to reduce the likelihood of hydrocarbon losses to the marine environment to ALARP. Refer to Sections 7.5 and 7.6 of the Stag Drilling EP which contain a summary of all the spill scenarios identified and assessed.

This OPEP has been prepared for the spill scenarios as summarised in Table 4-1 with a focus on the Level 2 scenario. The scenarios modelled represent most likely and worst case scenarios as defined by the National Plan for Maritime Emergencies (AMSA, 2020), however Jadestone understands that other scenarios are possible, such as a Level 1 spill, and as such Jadestone has made provisions in spill response to guide decision makers for all types of hydrocarbon spillages, at any Level.

During the Stag drilling activities, the following hydrocarbons may be unintentionally released to the marine environment: oily water, marine diesel, hydraulic oils and lubricating fluids, or crude oil. The following sub-sections describe the spill modelling parameters.

4.1.1 Marine Diesel

In the marine environment, marine diesel will behave as follows:

- Will spread rapidly to low thickness levels in the direction of the prevailing wind and waves;
- Evaporation is the dominant process contributing to the fate of spilled diesel from the sea surface and will account for 60 to 80% reduction of the net hydrocarbon balance within 48 to 72 hours;
- The evaporation rate of diesel will increase in warmer air and sea temperatures such as those present around the Stag platform; and
- Due to the low specific gravity of marine diesel, it does not sink and accumulate on the seafloor as pooled or free oil unless adsorption occurs with sediment. However, it is possible for the diesel oil that is dispersed by wave action to form droplets that are small enough to be kept in suspension and moved by the currents.

ITOPF (2018) categorises diesel as a light group II hydrocarbon. In the marine environment, a 5% residual of the total quantity of diesel spilt will remain after the volatilisation and solubilisation processes associated with weathering. For details on the properties of marine diesel, refer to Appendix A4. Refer to Section 7.6 of the Stag Drilling EP for a further description of marine diesel properties, modelling and impact.

4.1.2 Stag Crude Oil

Stag oil is a medium crude composed of hydrocarbons that have a wide range of boiling points and volatiles at atmospheric temperatures, and which will begin to evaporate at different rates on exposure to the atmosphere. Change in the mass balance calculated for Stag crude weathering under low (5 knots) and constant wind indicates that approximately 14% of the oil volume would evaporate within 12 hours. The remaining oil would weather at increasingly slower rate as the mixture becomes proportionally enriched by compounds with longer carbons chains, hence higher boiling points. Once all volatile compounds have evaporated, only the residual compounds will remain, and weathering rates would slow significantly. After one day approximately 40 to 80% is predicted to remain on the sea surface (% dependent upon wind variability). This reduces to approximately 32 to 68% of the crude remaining on the surface after seven days.

Further detail on Stag Crude oil is provided in Appendix A5.

Table 4-1: Identified Scenarios for Hydrocarbon Releases to the Marine Environment

Scenario Level; Spillage Type and National Plan Defined Level	Scenario No.	Hydrocarbon Type	Source / Cause	Total Potential Volume
Level 1 / Most Likely Spill (MLS)				
An incident which will not have an adverse effect on the public or the environment which can be controlled using resources normally available at the facility or vessel concerned without the need to mobilise the Jadestone Incident Management Team or other external assistance.	N/A	Diesel fuel	Release of diesel fuel from bunker transfer	5 m ³
	N/A	Diesel fuel	Surface release of MDO from handling and storage of hydrocarbons, equipment failure, refuelling of machinery from day tank	500 L
Level 2 / Most Likely Spill (MLS)				
	1 ¹	Stag Crude	Surface release of Stag Crude from a loss of integrity from the conductor due to MODU collision	68 m ³
	2	Diesel fuel	Vessel collision/ Loss of integrity: <u>surface release</u> of MDO from maintenance support vessel	250 m ³
	3	Diesel fuel	Surface release of MDO from operations support vessel due to a vessel collision/ loss of integrity	80 m ³

¹ As described in Section 7.5.3.2 of the EP, modelling of a larger volume of Stag Crude (86.5 m³) was undertaken in 2020, and those modelling results have been used to identify the potential worst-case area of impact in the event of this scenario (68 m³). Therefore, resourcing calculations to implement the response strategies in this OPEP have been based on the more conservative figure of 86.5 m³.

5. PREDICTED SPILL TRAJECTORY AREA, SENSITIVITIES AND RESPONSE PRIORITIES

- Results from hydrocarbon spill modelling were compared against the location of key sensitive receptors with high conservation valued habitat or species or important socio-economic/heritage value within the Environment that May Be Affected (EMBA). Section 5.6.5 of the Stag Drilling EP outlines the criteria for selecting protection priorities.

The five shoreline locations that were identified as priority protection areas based on modelling thresholds described in the Stag Drilling EP, as shown in Figure 5-1 are:

- Dampier Archipelago;
- Montebello Islands;
- Lowendal Islands;
- Barrow Island; and
- Eighty Mile Beach.

The response strategies identified in this OPEP will be adopted in the IAP process as required to protect the environmental values of this area.

Refer to the Stag Drilling EP for protection priorities and spill modelling summary including impact descriptions of sensitive locations from surface oil, entrained oil and dissolved aromatic threshold concentrations. Section 4 of the Stag Drilling EP describes the existing environment at the operational area and within the potential spill trajectory area, and identifies the protected areas and fauna that may be impacted by a spill.

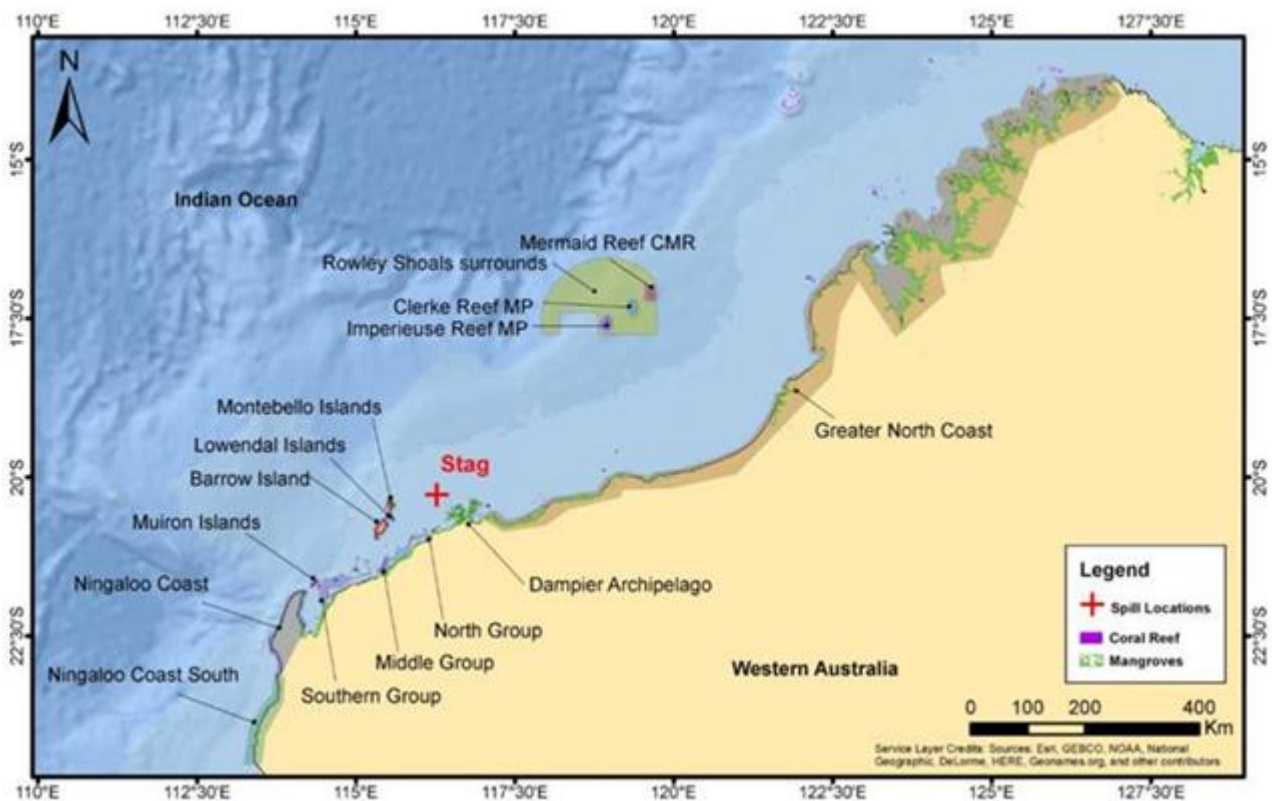


Figure 5-1: Location of Sensitive Receptors Used in Spill Modelling

5.1 The Influence of Chemical Dispersant Use on Projected Spill Trajectory Area

APASA was commissioned by Quadrant Energy to prepare a report, the Net Environmental Benefit Analysis for the Use of Dispersants (APASA, 2012), to assess whether the application of chemical dispersants reduced the probability of contact to shorelines. Key findings of this report at the time included a reduction in the predicted probabilities for shoreline accumulation exceeding the 100 g/m² threshold, and greater prediction times to sensitive locations following the application of chemical dispersant, particularly effective during the summer months.

Jadestone commissioned APASA to reanalyse the 2012 study (APASA, 2017) to further assess the effects of hydrocarbon dispersant application for the WCS spill scenario. Mass balance distribution results show that the application of the proposed dispersant treatment is predicted to reduce the proportion of released oil that would remain floating on the surface. Therefore, the proportion of oil predicted to be entrained in the water column slightly increases with dispersant application, while the proportion of oil that evaporates is slightly reduced. For the modelling replicate with maximum oil accumulation on shorelines a reduction of the proportion of oil ashore is predicted in some locations.

6. APPLICABILITY OF RESPONSE STRATEGIES

The response strategies outlined in this OPEP have been developed by Jadestone utilising risk assessments to identify credible worstcase spill scenarios, expected/calculated release rates, known information of hydrocarbon types and behaviour, and expected partitioning of the hydrocarbon within the marine environment with an estimate of the volume of persistent oil.

This information has been modelled to give a theoretical zone of spread that is used to identify potential sensitive receptors and response strategies required to reduce the consequences of a spill to ALARP. The response strategies are assessed using a NEBA process so the most effective response strategies with the lowest environmental consequences can be identified, documented and prepared for.

Table 7-6 in the Stag Drilling EP describes the decision to adopt or not a spill response strategy, and the potential environmental benefit of that strategy for Stag crude. An ALARP discussion regarding each oil spill response strategy is provided in the Stag Drilling EP.

Table 6-1 shows the operational considerations for response strategies and applicability to the two potential oil types that could be spilled, and operational considerations for incident action plans (IAPs).

The response strategies described in Sections 8 to 140 contain both a description of the response strategy and decision-making criteria; and guidance for implementation of the response strategy.

Action Plans and mobilisation of resources to respond to the spill is presented in Part B of this OPEP.

Appendix A7 (Incident Management Guidance) of this document provides a summary of Jadestone Energy's Incident Management Team and guidance on the incident response and management. The response and management is fully detailed in Jadestone's Incident Management Team Response Plan (JS-70-PLN-F-00008).

Table 6-1: Applicability of Oil Spill Response Strategies

OSR strategy	Scenario		Operational Considerations
	1 (Surface release Stag Crude)	2-3 (Surface release MDO)	
Source Control	Primary response strategy	N/A	<p><u>Loss of integrity from the conductor due to MODU collision – Scenario 1</u></p> <p>Emergency Shutdown Devices will be activated to isolate and control the source of the spill. The Stag Incident Response Plan (GF-00_PR-F-00041) will be activated.</p> <p><u>Vessel collision</u></p> <p>In the event of a vessel spill, the Vessel Master would revert to the Ship Oil Pollution Emergency Plan (SOPEP), which is a MARPOL requirement for applicable vessels.</p> <p>The SOPEP may include guidance for securing cargo via transfer to another storage area on-board the vessel, transfer to another vessel, or through pumping in water to affected tank to create a water cushion (tank water bottom). Trimming the vessel may also be used to avoid further damage to intact tanks.</p>
Operational Monitoring	Primary response strategy	Primary response strategy	<p>Surveillance actions are used to monitor and evaluate the dispersion of the released hydrocarbon, and to identify and report on any potential impacts to flora and fauna that may occur while the spill disperses. This strategy has several tactics (e.g. tracking buoys, aerial surveillance, shoreline assessment) and is scalable according to the nature and scale of a spill.</p> <p>There are clear benefits in maintaining situational awareness throughout the duration of a spill event and little or no environmental impact associated with its implementation.</p> <p>Operational monitoring results can also be used to assist in escalating or de-escalating response strategies as required.</p>
Chemical Dispersion (Surface)	Secondary response strategy	Not recommended	<p>Stag Crude: Modelling results (RPS, 2020) indicate the largest extent of floating oil >10 g/m² for the worst-case scenario (scenario 1) was 36 km from the spill source. Surface chemical dispersants are most effective on hydrocarbons that are at a thickness of 50-100 g/m² on the sea surface. Thin layers of spilled hydrocarbons should not be treated with dispersant (EMSA, 2010) as spraying thin sheens can result in an overdose of dispersant.</p> <p>Therefore, the actionable oil area likely to reach the desired thickness of 50-100 g/m² for effective surface dispersant application will be localised to the spill location. Operational monitoring would be required to help determine if the desired thickness close to the spill location may be achieved. This</p>

OSR strategy	Scenario		Operational Considerations
	1 (Surface release Stag Crude)	2-3 (Surface release MDO)	
			<p>information would be required to help inform the Operational NEBA which would determine if surface chemical dispersant application would result in a net environmental benefit (Section 17.6).</p> <p>Semi-Quantitative Effectiveness Test (SQT) results for Stag crude, referenced to the analysis of the crude in its present state from reservoir (Stag crude is significantly degraded from reservoir), indicate that chemical dispersants would be best applied (Window of Opportunity) within the first 72 hours (three days) of a spill before the crude becomes too weathered for effective application. The SQT method applied to the Stag crude has shown an average 40% effectiveness of the three types of chemical dispersant available through AMSA and AMOSC on the NWS with the maximum effectiveness of 60%.</p> <p>MDO: is not considered a persistent hydrocarbon and has high natural dispersion rates in the marine environment. Chemical dispersant application is not recommended as a beneficial option for MDO as it has a low probability of increasing the dispersal rate of the spill while introducing more chemicals to the marine environment.</p>
Containment and Recovery	Primary response strategy	Not recommended	<p>Stag Crude: Applicable for Stag Crude as it is a more persistent hydrocarbon and has a relatively slow rate of weathering. The drawbacks of this strategy include production of significant volumes of waste due to the collection of water with floating oil, however this can be mitigated to some extent if decanting is permitted.</p> <p>If metocean conditions are favourable, this strategy would result in the removal of floating hydrocarbons from the environment.</p> <p>MDO: Given the fast-spreading nature of MDO, and the expected moderate to high sea states of the area causing the slick to break up and disperse, this response is not considered to be effective in reducing the net environmental impacts of an MDO spill. The ability to contain and recover spreading MDO on the ocean water surface is extremely limited due the very low viscosity of the fuel and the inability to corral the hydrocarbon to a sufficient thickness for skimmers to be effective at removal.</p>
Nearshore and Shoreline Protection and Deflection	Secondary response strategy	Not recommended	<p>Stag Crude: Will be considered if a spill is predicted to contact sensitive shorelines and resources can be deployed effectively, safely and would not result in more harm than if the product was left to degrade naturally.</p> <p>Given tidal influences, lack of access, lack of anchoring points and subsequent distance for effective placement, this strategy would be unsuitable in many locations. This is not considered to be a primary</p>

OSR strategy	Scenario		Operational Considerations
	1 (Surface release Stag Crude)	2-3 (Surface release MDO)	
			<p>response strategy.</p> <p>If selected, preparations for this strategy should be made as soon as predictions indicate a possible shoreline impact. Department of Transport (DoT) Incident Controller (IC) (as Control Agency) approval is required before commencing protect and deflect activities in State waters.</p> <p>MDO: Modelling indicates no shoreline accumulation above moderate shoreline accumulation thresholds (>100 g/m²).</p>
Shoreline Clean-up	Secondary response strategy	Not recommended	<p>Stag Crude: Intrusive response that requires careful site-specific planning in order to reduce secondary impacts of physical disturbance and secondary contamination to intertidal and shoreline habitats. Flushing may be considered if the oil enters high priority/slow recovery habitats such as mangroves. Natural dispersion will occur as the hydrocarbon is remobilised from rock shelves and hard substrates, while residual oil will biodegrade.</p> <p>Due to these disturbances, this response has potential to cause more harm than light oiling, so must be carefully considered under a shoreline assessment and NEBA.</p> <p>If selected, preparations for this strategy should be made as soon as predictions indicate a possible shoreline impact. DoT IC (as Control Agency) approval is required before commencing clean-up activities in State waters.</p> <p>MDO: Modelling indicates no shoreline accumulation above moderate shoreline accumulation thresholds (>100 g/m²).</p>
Oiled Wildlife Response	Primary response strategy	Primary response strategy	<p>Stag Crude and MDO: Applicable for marine animals that come close to the spill when on the water and shorelines.</p> <p>Targeted wildlife surveillance/reconnaissance with planning taking into consideration the time of year and key biological activities such as breeding, mating, nesting, hatching or migrating.</p>
Scientific Monitoring (See IMTRP Appendix A)	Primary response strategy	Primary response strategy	<p>Stag Crude and MDO: Applicable for marine environment contacted by hydrocarbons either by floating, dissolved or entrained.</p>

6.1 Operational NEBA

Following implementation of the initial (first strike) response, the information in Table 6-1 will aid in the development of the initial Operational NEBA. The Action Plan tables in Section 17 include considerations to help complete the Operational NEBA.

It should be noted that the initial Operational NEBA may be based on limited information; however, the overall response effort should not be delayed due to a lack of some information. The Operational NEBA can always be revised when more information is provided to the Planning Lead.

The Planning Lead is responsible for completing the Operational NEBA and to determine if outputs from the Strategic NEBA are still appropriate. The Operational NEBA should incorporate post-spill trajectory modelling data, surveillance data, operational monitoring data and should be incorporated into the IAP.

6.2 Response Resource Planning

Spill response planning to identify a suitable combination of response strategies involves estimating required resources and an assessment of the capability required to support the response. Capability to support the minimum resources required has been planned for and is presented in Table 7-1.

Some spill scenarios are predicted to contact shorelines. The remoteness and nature of the shorelines contacted places a priority on offshore response strategies that reduce the volume of oil to shore. The primary response strategies will be:

- Source Control will reduce the length of time the oil is released into the marine environment;
- Operational monitoring is the first response strategy implemented to enable Jadestone to gain and maintain situational awareness;
- Surface chemical dispersant application implemented because of the predicted benefit demonstrated through efficacy testing;
- Containment and recovery operations complement the dispersant strategy by being able to target areas of floating oil that have not dispersed; and
- Oiled Wildlife Response including rapidly initiating wildlife surveillance/ reconnaissance to ascertain the type of wildlife impacted and the level of impact in order to assist with the development of appropriate response strategies.

The mix of resources presented in Table 7-1 provides a basis from which complementary response strategies can be undertaken for protection priorities with a reasonable prospect for positive outcomes.

Spill response planning assumptions take into consideration:

- The weathering properties of Stag Crude are well understood however this does not negate the influence of real time variables on the rate of evaporation and emulsification.
- Approximately 32 to 68% of the volume of Stag oil spilled is expected to evaporate over the first seven days (% dependent upon wind variability).

An overview of the equipment and dispersant available to Jadestone from national stocks is provided in Table 6-2.

Table 6-2: Oil Spill Response Equipment

Agency	Stockpile Locations	Equipment
Jadestone	<ul style="list-style-type: none"> • Supply vessel 	Computerised Management Maintenance System (CMMS) provides up-to-date equipment lists for the various stockpile locations
AMOSC	<ul style="list-style-type: none"> • Broome • Exmouth • Fremantle • Geelong • Industry Mutual Aid register 	AMOSC equipment and dispersant lists are available via the Member Login webpage: <ul style="list-style-type: none"> • AMOSC website: https://amosc.com.au/member-login/ AMOSC can arrange for transport of their equipment and dispersant to Dampier Forward Operating Base (FOB).
AMSA	<ul style="list-style-type: none"> • ACT • Adelaide • Brisbane • Dampier • Darwin • Devonport • Fremantle • Gladstone • Horn Island • Karratha • Melbourne • Sydney • Townsville 	AMSA equipment and dispersant lists are available on the AMSA website via the following links: <ul style="list-style-type: none"> • Equipment: https://amsa-forms.nogginoca.com/public/equipment.html?loc=%2Fapi%2Fv1%2Fasset%2F2616201 • Dispersant: https://amsa-forms.nogginoca.com/public/dispersant.html?loc=%2Fapi%2Fv1%2Fasset%2F2544502 • Fixed Wing Aircraft: https://amsa-forms.nogginoca.com/public/aircraft-availability.html
Waste Management Contractor	<ul style="list-style-type: none"> • Darwin • Broome • Port Hedland • Karratha • Perth 	Waste management contractor’s waste management equipment are summarised in its Waste Management Plan.

7. RESOURCES REQUIRED FOR A WCS SPILL EVENT AT STAG

Table 7-1: Resources Required for a WCS Spill Event at STAG

Response tactic	Capability details	Capability required within 48 hrs	Additional capability required within 7 days	Additional capability required within 14 days	Total required	Providers and quantities	Arrangement
Operational monitoring							
Satellite tracking	Satellite tracking buoy	2 buoys	None	None	2 buoys	Satellite buoy provider	Contract with satellite tracking buoy services provider
Modelling	OSTM	2 trajectory and weathering models	7 trajectory and weather models	None	9 model outputs	RPS APASA	AMOSC MSC
Aerial surveillance	Aircraft	1 aircraft	2 aircraft	None	2 aircraft	Jadestone aviation contract	Contract with aviation services provider
	Aerial observers	1 observer	2 observers	None	2 observers	AMOSC Core group	AMOSPlan
Vessel surveillance	Vessel of opportunity or contracted	1 vessel	None	None	1 vessel	Jadestone marine contracts	MSAs with vessel providers subject to availability
	1 observer	1 observer	None	None	1 observer	Vessel of opportunity	Master of vessel
Fluorometry	Towable fluorometers	2 fluorometers	None	None	2 fluorometers	Jacobs Environmental or CSIRO	Scientific Monitoring Plan PO and CSIRO via AMSA MOU

Response tactic	Capability details	Capability required within 48 hrs	Additional capability required within 7 days	Additional capability required within 14 days	Total required	Providers and quantities	Arrangement
Shoreline and coastal habitat assessment	Trained team leaders and team members trained on site (3 members per team)	1 team leader, 2 team members (total 3 people)	As determined by OSTM	As determined by OSTM	15 people (5 team leaders, 10 team members)	DoT, AMOSC and AMSA trained shoreline assessment team leaders. Labour hire contract	AMOSPlan, DoT State Response Team, AMSA MOU Contract with Labour hire services provider
	Short range UAVs with cameras/video	2 UAVs	2 UAVs	None	4 UAVs	Approach service providers at the time when required	Readily sourced and mobilised
Chemical dispersant application							
Aerial application	FWADC and pilots	1 spray aircraft 1 pilot	None	None	Rollout plan timing indicates that an aircraft can be on-site at Karratha within 18 hrs. Additional aircraft (x3) can be onsite by 48 hrs	FWADC contractor	AMSA , AMOSC contract
	Dispersant (at Karratha airport)	3.8 m ³	1.6 m ³	None	5.4 m ³	AMSA 10 m ³ Dampier Refer to Table 10-3 for dispersant budget	AMSA MOU AMOSC membership
	Air attack supervisor (AAS)	1 aircraft 1 AAS	None	None	1 air attack surveillance aircraft 1 AAS	FWADC contractor	AMSA, AMOSC membership

Response tactic	Capability details	Capability required within 48 hrs	Additional capability required within 7 days	Additional capability required within 14 days	Total required	Providers and quantities	Arrangement
	Search and rescue	1 aircraft and pilot	None	None	1 aircraft and pilot	Jadestone aircraft contracts	Contract with aviation services provider
Containment and recovery							
Booms	Offshore system	1 system	1 system	None	2 systems	AMOSC AMSA OSRL Vessel Broker	AMSA MOU AMOSC membership OSRL membership Contracts MSA Call off contracts Jadestone marine broker
Personnel	Trained oil spill responders	2 x trained responders Vessel crew	2 x trained responders Vessel crew	None	4 x trained responders Vessel crew	AMOSC core group AMSA NRT	AMSA MOU AMOSC membership
Protection and deflection							
Booms	Nearshore and land sea booms	Shoreline protection boom Intertidal protection boom and ancillaries	Shoreline protection boom Intertidal protection boom Solid flotation boom Shoreline and intertidal boom ancillaries	None	Shoreline protection boom Intertidal protection boom Solid flotation boom Shoreline and intertidal boom ancillaries	AMOSC AMSA	AMSA MOU AMOSC membership

Response tactic	Capability details	Capability required within 48 hrs	Additional capability required within 7 days	Additional capability required within 14 days	Total required	Providers and quantities	Arrangement
Nearshore skimmers	Skimmers capable of operating in nearshore marine environment.	1 skimmer	2 skimmers	1 skimmer	4-5 skimmers	AMOSC AMSA	AMSA MOU AMOSC membership
Vessels	Small support craft	1 vessel	2 vessels	None	4-5 vessels	Jadestone marine contracts	MSAs with vessel providers subject to availability
Personnel	Trained oil spill responders	2 trained responders 5 labour hire and/or AMOSC mutual aid personnel	2 trained responders 5 labour hire and/or AMOSC mutual aid personnel	2 trained responders 5 labour hire and/or AMOSC mutual aid personnel	6-10 trained responders 15-25 labour hire and/or AMOSC mutual aid personnel	AMOSC core group AMSA NRT	AMSA MOU AMOSC membership
Shoreline clean-up							
Personnel	Trained shoreline team leaders and team members/labourers trained on site. Mobilise to site ready for deployment at first site from day 2.	2 Teams (2 Trained shoreline team leaders and 18 team members/labourers trained on site)	2 Teams (2 Trained shoreline team leaders and 18 team members/labourers trained on site)	As determined by OSTM	7 teams (7 trained shoreline team leaders and 63 team members/labourers trained on site)	Labour hire contract Global Spill Control AMOSC core group DoT AMSA	Contract with labour Hire providers Global Spill Control AMOSC membership AMSA MOU
Waste	Bins, containers, bags Mobilise to site ready for deployment at first site from day 2.	15 x 3 m ³ Waste skips 15 x IBCs	As determined by OSTM	As determined by OSTM	15 x 3 m ³ Waste skips 15 x IBCs	Waste contractor	Contract with waste contractor

Response tactic	Capability details	Capability required within 48 hrs	Additional capability required within 7 days	Additional capability required within 14 days	Total required	Providers and quantities	Arrangement
Shoreline clean up equipment	Kits		Shoreline Clean-up Kits (Decontamination, Beach Wash Down, Initial IAP Support and Beach Clean-up Kits) Rope Skimmer and Collection Trailer 4 x Fast tanks Oil Vacuum Collection	Shoreline Clean-up Kits (Decontamination, Beach Wash Down, Initial IAP Support and Beach Clean-up Kits)		AMOSC AMSA	AMSA MOU AMOSC membership
Oiled Wildlife Response							
Oiled wildlife response	Refer to Section 14						AMSA MOU AMOSC membership DBCA and DBCA network
Scientific Monitoring							
Vessels	Suitable vessels for on-water monitoring & transfer of personnel to islands/ remote areas	Environmental service provider on-site in 48-72 hours	4 vessels	Dependent on the extent of the area impacted, the number of SMPs activated, and the monitoring sites determined.		Jadestone marine contracts	MAs with vessel providers subject to availability
Personnel	Environmental service provider		24 personnel (Assuming all SMPs activated)			Jacobs Environmental	Scientific Monitoring Plan PO and CSIRO via AMSA MOU

Response tactic	Capability details	Capability required within 48 hrs	Additional capability required within 7 days	Additional capability required within 14 days	Total required	Providers and quantities	Arrangement
Aerial survey			Aircraft and pilot			Jadestone aviation contract	Contract with aviation services provider
Equipment	Scientific monitoring equipment as detailed in the relevant SMPs						

Personnel required to support the IMT functions and response strategies are grouped according to source and skill base.

- Jadestone group are sourced directly from within Jadestone.
- AMOSC and AMOSC Core Group members are specifically trained in oil spill response and are identified as those who fulfil team leader roles and who can train team members if required.
- National Response team (NRT) include trained personnel from AMSA and State/Territory response teams.
- Mutual Aid / contractors / service providers group is made up of industry members, i.e. staff of other Titleholders; contract personnel; or service providers who can fulfil team member roles and don't necessarily have oil spill response training, for example labour hire.

Table 7-2 provides a summary of the cumulative personnel resource requirement across the sources. In preparing for this capability, and as a conservative measure, Jadestone has assumed that all priority receptors (Section 0) would be impacted. It should however be noted that a single spill will not contact all priority receptors and the probability of shoreline accumulation above 100 g/m² is less than five percent for all worst-case scenarios. Additionally, to cover shift arrangements to manage responder fatigue, it is assumed the number of personnel required would be approximately 50% greater. It is estimated an additional 130 response personnel (including those required for oiled wildlife response) will be required for to allow for shift changes across the response.

Table 7-2: Cumulative Personnel Requirement Across Response Activities and Source

Function	TOTAL Personnel required – team members or labour hire	Jadestone	AMOSC Staff and AMOSC Core Group	Mutual Aid /NRT/ Contractors/Service providers
IMT functions	29	21 (3 x 7)	8 (2 x 4)	-
WA DoT IMT (IGN)	11	3	8	-
Monitor and evaluate	18	-	8	10
Chemical dispersant operations	3	-	3	-
Containment and recovery	10	-	2	8
Protection and deflection	35	-	10	25
Shoreline clean-up	70	-	7	63
Oiled wildlife	59	Sourced as per the requirements set out in the Western Australian Oiled Wildlife Plan (WAOWRP) for a Level 3 response		
Scientific monitoring	24 ²	-	-	24
TOTAL personnel required and source	259	24	46	130
Response need including + 50% for shift change	389	36	69	195

² Personnel required for first-strike scientific monitoring within the first 7 days of a spill.

8. SOURCE CONTROL STRATEGY

The initial and highest priority response to an oil spill incident is to prevent or limit further oil loss into the marine environment, if safe to do so. In most circumstances, the net benefit of source control outweighs impacts of further oil being released into the marine environment. However, further risks may arise due to increased vessels and rigs and the associated increased health and safety risks for the team involved in the response.

8.1 Initiation and Termination Criteria

Tactics	Initiation criteria	Termination criteria
Emergency shutdown	Notification of spill	Release of oil ceased.
Implementation of SOPEP		Spilled oil that has been contained is cleaned up and disposed of.

The IMT will gather surveillance information from those involved in preventing further release of hydrocarbons to the marine environment and ensure that the appropriate source control actions are being undertaken.

8.2 Tasks for Process Incident

In the event of an incident such as damage to the conductors or a bunkering incident, relevant operations will cease as per the Stag Incident Response Plan (GF-00_PR-F-00041).

The spilt hydrocarbons contained onboard the third-party tanker or support vessels will be controlled and cleaned up in accordance with each vessels Shipboard Oil Pollution Emergency Plan (SOPEP), which is compliant with MARPOL 73/78 Annex 1- Prevention of Pollution by Oil under the Protection of the Sea (Prevention of Pollution from Ships) Act 1983. The mitigation measures within each SOPEP include:

- Pumping operations ceased immediately following the spill;
- Valve/s closed;
- System receiving product is immediately shut down following a spill;
- Drainage network is closed as soon as practicable following the spill to prevent discharge/ spillage to the ocean;
- Make necessary repairs to pipe to prevent further leakage;
- Use spill kit to clean-up spills on platform and/or vessel; and
- Store any clean up waste in bunded area for onshore disposal.

Collected fluids are processed and treated to meet the OIW content specification of <30 mg/l prior to discharge. Areas used for the permanent or temporary storage of bulk fuels and/ or chemicals are either fully bunded by sealing deck drains or secondary containment is provided to prevent accidental discharges to the ocean. Bunding is also located beneath the refuelling hose connections, operational equipment, and fuel tanks on the supply vessel. Closed drains on the platform and third-party tanker will isolate a spill that falls in these areas from the marine environment.

In the event hydrocarbon is spilt onto the decks of the vessel, the relevant SOPEP will be implemented. Sorbent materials are used from spill kits onboard the vessel to mop up hydrocarbon on deck. Soiled sorbent materials are bagged and disposed to shore. Before washing down the deck after excess oil has been cleaned up, the Vessel Master will confirm that the drainage network is closed and will not discharge to the ocean.

Section 7 of the Stag Drilling EP describes the environmental risks and management for unplanned events associated with drilling activities.

8.3 Tasks for Vessel Collision

Accidental release of hydrocarbons from support vessels to the marine environment is managed by the Vessel Master in accordance with MARPOL 73/78 Annex 1 – Prevention of Pollution by Oil under the Protection of the Sea (Prevention of Pollution from Ships) Act 1983.

9. OPERATIONAL MONITORING STRATEGY

A combination of methods have been identified as appropriate to characterise the released hydrocarbon, estimate the extent of the spill, measure oil volume and concentration on or in the water and locate oil along shorelines.

Understanding the behaviour and likely trajectory of an oil spill is critical to evaluate the appropriate response strategy. In some situations, after operational monitoring activities have been employed, leaving the oil to naturally dissipate and degrade may be considered the most appropriate option if any further response is a risk to increasing the environmental impact, or presents a significant safety risk.

9.1 Common Operating Picture (COP)

The ability of the IMT to manage and coordinate response operations will be heavily reliant on being able to compile and effectively manage all the information and data provided as part of the operational monitoring strategy. To achieve this a Common Operating Picture (COP) will be utilised, consisting primarily of geographical and geospatial information.

9.2 Operational Monitoring Plan

The IMT will coordinate the operational monitoring requirements, and ensure that all monitoring activities are conducted safely and effectively.

9.3 Initiation and Termination Criteria

Tactic	Initiation Criteria	Termination Criteria
Tracking buoys	Immediately once Level 2 oil spill is confirmed	Tracking buoy no longer required to inform common operating picture.
Vessel surveillance	Immediately once Level 2 oil spill is confirmed	Vessel surveillance reports no longer required to inform common operating picture
Aerial surveillance	Immediately once Level 2 oil spill is confirmed	IAP no longer requires aerial surveillance to inform common operating picture; and Agreement has been reached with the Jurisdictional Authority relevant to the spill to terminate the response
Oil Spill Trajectory Modelling (OSTM)	Immediately once Level 2 oil spill is confirmed	Modelling no longer required to inform common operating picture; and Agreement has been reached with the Jurisdictional Authority relevant to the spill to terminate the response
Fluorometry	Dispersant application has occurred	Dispersant application no longer being undertaken; and Agreement has been reached with the Jurisdictional Authority relevant to the spill to terminate the response
Shoreline and coastal habitat assessment	Immediately once Level 2 oil spill is confirmed	When all shoreline segments have reached status of no further action be taken (NFA); and Agreement has been reached with the Jurisdictional Authority relevant to the spill to terminate the response
UAV deployment	OSTM predicts shoreline impact to inaccessible area not able to be covered by other operational monitoring tactics.	UAV surveillance no longer required to inform common operating picture.

9.4 Tactics

The following tactics are sufficient for supplying all required information to inform response decisions to reduce impacts resulting from the worst-case potential spill, from the Stag drilling activities, to ALARP:

- Vessel surveillance;
- Aerial surveillance;
- Tracking buoys;
- Satellite imagery;
- Spill fate modelling;
- Fluorometry;
- Shoreline and coastal habitat assessment using Shoreline Clean-up Assessment Technique (SCAT) surveys; and
- UAVs.

9.4.1 Tracking Buoy Deployment

Satellite tracking buoy deployment is to be initiated within one hour of spill notification and placed within or as close as is safely allowable to the plume to follow the movement of a surface spill in the marine environment.

Note: Buoys are not to be dropped from a height of greater than 10m to water surface.

Satellite tracking buoys can be deployed directly from the Platform (below 10m) or mobilised via available support vessels as directed by the OIM. There are two tracking buoys available on the Stag Facility.

The time taken to deploy the tracking buoys will depend on the location they are sourced from and transit time for the vessels to deploy or retrieve. After initial deployment additional buoys will be deployed on a regular basis as determined by the IMT to best support the building and maintenance of situational awareness.

Tracker buoys are deployed under the direction from the IMT Leader, by following the appropriate standard operating procedure (SOP). Once deployed it is essential that confirmation of a successful deployment is provided back to the IMT.

Deployed buoys will be tracked online by the IMT and spill fate modelling service provider. On completion of spill monitoring using tracking buoys, the buoys are to be retrieved by a vessel.

Normal procedure will be for the deployment of a single tracking buoy on Day 1 and the second approximately 24 hours later. On being deployed all buoys will be checked to be operational through the online website. All buoy data will be used to assist with understanding the local metocean conditions. Additional buoys will be sourced as part of the response, however if required buoys can be collected and redeployed.

9.4.2 Vessel Surveillance

Direct observations from the field support vessels or other vessels can be used to assess the location and visible extent of the spill from hydrocarbon incidents, to verify modelling predictions and trajectories, and to support other response strategies.

Note: Vessel-based surveillance is only effective if sea state conditions are calm and the spill is observable.

A decision on the suitability of the metocean conditions will be made (OIM / Vessel Master / IMT) and direction provided to available vessels. Vessel surveillance is to be instructed by the OIM (Level 1) or IMT (Level 2). Vessel surveillance observations will be used by the IMT in conjunction with all other operational monitoring information (Level 2) to confirm location and extent of the spill, which will in turn assist with the development of appropriate response strategies.

The nearest support vessel to the release location will be mobilised upon notification of incident. Vessels currently on hire to Jadestone will be initially selected for vessel surveillance duties with other vessels provided from Jadestone's contracted vessel providers.

Reporting requirements will be as follows:

- Information to be provided to the OIM (Level 1) or IMT (Level 2);
- Essential information to be reported will include:
 - Spill location (latitude & longitude);
 - Length and width of slick;
 - Visual appearance of the slick (colours, emulsification etc);
 - Associated weather conditions in vicinity of the spill (wind speed/direction, sea state, swell);
 - Any marine fauna or other activities observed; and
 - Photographic images.

All information is to be compiled into a Vessel Surveillance Log (refer Appendix A1) which will be sent to the OIM/IMT within an hour of the observations being taken.

9.4.3 Aerial Surveillance

Direct observations from aircraft can be used to assess the location, estimated volume and visible extent of the spill from hydrocarbon incidents, in order to verify modelling predictions and trajectories, and to support other response strategies.

Trained Aerial Observers will be sourced through the AMOSPlan arrangements and deployed to the response location, however, should a delay in their arrival be anticipated, a surveillance flight will be conducted utilising available aircraft crew.

A decision on the suitability of the meteorological conditions will be made by the aircraft captain, who will relay this decision to either the OIM (Level 1) or IMT (Level 2) to receive appropriate tasking. Aerial surveillance observations will be used by the IMT in conjunction with all other operational monitoring information (Level 2) to confirm location and extent of the spill, which will assist with the development of appropriate response strategies or modification to existing strategies.

Note: Specific meteorological limits will vary depending on the type of aircraft being flown.

Reporting requirements will be as follows:

- Information to be provided to the OIM (Level 1) or IMT (Level 2);
- Essential information to be reported will include:
 - Spill location (latitude & longitude);
 - Length and width of slick;
 - Visual appearance of the slick (colours, emulsification etc) using the Bonn Oil Appearance Code (refer to Appendix A2);
 - Associated weather conditions in vicinity of the spill (wind speed/direction, sea state, swell);
 - Any marine fauna or other activities observed; and

- Photographic images.

All information is to be compiled into an Aerial Surveillance Log (refer Appendix A1) which will be sent to the OIM/IMT within an hour of the aircraft returning to its operating base. Where possible, a verbal report via radio/telephone en-route providing relevant information should be considered if the aircraft has long transits from the spill location to base.

Flight schedules are to be developed in support of response operations. The frequency of flights will be sufficient to ensure the information collected during each flight (i.e. observer log and spill mapping) meets the information needs of the IMT to validate spill location, dispersion and the information needs of fate modelling.

Note: Flights will only take place during daylight under visual flight rules (VFR).

A recording of the spill extent is made by outlining the approximate two-dimensional extent of the slick(s) on a map template, including GPS coordinates of extent, the time observations were made and date noted on the map template.

The trained Aerial Observer or the IMT will make estimations of thickness based on visual sighting or the photographic images respectively. Thickness estimates are to be based on the Bonn Agreement Oil Appearance Code.

Photographic or video records taken by the Aerial Observers for each fauna sighting and the location and details of each sighting are recorded with a cross-reference to photographic imagery captured. The Aerial Surveillance Marine Fauna Sighting Record Sheet is provided in Appendix A1.

9.4.4 Oil Spill Trajectory Modelling

OSTM provides a simulated trajectory of the spill based on historic and actual metocean data. This modelling will be provided in the form of a geospatial information system (GIS) format so that it can be easily integrated into the COP.

OSTM will be provided by RPS APASA via AMOSC. The IMT will contact AMOSC and confirm request of modelling services. OSTM will start within two hours of submission of the request.

On a daily basis, RPS APASA will provide three-day forecast outputs Jade Stone. More frequent updates can be provided if weather conditions are highly variable or change suddenly. Data from aerial surveillance is to be provided to RPS APASA who are contracted to undertake modelling 24/7 to verify and adjust fate predictions of the spill and improve predictive accuracy.

9.4.5 Satellite Imagery

Satellite imagery uses Synthetic Aperture Radar (SAR) to detect oil spills by emitting a radar pulse and measuring the 'backscatter' from the earth. It is a cost effective and proficient surveillance technique, as it is not reliant on daylight, cloud cover and can survey large areas of ocean in a single satellite pass. It is a useful surveillance tactic to help quantify data received from other optical-based surveillance tactics (e.g. aerial and vessel surveillance).

Satellite imagery can be obtained through AMOSC via AMOSPlan arrangements. OSRL also provides access to this service. Satellite data is available within 24 hours, then every 6 to 24 hours thereafter depending on satellite positions.

9.4.6 Fluorometry

Fluorometry surveys are used to inform of presence of oil in water near sensitivities. Surveys will be run across the expected plume extent, as well as vertically through the water column. This allows a far greater area of coverage than discrete sampling, aiding in the detection and delineation of entrained oil.

This will allow continuous monitoring of entrained oil covering a large area and will provide near real-time three-dimensional data on the distribution of entrained oil to enable decision making within the IMT.

Similarly, other sources of monitoring data (e.g. spill fate modelling) can be used in near real-time to inform the path of the sub surface glider.

In the event that sub surface fluorometers are unavailable or cannot cover the required scale of operation, towed fluorometers towed behind vessels will be used as an alternative or complementary approach. Jadestone has engaged Jacobs Environmental as a supplier of sub surface gliders with fluorometer sensors for the monitoring of entrained oil following an oil spill. Multiple towed fluorometers are also available from CSIRO. If required, within 48 hours, 2 fluorometers could be mobilised to support monitoring of the chemical dispersant program.

9.4.7 Shoreline and Coastal Habitat Assessment

Shorelines are highly variable and some (i.e. non-rocky shores and medium- to high-energy shorelines) can be quite dynamic. To assist in determining which clean-up methods are most appropriate for those areas exposed to hydrocarbons, it is necessary to obtain information about shoreline character (topography, complexity, exposure etc.), source oil characteristics and distribution, and shoreline processes and redistribution of any oil.

Shoreline clean-up assessment technique (SCAT) surveys provide a mechanism by which to record shoreline exposure to stranded oil (see Appendix A3 for shoreline assessment forms). The outcome of SCAT surveys is to provide a rapid assessment of:

- Shoreline character;
- Distribution of coastal habitat/fauna;
- Level of oil contamination and oil characteristics (if oil present); and
- Any constraints to responding to shoreline (e.g. access and safety constraints).

The information collected through SCAT surveys is used to inform appropriate shoreline response strategies, in particular termination criteria for response actions.

A shoreline assessment comprises the following tasks:

- Assessment of shoreline character, habitats and fauna including:
 - shoreline structured biotic habitats;
 - distribution of fauna;
 - shoreline energy and processes;
 - shoreline substrate;
 - shoreline form; and
 - access/ safety constraints.
- Assessment of shoreline oiling (if present):
 - surface distribution and cover;
 - subsurface distribution;
 - oil type, thickness, concentration and physical character; and
 - sampling of oil for laboratory analysis.

9.4.8 Resource Rationale for Operational Monitoring

Aerial surveillance, tracking buoys and oil spill trajectory modelling are the primary operational monitoring tactics used to determine the extent of the spill. They are designed to provide real time observational data for the IMT and to validate response planning. Resources allocated for these tasks are sufficient to provide observations and predictions to the IMT within a reasonable timeframe. Vessel surveillance, UAVs and

fluorometry are secondary tactics which can be used to complement the information gathered through the primary tactics.

SCAT is made up of 3 members per team and are assumed to be able to cover at least 10 km per day. This distance may be more, especially if UAVs are employed to cover shorelines that have access limitations. Jadestone has used the OSTM data for shoreline accumulation to plan worst case shoreline and habitat assessment personnel requirements (Table 9-1). No priority receptors are predicted to have more than 10 km of shoreline length contacted at accumulation concentrations greater than 100 g/m².

Dampier Archipelago has the longest length of shoreline accumulation (10 km) and presents the greatest resource requirement of 3 personnel (1 team of 3 members each) and Montebello Islands presents the minimum contact time. Team leaders will be sourced from AMOSC and will be trained in shoreline assessment techniques. Team members can include personnel who have completed basic training prior to mobilisation.

It should be noted that a single spill will not contact all shorelines listed in Table 9-1. In preparing for this capability, Jadestone will be able to meet lesser shoreline assessment requirements for other locations.

Table 9-1: Resource Rationale for Shoreline Assessment Personnel

Receptor	Minimum time to shoreline oil at >100 g/m ² (days)	Oiled shoreline at concentrations >100 g/m ² in worst replicate simulation (km)	Number of SCAT teams required ³
Dampier Archipelago	7	10	1
Montebello Islands	1.4 ⁴	8	1
Lowendal Islands	26	4	1
Barrow Island	26	2	1
Eighty Mile Beach	14	4	1

³ SCAT numbers are not cumulative as spill will not contact all receptors modelled. Number required would be based on direction of spill and timeframes to contact.

⁴ All results presented in this table are from Scenario 1 (release of 86.5 m³) for the period September to February, with the exception of Montebello and Lowendal Islands which are the same scenario but the period of March to August.

10. CHEMICAL DISPERSION STRATEGY

Dispersants are chemicals sprayed onto oil spills from aircraft or vessels to accelerate the process of natural dispersion. They are designed to separate the oil particles on surface waters and help dispersion in the water column (as small droplets) to speed up the process of natural biodegradation. Chemical dispersants can be used to:

- Decrease floating oil;
- Reduce the impact to shorelines; and
- Reduce the quantity of waste created.

Jadestone will apply chemical dispersants to Stag Crude as soon as practically possible to maximise the application rate over 72 hours from release to be within the Window of Opportunity. Due to the variability in effectiveness, Jadestone will monitor the effectiveness to assess whether to continue application through the NEBA process.

Chemical dispersants can decrease the risk of oil impact to shorelines but can increase the risk to pelagic wildlife through entrained oil. NEBA will be used to assist in assessing the exchange of one risk to another. The Planning Team will be required to complete the Risk Assessment step in the IAP process and consider:

- Is it safe to conduct chemical dispersant operations?
- Is the oil dispersible? (existing understanding of Stag Crude)
- Is the environment suitable for chemical dispersant operations? (water depth, weather)
- Does the oil texture allow for chemical dispersant operations? (thickness, appearance)
- Are the resources available for deployment?
- Is the mobilisation time within the Window of Opportunity?
- Has the approval for chemical dispersant spraying been granted by the appropriate authorities?
- The geographic constraints listed in Section 0

10.1 Initiation and Termination Criteria

Table 10-1: Initiation and Termination Criteria Chemical Dispersant Tactics

Tactic	Initiation criteria	Termination criteria
Mobilising dispersant	Immediately when Level 2 spill incident (Stag Crude) is confirmed	When there is no net environmental benefit of continuing dispersant application; and Agreement has been reached with the Jurisdictional Authority relevant to the spill to terminate the response
Aerial application of dispersant	Immediately when Level 2 spill incident (Stag Crude) is confirmed	When there is no net environmental benefit of continuing dispersant application Agreement has been reached with the Jurisdictional Authority relevant to the spill to terminate the response

Tactic	Initiation criteria	Termination criteria
Dispersant efficacy testing	Assessment commences immediately when a Level 2 spill incident (Stag Crude) is confirmed	When dispersant is no longer being applied.

10.2 Chemical Dispersant Action Plan

The following tactics are considered for surface chemical dispersant operations are:

- Aerial application of dispersant

The Surface Chemical Dispersion Action Plan (Section 17.6) is activated at the initial stage of the incident so that resources can be mobilised and ready for use. As the incident progresses, chemical dispersant use is continually reassessed through the NEBA and IAP processes.

10.3 Dispersant Selection

Critical to performance and effectiveness of the chemical dispersant is the weathering state of the oil it is being applied to. Semi-Quantitative Effectiveness Test (SQT) results for Stag crude, referenced to the analysis of the crude in its present state from reservoir (Stag crude is significantly degraded from reservoir), indicate that chemical dispersants would be best applied (Window of Opportunity) within the first 72 hours (three days) of a spill before the crude becomes too weathered for effective application. The SQT method applied to the Stag crude has shown an average 40% effectiveness of the three types of chemical dispersant available through AMSA and AMOSC on the NWS with the maximum effectiveness of 60%.

Given these results, Jadestone has prioritised the use of Dasic Slickgone NS and Corexit 9500. There are sufficient stockpiles of Slickgone NS and Corexit 9500 to sustain dispersant application for the three days of application (

Table 10-2).

10.4 Tasks for Mobilising Chemical Dispersants

Access to the National Plan stockpiles is via AMOSC and AMSA. The IMT will request the delivery of chemical dispersant stocks to Karratha airport (FWADC application) from AMOSC and AMSA stockpiles.

There are sufficient dispersant stocks in Dampier to last duration of application (three days). Refer to Table 10-3 for the dispersant application budget.

Under the MOU between AMSA and Jadestone, AMSA will provide all resources available through the National Plan in support of a Jadestone spill response, which includes all logistical services to transport chemical dispersants from National Plan stockpiles to Dampier. All stockpiles are deliverable to any other stockpile location in Australia within 48 hours.

Table 10-2: Chemical Dispersant Inventory as of December 2021

Owner	Stockpile Locations	Dispersant Volume (m ³)	Dispersant Type ⁵	Total Volume (m ³)
Jadestone	Darwin Supply Base and Truscott	13	Slick Gone NS	15
	Montara FPSO	2	Slick Gone NS	
AMSA	Adelaide	10	Slick Gone EW	355
		10	Slick Gone NS	
	Brisbane	10	Slick Gone NS	
		10	Slick Gone EW	
	Townsville	10	Slick Gone EW	
		15	Slick Gone NS	
	Dampier	10	Slick Gone EW	
		10	Slick Gone NS	
	Darwin	10	Slick Gone EW	
		10	Slick Gone NS	
	Devonport	10	Slick Gone NS	
		10	Slick Gone EW	
	Fremantle	48	Slick Gone NS	
		52	Slick Gone EW	
	Horn Island	10	Slick Gone NS	
		10	Slick Gone EW	
Melbourne	10	Slick Gone EW		
	10	Slick Gone NS		
Sydney	45	Slick Gone NS		
	55	Slick Gone EW		
AMOSC	Broome	14	Ardox 6120	511
	Exmouth	75	Slick Gone NS	
	Fremantle	8	Slick Gone NS	
		27	Corexit 9500	
		500 (SFRT stockpile ⁶ 50%)	Slick Gone NS	
	Geelong	75	Slick Gone NS	
		62	Corexit 9500	
TOTAL (access agreements in place)				881

⁵ All dispersants listed above are on the AMSA Oil Spill Control Agents (OSCA) list. Corexit is in Transitional Acceptance meaning that it is deemed to be OSCA registered on the basis that it has met previous acceptance requirements and is available for use for National Plan responses until used or disposed of.

⁶ As per the AMOSPlan, there is a provision made by the SFRT Steering Committee to provide up to 250 m³ of dispersant into a surface spill response, given certain provisions are met in the first instance by AMOSC (AMOSC, 2017).

10.5 Tasks for Aerial Application of Chemical Dispersants

Fixed Wing Aerial Dispersant Capability (FWADC) – notification and activation are made through AMOSC (on behalf of industry) who will liaise directly with AMSA with respect to the activation of the contract and associated aircraft. AMSA will deploy appropriate aircraft to a designated airstrip close to the spill location (e.g. Karratha Airport), and arrange for pilots, Air-Attack Supervisors, observation aircraft (one per two attack planes), trained observers, and the Search and Rescue Department for on-site emergency preparedness.

Arrival time of the aircraft will depend on flight time and will include a four-hour lead time for ‘wheels up’ from initial request. Aerial chemical dispersant application will commence within 24 hours (using worst case response time) of initial AMSA notification (daylight and weather condition dependent). Aerotech 1st Response can have three FWADC aircraft at Karratha airport 18 hours after activation and another three aircraft to Karratha within 48 hours after activation, although due to the size of the spill, only one aircraft is required.

AMOSC, with support from the IMT, is to develop an “Air Operations Plan” in accordance with the Aerial Operational Plan For Marine Oil Spills Off The Western Australian Coastline which is to be submitted to AMSA prior to commencement of any National Plan Fixed Wing Aerial Dispersant Contract (FWADC) aircraft operations.

10.6 Chemical Dispersant Application Area and Timing

All chemical dispersant operations will occur during daylight hours only.

At no time, can chemical dispersant be applied:

- In waters shallower than 20 m (LAT);
- Within 10 km of water shallower than 20 m;
- Within exclusion zones for offshore facilities;
- Within a Marine Park boundary or its buffer; and/or
- Within State Waters unless approved by the Hazard Management Agency (HMA).

The application of chemical dispersants will occur as soon as possible to ensure that chemical dispersant is applied to freshest oil. The WCS scenario for Stag is an instantaneous spill meaning that there is finite volume of oil to treat and ongoing release of oil is not occurring.

During ongoing operations, if the currents are directed toward the shallow parts of the coast, the application area must be far enough away to allow for sufficient chemical dispersal before contact with the 20 m contour. This is to be evaluated through RPS modelling requests for chemical dispersion characteristics throughout the application operation. The HMA will be notified of dispersant operations and predicted application area by the Planning Team Lead so that an assessment of movement of dispersed oil into State Waters can be made.

10.7 Dispersant Effectiveness Monitoring

If dispersants are applied to the spill, in-field efficacy testing will be conducted to ensure the product is amenable to dispersants. Jadestone will conduct in-field efficacy testing in accordance with the Special Monitoring of Applied Response Technologies (SMART) monitoring protocol (NOAA, 2006). This protocol is commonly used to measure the efficacy of dispersants, as it allows for rapid quantification of data to enable the IMT to make decisions about continuation of dispersant application. It also allows for the acquisition of more robust data using fluorometry.

The first stage of the monitoring protocol is referred to as Tier 1 Visual Monitoring. This monitoring involves experienced personnel conducting visual observations (aerial and/or vessel) of small direct applications on the hydrocarbon slick, adjusting the dispersant dilution ratio and loading through direct observations. Tier II

and III of the SMART monitoring protocols involve on-water monitoring, which combine visual monitoring with on-water teams conducting real-time water column monitoring (using a fluorometer). Tiers II and III use the same procedures, but Tier III often extends the monitoring to multiple depths and durations. This process will be continued throughout the response.

Chemical dispersant effectiveness is shown in Figure 10-1. The effectiveness of the aerial based chemical dispersion strategy is communicated to the IMT via the Air-Attack Supervisors, who are supplied by AMSA through the FWADC. Air-Attack Supervisors will advise the IMT if chemical dispersant application operations are to be terminated.

Ongoing chemical dispersant application is to be determined using the IAP process which involves a NEBA assessment, through the visual monitoring of the effectiveness of chemical dispersant applied, oil characteristics, predicted fate of the plume (updated daily), environmental conditions (sea state and weather) and surrounding environmental/ social/ cultural sensitivities. The NEBA will be re-evaluated daily during an incident to assess varying net benefits and impacts. Chemical dispersants are only to be applied if there is net benefit to the priority resources.

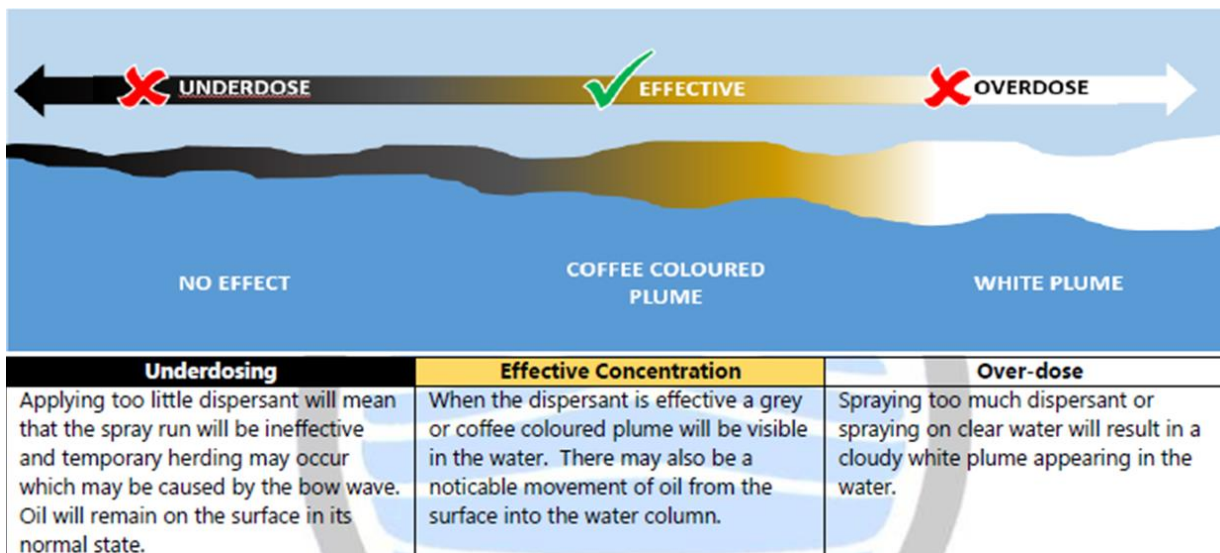


Figure 10-1: Effective and Ineffective Dispersant Application

10.8 Resource Rationale for Chemical Dispersant Application

An estimation of the resources required for the chemical dispersant strategy was undertaken and an analysis is provided below.

10.8.1 Calculations - Volume of oil to be treated

Based on the weathering properties of the oil being in the range of ~17% to 65% in the first 12 hours and ~20 to 53% in the first 24 hours, the amount of oil available to be dispersed is conservatively considered to be **75%** of the released volume (75% of 68 m³ = 51 m³).

10.8.2 Calculations - **Volume of dispersant required**

- The Dispersant to Oil Ratio (DOR) can range from 1:10 through to 1:50 or even less depending on the oil and dispersant types; and
- For planning purposes, a DOR of 1:25 is used because it is an accepted ratio to start with and can be adjusted depending on effectiveness.

10.8.3 Assumptions - Fixed wing aerial dispersant (Air Tractor) operations

- Operations will be conducted out of Dampier to the Stag Facility. Based on standard aircraft endurance of 4 hours;
- All dispersant required will be mobilised to Dampier in support of ALL aerial dispersant operations;
- Two hours (approx.) required to complete each flight operation (dispersant loading/aircraft refuelling/transit to-from spill location);
- Operations to be conducted during daylight hours only – therefore based on an estimated 10 hours daylight each aircraft will conduct approximately three sorties each day; and
- Various aircraft types are included under the provision of the FWADC. For planning purposes, a minimum payload of 3,000 litres (3 m³) will be used with respect to aircraft to be mobilised in support of the response.

10.8.4 Dispersant budget

The total amount of dispersant required for surface application over three days is 5.4 m³.

This volume can be met using the dispersant stock available in Dampier. Additional stocks can be brought in from Exmouth, if required.

Table 10-3 shows additional stocks being mobilised to Dampier as a contingency.

A combination of delivery systems was assessed and the optimum to meet the need most efficiently was by utilising:

- One FWADC air tractor

Jadestone can meet daily dispersant requirements from Day 2.

The FWADC aircraft is considered the primary platform for dispersant application operations because of the ability to treat specific areas of oil with dispersant at the required dosage and droplet size.

Table 10-3 provides a dispersant budget, noting application requirements via air can easily meet demand by Day 2 due to the relatively small volume of the spill.

Table 10-3: Dispersant application budget

Day	Volume of oil (m ³) available for treatment by dispersant (after weathering)	Maximum volume of dispersant required (m ³) based on volume of oil released and DOR	Arrival of dispersant in Dampier (m ³)	Aerial application capability (m ³)
1	51	2	10	0
2	46	1.8	Not required	9
3	41	1.6	Not required	9

11. CONTAINMENT AND RECOVERY STRATEGY

Booms and skimming equipment can be used to create physical barriers on the water surface to contain and recover the oil spill where information and predictive spill fate modelling indicate a likely threat to environmental, social and cultural sensitivities. Effective containment and recovery provides significant environmental benefit by removing floating oil and thereby decreasing the likelihood of oiling wildlife and reducing the amount of oil reaching shorelines.

Containment is the name for using booms (inflatable or solid) to corral oil usually in the offshore environment near the hydrocarbon source. Once contained, an attempt to recover the hydrocarbons from the surface waters can be undertaken. The response is only feasible in certain conditions that include:

- Weather and sea state: containment and recovery equipment is only effective in calm conditions. Effectiveness is variable depending on equipment type, but is generally only considered effective below 20 knots of wind, wave heights less than 1.5 m and currents less than 2 knots (Stevens & Aurand, 2008);
- Adequate surface thickness of hydrocarbons: containment and recovery is more effective when a sufficient oil thickness can be achieved by the containment booms (minimum of 50 g/m²), which is often limited to Group 3 and 4 (ITOPF) hydrocarbons; and
- Suitable oil type and characteristics: containment of fresh, volatile oil should not be attempted due to its low flash point. No attempt should be made until the safety of the area has been established. Containment of lighter oils such as diesel is often not viable because they evaporate and dissipate quickly.

If this option is deemed suitable through assessments and situational awareness (NEBA, trajectory to sensitivities, weather, seas state, oil type), significant logistical support will be required that will include suitable vessels, experienced crew, booms and skimmers, pumps, on-board storage for recovered oil and aircraft to direct the vessel to the areas with the thickest floating oil. In addition to logistical support requirements, containment activities are inherently inefficient due to the spreading characteristics of oil on water.

11.1 Initiation and Termination Criteria

Tactic	Initiation criteria	Termination criteria
Offshore containment and recovery	Immediately when Level 2 spill incident (Stag Crude) is confirmed.	When boom encounter rate (BER) is less than 10m ³ per hour
Offshore waste storage and collection	When offshore containment and recovery is initiated.	When all oily waste water temporarily stored offshore has been transferred to intermediate waste storage on land.

11.2 Tactics

- Offshore containment and recovery

11.3 Tasks for Containment and Recovery

In the initial response, Jadestone will mobilise ocean booms and hydraulic power pack equipment from AMSA Dampier, then from AMOSC in Exmouth. This provides the shortest timeframe for implementation. Requirements for additional resources can be assessed during the spill. If conditions and equipment are proving successful, then further activity will be implemented with vessels on contract to Jadestone using equipment (booms and pumps) from AMOSC and (AMSA) National Plan equipment, and personnel from the

AMOSC core group and National Response Team personnel through AMSA and State Response Team personnel through WA DoT.

Each vessel conducting containment and recovery is to be manned with a team of trained (minimum two) AMOSC Core Group Oil Spill Responders who will be tasked with controlling the operations and implementing in a safe and responsible method. The Team Leader has the responsibility of evaluating the effectiveness of the containment and recovery operations and communicating the information to the IMT. The IMT has the authority to demobilise or stand vessels off in the event of ineffective operations.

11.4 Tasks for Offshore Waste Storage and Collection

Activation of the Jadestone waste management contract will enable waste to be collected, stored and disposed of. Waste management is also discussed in the Jadestone Incident Management Team Response Plan (JS-70-PLN-F-00008).

Assuming favourable conditions, containment and recovery vessels operating offshore will collect floating oil using booms and skimmers. Skimmers will pump collected oily waters to IBCs or Iso-containers, where oily water will be allowed to settle such that the water phase will be suitable for over board discharge (decanting, if permitted) back into the collected oil behind the boom (to prevent secondary impacts of low concentration oil in water).

Oily waste water recovered through skimming can be up to 28 m³ per team per day, although due to the size of the spill these volumes are not expected. Decanting into boomed areas has the potential to reduce the volume of waste water collected. Depending on storage configuration, waste collected may be collected by vessels transiting the operational area, or may return to Dampier for offloading.

11.5 WA DoT Requirements for Offshore Decanting of Waste Water

During offshore containment and recovery operations there is generally a large amount of water that is collected with the oil. This water can be decanted back into a boomed area to reduce waste and create more valuable storage area. The reduction of overall waste in some circumstances can create an environmental benefit which outweighs the minimal impact caused by the release of water with very low concentrations of oil.

Under the POWBONS Act; s. 8 allows for decanting for combating specific pollution incidents. Additionally, Annex 1 of MARPOL (Regulation 9) allows for decanting for combating specific pollution events to minimize the damage from pollution. Under both MARPOL and POWBONS decanting must be approved by the government in whose jurisdiction the discharge will occur. In WA State waters this is DoT (as the Hazard Management Agency under the Emergency Management Act 2005) and in Commonwealth waters this is the Australian Maritime Safety Authority (AMSA).

To minimise the potential for recovered oil being released while the water is decanted, the following practices are recommended (IPIECA/OGP, 2013):

- The temporary storage device should, prior to use, be checked to ensure that it is not contaminated with residues from any products or substances that may previously have been stored in that device, to ensure no unauthorised discharges occur;
- Appropriate settling time should be allowed to enable gravity separation to occur prior to decanting. Settling times will vary depending on the oil type. Studies have shown that settling times for different oil types ranges from 30–60 minutes;
- Where possible, employ the use of internal baffles in the temporary storage device to help speed up the separation and prevent re-mixing of the oil and water;
- Water should be discharged either into a secondary storage container (if available) or within a boomed area with a recovery device (skimmer) so that any residual oil can be recovered;

- Visual monitoring should be undertaken at the discharge point whilst decanting to ensure that only water is released. If possible, the oil/water interface in the storage container should be monitored to ensure that only the water is being drawn; and
- Dependent on the environmental and socio-economic sensitivity of the area affected by the spill, and any other response activities that are taking place, it is advised to identify the area(s) that decanting will be undertaken.

11.6 Resource Rationale for Containment and Recovery

This strategy will mobilise containment and recovery teams available to Jadestone by arrangements with AMOSC and AMSA. Worst case spill modelling indicates that these teams would initially be deployed from Dampier for rapid response close to the spill site.

Boom encounter rate (BER) is a concept used in response planning to estimate the amount of oil that may be encountered by booming arrays and contained ready for recovery by skimmers. Formula for estimating BER is described in the Technical Guideline for the Preparation of Marine Pollution Contingency Plans for Marine and Coastal Facilities (AMSA, 2015).

11.6.1 Amount of oil available to recover

Table 11-1 is used for planning purposes to identify the number of containment and recovery systems likely to be required. This information should be used as a guide only, as the amount of oil available to recover may vary from the volumes provided below.

The weekly volumes provided in Table 11-1 are based on the weathering rates provided in Section 4.1.2.

Table 11-1: Containment and Recovery Plan Calculation

Day	Oil available to recover (m ³) after weathering and recovery	C&R Systems needed (assume 1 system = 28.2 m ³ oily waste water per day recovered)	C&R systems Jadestone can access	Potential volume of oil recovered (m ³) per day
1	51	2	0	0
2	46	2	1	28.2
3	13	2	2	56.4
As required	Fragmented windrows	2	2	56.4

11.6.2 Containment of oil

Containment calculations have been made using the AMSA Boom Encounter Rate formula:

$$BER = (LB \times 0.3) \times V \times T$$

Where:

- BER is the boom encounter rate (BER);
- LB is the length of boom deployed (200 m);
- 0.3 represents the opening of boom array (also called the swathe) and is considered to be 30% of the total boom length;
- V is the velocity of the vessel and is assumed for planning purposes to be 1 knot ; and
- T is the average thickness of oil (mm) from indicative planning targets table. Assuming 50 g/m² (0.047).

Therefore:

- $BER = (200 \times 0.3) \times 1 \times 0.047 = 2.82 \text{ m}^3$;
- 2.82 m^3 is the amount of oil 1 system can encounter in 1 hour @ 50 g/m^2 ; and
 - For planning purposes one “Containment & Recovery” system equates to over a 10 -hour day:
 - Two x vessels with 200 m offshore boom, 1 x offshore skimmer @ min. $2.82 \text{ m}^3/\text{hour} = 28.2 \text{ m}^3/\text{day}$.

11.6.3 Resources

Jadestone has the ability to mobilise one containment and recovery system by Day 2 and two systems by Day 3. Two systems have the ability to recover more than the estimated volume of oil available by Day 3. However, containment and recovery systems will be retained after this period to recover any fragmented sections of the spill. If the trajectory modelling indicates that shoreline accumulation will occur, containment and recovery vessels can be directed towards protecting those shorelines and priority receptors.

The vessels and crew are accessed from a combination of companies that Jadestone currently holds MSA’s with, call-off contracts and in consultation with Jadestone’s approved marine broker. Personnel will be sourced from AMOSC core group (84, as per monthly availability), and National Response Team personnel (~70) to be accessed through AMSA.

Active booming systems are deployed to allow containment and recovery operations without the need for an additional skimming system (where deployed). This allows for greater effectiveness and continuation of skimming operations. Active booming systems are available through AMOSC and would be prioritised for mobilisation. Rapid sweep systems are also deployed, which allow containment and recovery operations to be undertaken at speeds of up to 3 knots. This allows for greater encounter rates and surface coverage.

For planning purposes, the vessel speed of 1 knot was chosen as this allows for more manoeuvrability and targeting of oil windrows. In support of containment and recovery operations it is intended to establish a Logistics Base in Dampier utilising support provided by the current contracted Jadestone logistics support service provider.

12. PROTECTION AND DEFLECTION STRATEGY

Booms can be used to create physical barriers to protect sensitive receptors. This option is often used in nearshore environments in close proximity to the area requiring protection. It can be installed in deeper water further from the protection priority with the intent of taking the oil off its trajectory path to the sensitive receptor.

This strategy involves a combination of nearshore booming using vessel-based operations ('nearshore operations') while the spill remains on a predicted shoreline impact trajectory, and the placement of shoreline boom around areas to:

- Protect sensitive shorelines;
- Deflect the oil back to ocean or to easier locations for shoreline clean-up;
- Reduce the volume of oil impacting sensitive shoreline habitats to ALARP; and
- Align the response strategy with NEBA.

Much of the potential deployment locations are characterised with large tidal movements (>10 m), which would result in tidal currents exceeding boom capabilities. Protection booms will only be installed in areas where the tidal currents are below 0.75 knots.

Protection and deflection activities are advised for slicks greater than 100 g/m². Modelling shows that the oil decreases below the 100 g/m² threshold rapidly when the oil is at the surface, thereby constraining minimum arrival times to relatively low values or no accumulation above this threshold (i.e. low oil persistence at concentrations >100 g/m² due to evaporative losses and spreading).

It should be noted that operationally the effectiveness of this strategy will vary depending on the level of accumulation at different locations. Operational monitoring data will provide important information for response decision making. If a tangible, positive outcome is demonstrated, and if health and safety risks are not disproportionate to the environmental benefit achieved in mobilising the response, a protect and deflect operation may be possible. Jadestone have provided guidance within this OPEP in the event the IMT is required to mobilise equipment and personnel to potentially contacted shorelines, prior to that identified in the oil spill modelling.

12.1 Initiation and Termination Criteria

Tactic	Initiation criteria	Termination criteria
Nearshore booming	When OSTM indicates shoreline accumulation may exceed the >100 g/m ² threshold	When shoreline receptors no longer able to be protected by nearshore booming.

12.2 Tactics

Given the remoteness and nature of the shorelines potentially contacted, Jadestone has prepared a protection and deflection response that caters for the priority receptors and can move to other locations as required. Deployment is subject to safety concerns of operations in high tidal influence and shallow waters; and possible grounding issues of small vessels, so must therefore be assessed under a NEBA.

The locations for initial nearshore protection and deflection operations will be evaluated by the IMT through observations and modelling during the incident response. Locations identified for potential shoreline impact are to be cross-referenced with the shoreline sensitivity and feature mapping data available through the DoT Oil Spill Response Atlas (OSRA).

As deflection and protection operations will occur in State/Territory Waters, the HMA will direct the response operations to locations identified in the Jadestone OPEP or as determined by real time data and State/Territory priorities receptors.

If deployment of protection and deflection booms is considered feasible and effective, inspections and maintenance of the booms are to be timed based on tidal cycles and are to be undertaken by response personnel to ensure locations and formations are maintained so that they remain effective in achieving objectives.

The range of protection and deflection methods include nearshore booms (beach guardian, zoom boom, short curtain boom and sorbent boom) anchored close to the identified priority receptor areas, or open water booms (deep curtain ocean boom) placed at significant distances from shorelines to deflect the open water pathway of the oil to force the oil to miss the predicted shoreline requiring protection.

Operational monitoring and Incident Action Planning will guide the response to prioritise protection of sensitive key features. The protection and deflection response are to be scaled to be commensurate to the risk posed by an actual incident. The results of spill fate modelling will provide the accumulated oil information which will enable calculation of the required amount of protection and deflection equipment.

Initial deployment of equipment and personnel is to be from the AMSA, State/Territory and AMOSC stockpiles and Core Group. Depending on actual conditions and possible responses to the reduce impacts to ALARP, further deployments of resources can be implemented through the AMSA National Plan shoreline response equipment stockpiles and NRT personnel, as agreed with by AMSA and Jadestone and implemented by the relevant Incident Management Team.

While equipment and personnel mobilisation are occurring, operational monitoring is continuing and the results sent to the IMT within two hours of teams returning to their operating base. The most up-to-date information will then be communicated to the protection and deflection teams to guide the selection of the operational locations.

The HMA will advise on priority receptors aided by the oil spill trajectory modelling to locations with the most likely impact. Deployment locations will be selected from the closest facilities to where priority receptors are identified.

The effectiveness of the protection and deflection strategy to achieve performance objectives against the IAP objectives is to be communicated to the IMT by a nominated Shoreline Response Team Leader. The IMT has the responsibility to extend or terminate the response in consultation with the HMA.

12.3 Priority Receptors

In locations along the Pilbara Coastline, shoreline access is often restricted and much of the coastline is only accessible via vessel, making it difficult to access suitable locations to install protection booms. For these areas the removal of oil using offshore Containment and Recovery, together with the application of dispersants, is the key strategy for preventing shoreline impacts.

In some offshore locations the water may be sufficiently calm to install fixed booms in deep water to assist in the protection of highly sensitive areas where shoreline clean-up may be very difficult to effectively achieve. This will be considered to protect large mangrove stands that are difficult to access, however, the large tidal range will result in high velocity water and may exceed the operating parameters of booms.

The minimum time for oil contact at a priority receptor at $>100 \text{ g/m}^2$ is 1.4 days (Table 12-1) with most areas on a scale of more than 2 weeks.

This provides time for pre-assessment of shoreline areas for which oil may accumulate, noting sensitive receptor locations, fauna presence (e.g. nesting turtles and birds) and morphology of shorelines/creek systems. These aspects change seasonally, and a pre-assessment window provides the ability for up to date information to be considered when formulating a specific plan for shoreline protection.

12.4 Resource Rationale for Protection and Deflection

OSTM outputs assisted in identifying priority receptors and to help determine the number of shoreline protection and deflection operations required for each location. The resource rationale presented in Table 12-1 is for capability analysis only and would be revisited should a spill occur.

Table 12-1 presents resourcing requirements using the stochastic modelling results for shoreline accumulation >100 g/m². It should be noted that not all of the receptors listed in Table 12-1 may be contacted by one single spill. These results are presenting the range of possible worst-case timeframes for accumulation and length contacted based on all runs that make up the stochastic model. Jadestone will use initial operational monitoring data (e.g. trajectory modelling and aerial surveillance) to determine where resources should be allocated. This may include directing resources to conduct shoreline assessment at locations not identified as protection priority areas, to determine if protection and clean-up activities may be required at these receptors.

For planning purposes, **one protection and deflection operation** consist of:

- Boom (shore sealing, self-inflating and solid flotation);
- Ancillary equipment and vessels (if required);
- 2 trained oil spill responders; and
- 5 personnel / labour hire to deploy the booms.

Jadestone will access to resources via AMOSC and AMSA. Jadestone could purchase equipment and store at Dampier, however, this is costly and the limiting factor for response timeframes is accessing the required number of people.

Table 12-1: Shoreline protection resource requirements for priority receptors based on stochastic modelling

Priority receptor	Minimum time to shoreline oil accumulating >100 g/m ² (days)	Oiled shoreline length at concentrations >100 g/m ² in worst replicate simulation (km)	Number of shoreline protection and deflection operations recommended
Dampier Archipelago	7	10	1
Montebello Islands	1.4 ⁷	8	1
Lowendal Islands	26	4	1
Barrow Island	26	2	1
Eighty Mile Beach	14	4	1

⁷ All results presented in this table are from Scenario 1 (release of 86.5 m³) for the period September to February, with the exception of Montebello and Lowendal Islands which are the same scenario but the period of March to August.

13. SHORELINE CLEAN-UP STRATEGY

Shoreline clean-up in State Waters is managed by the HMA (DoT). Jadestone will undertake first-strike activations as required. The HMA will direct resources provided by Jadestone for the purposes of shoreline clean-up. Jadestone, in combination with the mutual aid arrangements of the AMOSPlan are to provide all necessary equipment and personnel.

The information obtained from operational monitoring (refer to Section 9), will be used to identify possible impact areas, and by the IMT in the development of the operational NEBA. The operational NEBA will assess if shoreline clean-up activities will be beneficial in accelerating the return of the shorelines to baseline conditions.

13.1 Initiation and Termination Criteria

Tactic	Initiation criteria	Termination criteria
NEBA of shoreline response strategies	When SCAT surveys recommend shoreline clean-up activities.	When SCAT surveys recommend no further action be taken (NFA).
Shoreline clean-up and waste management	When NEBA of shoreline strategies recommends shoreline clean-up activities.	When SCAT surveys recommend no further action be taken (NFA). Agreement has been reached with the Jurisdictional Authority relevant to the spill to terminate the response

13.2 Tactics

- Undertake a NEBA of shoreline response strategies utilising findings from SCAT surveys; and
- Implement shoreline clean-up and waste management

13.3 Tasks

For planning purposes, Jadestone uses a minimum threshold of 100 g/m² (concentration of accumulated hydrocarbons on shorelines) to determine the lower limit for effective clean-up operations.

Once SCAT surveys of key shorelines have been completed, the results would help inform an operational NEBA and suitable response tactics for that location. Response tactics may include manual bagging of stranded oil where access can be gained, surf washing where wave action and sandy beaches are accessible by machinery, tilling and turning the sand to aid bioremediation where wave action is not strong enough to drive surf washing, rock flushing with high volume low pressure sea water, or leaving the weathered oil in-situ to breakdown where access for man or machinery is not possible.

Shoreline habitats in the region predominantly comprise of high relief rocky shoreline, sandy beaches, intertidal reefs, and mudflats/mangrove habitats. Macroalgal and seagrass beds will be avoided when assessing shoreline clean-up response tactics and the less intrusive options of natural attenuation and bioremediation will be preferred.

Information on shoreline type obtained from SCAT surveys will contribute toward the NEBA process. Each likely shoreline impact will be evaluated through observations and modelling, and shoreline response teams will be deployed and positioned as per those observations. Through information gathered and assessed by the IMT and HMA, the movement of floating oil towards shorelines is to be identified and clean-up tactics implemented to reduce the consequences to shoreline habitats to ALARP. A summary of shoreline clean-up techniques is provided in Table 13-1.

Intrusive shoreline clean-up techniques have the potential to damage sensitive shorelines. Given that the majority of the mainland shoreline contacted consists of tidal mangroves and saltmarshes, and the islands predicted to be contacted are also inhabited by tidal mangroves and sensitive species, the appropriateness of clean-up will be determined as opposed to natural attenuation. Selection of the shoreline clean-up

methods and controls to prevent further damage from the clean-up activities are to be undertaken in consultation with the HMA and selected based on NEBA.

Jadestone will have an agreed process which allows for stakeholder input into the termination criteria as per AMSA Guidance NP-GUI-025 2015. The degree of damage from shoreline clean-up activities is to be managed to ALARP, considering net environmental benefit of the clean-up activity.

AMOSOC Core Group Responders may be substituted with NRT personnel as agreed by AMSA with Jadestone. AMSA will be a member of the IMT and will confirm and approve NRT personnel deployment as they deem necessary to reduce impacts to ALARP.

Table 13-1: Shoreline clean-up techniques

Method	Description
Mechanical clean-up	Mechanical clean-up techniques may utilise several equipment types. It is best to use equipment in the way for which it was designed. Front end loaders, bulldozers and elevating scrapers can all be used to rework beach sediment (e.g. cobble, pebble, and boulder) or to push such sediments into the shoreline for cleaning by waves. Note: Vehicles should not be allowed to pass over oiled sediment since this tends to result in the burial of oil into sediment.
Manual clean-up	Manual clean-up is the preferred option for cleaning inaccessible shorelines or those where mechanical clean-up is undesirable. Manual clean-up is slower than mechanical clean-up but generally results in the removal of much less sediment. Hence disposal requirements are reduced. Equipment is usually basic and consists of wheelbarrows, rakes, buckets, shovels, plastic bags (industrial strength) or other temporary storage. The requirements for manual beach clean-up are highly variable but generally a 10-person team, plus 1 supervisor is required to recover 10 m ³ of oil in one day.
Low pressure flushing	Low pressure flushing can be used, with care, to remove surface oils from most beach type surfaces. It is important that refloated oil is collected in booms or other containment devices and recovered using skimmers or sorbents. Generally low-pressure flushing does not result in the emulsification of oils and so sorbents may be used. It is preferable to check the condition of refloated oil and choose a suitable skimming device and pump. It is important also that refloated oil does not pass over clean sediment.
High pressure flushing	High-pressure washing is to be used only on artificial surfaces such as wharves, jetties etc. This method tends to emulsify oil and consequently the use of sorbents to collect refloated oil is not recommended. Oil, which is removed from surfaces, can be collected within light inshore booms or onshore using Shore Guardian or a similar boom. Oil can be recovered using vacuum systems or skimmers. Material and labour requirements are highly variable and will depend on the extent of oiling, the speed with which cleaning is expected to proceed, the type of substrate and the ease with which containment can be achieved.
Enhanced bioremediation (sediment reworking)	Machinery is used to breakup large paddies of stranded oil on beaches and to till and turn the oiled sands to aerate the sandy sediment and enhance the biological breakdown of the oil. This can be applied to oil that has deposited on sands above the normal high-tide area, typically during large storms, and there is little likelihood of the water reaching the stranded deposits.
Monitoring of natural attenuation and bioremediation	By implementing shoreline clean-up methods described above, the amount of oil remaining stranded on shorelines will be reduced to ALARP; the remaining oil will be very difficult to access or remove and the activity is no longer preferred under NEBA when compared to the impacts of the intrusive clean-up methods. In addition, and assessed under NEBA, some areas of coastline will not be subjected to any clean-up methods due to access issues or possible impacts from the clean-up activities. It's at this point that monitoring of natural attenuation and bioremediation become the selected clean-up methods under a NEBA assessment. These areas will be monitored until no visible oil is remaining in the impacted area.

Method	Description
<i>Supplementary equipment</i>	
Sorbents	Two types of sorbent materials can be used; (1) loose, powdered or granular sorbents, or (2) solid, pads, rolls or sheets. Each of these may be either of synthetic or natural fibre. As a general rule, loose sorbent materials are not used because they are difficult to recover. However, there are occasions when this is not considered to be a problem, such as in high-energy areas where oily sorbent materials can be expected to be washed from surfaces and dissipated to sea. Of course, oil too is likely to be washed off such shorelines, to dissipate. Solid sorbents may be used in the form of sorbent booms to recover light oil films or as pads or rolls to absorb free oil from the surface of sediments in cases where vacuum systems cannot gain access or where oil is too fluid for manual recovery.
Vacuum systems	Vacuum systems may be portable hand operated systems or vacuum trucks. Vacuum systems tend to pick up large volumes of water with the oil and so it is preferable to use them on oil pooled on the sediment surface or to remove oil from containers or dams in which the water has been decanted. One method to minimise the amount of water removed from the beach is to use light, portable vacuum systems to deposit oil-water into temporary storage containers on the beach, allow settling time and to decant the water. Large units can then be used to collect the oil from these containers and transport oil to storage sites. Vacuum systems can also be used in association with deflection booms to recover oil from the sea surface. It is advisable in this case to fit the hose with a broad Manta Ray head.

13.4 Resource Rationale for Shoreline Clean-Up

The combination of machinery for mechanical removal of oil (bulldozers/ scrapers/ front end loaders) and personnel requirements have been considered for each protection priority area based on opportunities for use and sensitivity of shoreline (i.e. may not be used for small offshore islands or for remote rocky or mangrove lined shorelines). Therefore, it is the opportunity for use rather than the availability of machinery and personnel which is considered the limiting factor.

Analysis of the worst replicate simulation for the greatest number of shoreline clean-up responders required, and highest probability for shoreline accumulation > 100 g/m² has been used to inform the personnel and waste requirements for shoreline clean-up. It is assumed that planning for the greatest number of teams will meet these requirements. Jadestone has planned for a trained oil spill responder and 9 personnel in each shoreline clean-up team and assume that each team can recover 10 m³ per day. Actual personnel numbers will vary according to the shoreline clean-up techniques recommended by SCAT teams during their field assessment of affected shorelines and the operational NEBA assessment, which will be performed prior to a Shoreline Clean-up Plan (IAP Sub-plan) (Refer to Section 17.9) being developed. The locations and numbers below are presented for capability analysis only and will be revisited should a spill occur.

13.5 Priority receptor

A number of the priority receptors predicted to be contacted at concentrations >100 g/m² under the worst-case replicate simulation includes tropical environments with extensive mangrove communities, deltas and tidal wetlands. The tidal ranges in this region are large (7-10 m) and much of the coastline is remote and inaccessible via road, making many of the shoreline clean-up techniques described unsuitable (e.g. mechanical removal, enhanced bioremediation, vacuum trucks, high pressure flushing) and their use is likely to result in greater environmental impacts than the oil itself. In addition, the remote nature, presence of dangerous fauna (i.e. Saltwater crocodiles and Irukandji jellyfish) present significant safety risks to responders working in these environments.

Large scale operations involving large numbers of personnel may cause adverse environmental impacts at many of these sensitive shoreline locations. The constant removal of oil, even via manual removal can result in a removal of substrate (e.g. sand, pebbles). If intrusive clean-up is conducted frequently, over a long period

of time and along contiguous lengths of coastline, this may result in geomorphological changes to the shoreline profile and adverse impacts to shoreline invertebrate communities which provide an array of ecosystem services (Michel, et al., 2017).

Given the safety constraints and ecological sensitivities of these shorelines, shoreline clean-up operations should be conducted by smaller teams (max 10 people/team) for a longer period. Intermittent manual treatment (<20 visits/month) and use of passive recovery booms is likely to be more effective than intrusive methods (e.g. intrusive manual removal >20 visits/month). Although this may take longer to undertake the clean-up, it is considered that the benefits outweigh the impacts as smaller teams are more targeted, recovering more oil and less sand and debris, reducing trampling of oil into the shore profile and will minimise ecological impacts on the shorelines and their sensitive species.

Table 13-2 presents the maximum daily accumulated oil (m³) and a worst-case bulking factor for waste for the identified priority receptors. The number of shoreline clean-up teams recommended to treat these shorelines is not based on extensive, intrusive and contiguous removal of oil and waste along all shorelines, but rather use of smaller teams and at lower frequency of visits. Where shoreline based manual removal is safe and deemed advantageous by SCAT teams and operational NEBA, this should be conducted via land access (if possible) or via suitable vessels. However, it should be noted that it is generally not feasible to move response equipment into and out of mangroves, tidal flats and delta environments without causing excessive damage. Even foot traffic must be minimised, either by laying down wooden walkways or relying on vessel-based activities as much as possible (API, 2020).

Table 13-2: Shoreline clean-up resource requirements for priority receptors based on stochastic modelling

Receptor	Minimum time to shoreline accumulation at or above 100 g/m ² (days)	Accumulated oil on shoreline in worst replicate simulation at or above 100 g/m ² (m ³)	Number of shoreline clean-up teams recommended (1 team per 10 m ³ /day)	Number of shoreline clean-up responders required (10 per team)	Potential waste generated (worst replicate simulation) bulking factor of 10 (m ³)
Dampier Archipelago	7	19	2	20	190
Montebello Islands	1.4 ⁸	33	2	20	330
Lowendal Islands	26	7	1	10	70
Barrow Island	26	2	1	10	20
Eighty Mile Beach	14	7	1	10	70

13.6 Shoreline Clean-up Waste

Shoreline clean-up waste will consist of oil, oiled substrate (e.g. sand, pebbles), oiled debris, oiled sorbents, PPE and animal carcasses. Activation of the Jadestone waste management contract will enable clean-up waste to be collected, transported, stored and disposed of. Waste management is also addressed in the IMTRP.

Jadestone’s waste management contractor has sufficient onshore temporary waste storage in the form of different volume skip bins, lift bins and hook lift bins, all of which can be mobilised and made available in

⁸ All results presented in this table are from Scenario 1 (release of 86.5 m³) for the period September to February, with the exception of Montebello and Lowendal Islands which are the same scenario but the period of March to August.

Dampier within 24-48 hours of activation. Jadestone can also access temporary onshore storage tanks, bladders and containers through its membership with AMOSC.

13.6.1 Accessible shorelines

Along the affected accessible shorelines, temporary waste storage will be distributed by telehandlers and readily accessible by clean-up crews. Wastes will then be either collected by operating mobile plant such as excavators, or through manual waste removal (bagged waste), and deposited into these bins.

Waste-related telehandlers will operate collection services along the hot zone, picking up filled bins while returning empty bins for further collection. Wastes collected will initially be consolidated into 10 m³ skips located within the warm zone. These skips will then be removed from the warm-zone to the temporary holding facility located within the operational areas, for loading onto semi-trailers or road trains pending final disposal to landfill.

For accessible shorelines, the IMT will determine the most suitable method of shoreline clean-up (Refer to Table 13-3) through an Operational NEBA assessment.

13.6.2 Remote Locations/Islands Waste Management

As described in Section 13.5, the majority of shorelines predicted to be impacted from a worst-case credible spill are in areas with limited to no road access. Manual removal is the preferred method of clean-up for these areas and will be supported using vessels capable of shoreline landings, smaller machinery (where appropriate) and helicopters to deliver equipment and personnel and remove collected waste.

Access and all clean-up activities will be conducted via vessels or helicopters in front of the primary dune of the impacted shoreline. Jadestone will not access any areas behind the primary dune of impacted offshore islands during any stage of the clean-up operation.

Equipment delivery - If the impacted shoreline can be accessed with a barge and landing craft, crew on the barge will deliver an appropriate number of clean-up packs (to cater for the number of response personnel defined in the IAP) onto the impacted shoreline above the high tide mark. A helicopter will deliver the appropriate number of clean-up packs if barge access is not possible.

Personnel - Response personnel may be transported to the impacted shoreline on a barge. If access is not possible by barge, helicopters may be used to transport personnel. Response personnel will not camp on islands due to potential for additional impacts from this activity.

Initially, response personnel will shovel the oily waste into small manageable bags (weighing 20–30 kg when full) which will be stored in a lined, temporary storage area until they are removed. The temporary storage area will be located at the bottom of the primary dune and above the Highest Astronomical Tide (HAT) mark.

Waste collection – Response personnel will transfer the small bags of solid oily waste and small drums of liquid waste from the temporary storage area to a container within the barge. All-Terrain Vehicles and bobcats may also be used for the same purpose where appropriate. The barge will then steam to the closest service wharf and transfer the waste onto a waste truck supplied by Jadestone's waste management contractor. In areas where a barge cannot access the shoreline, oily waste will be placed in an underslung load and transferred by helicopter to the closest land-based point that has vehicle access for onward movement.

Table 13-3: Shoreline Clean-up Selection Factors by Shoreline Type, Oil Type and Degree of Oiling

Shoreline Type	Type of Oil	Degree of Oiling*	Shoreline Clean-up Tactic			
			Natural Recovery	Manual and Mechanical	Sediment Reworking	Flooding and Flushing
Exposed Rocky Shores	1	Light	☑	☑	☑	☑
		Moderate	☑	☑		☑
		Heavy	☑			☑
	2	Light	☑	☑	☑	☑
		Moderate	☑	☑		☑
		Heavy	☑	☑		☑
	3	Light		☑		☑
		Moderate		☑		☑
		Heavy				☑
Sandy Shores and Beaches	1	Light	☑	☑	☑	☑
		Moderate	☑			☑
		Heavy				☑
	2	Light	☑	☑	☑	☑
		Moderate	☑	☑		☑
		Heavy		☑		☑
	3	Light		☑		
		Moderate		☑		
		Heavy		☑		
Artificial Structures	1	Light	☑	☑		☑
		Moderate	☑	☑		☑
		Heavy		☑		☑
	2	Light	☑	☑		☑
		Moderate	☑	☑		☑
		Heavy		☑		☑
	3	Light		☑		☑
		Moderate		☑		☑
		Heavy		☑		☑
Sheltered Rocky Shores	1	Light	☑	☑	☑	☑
		Moderate	☑	☑	☑	☑
		Heavy				☑

Shoreline Type	Type of Oil	Degree of Oiling*	Shoreline Clean-up Tactic			
			Natural Recovery	Manual and Mechanical	Sediment Reworking	Flooding and Flushing
	2	Light	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
		Moderate	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
		Heavy		<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>
	3	Light	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
		Moderate	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
		Heavy		<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>
Mud and Tidal Flats	1	Light	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>
		Moderate	<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>
		Heavy				<input checked="" type="checkbox"/>
	2	Light	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>
		Moderate	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>
		Heavy				<input checked="" type="checkbox"/>
	3	Light	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>
		Moderate	<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>
		Heavy				<input checked="" type="checkbox"/>
Mangroves and Wetlands	1	Light	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>
		Moderate	<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>
		Heavy				<input checked="" type="checkbox"/>
	2	Light	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>
		Moderate	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>
		Heavy				<input checked="" type="checkbox"/>
	3	Light	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>
		Moderate		<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>
		Heavy				<input checked="" type="checkbox"/>

14. OILED WILDLIFE RESPONSE

If a spill occurs in WA State waters or enters State waters, Department of Biodiversity Conservation and Attractions (DBCA) is the Jurisdictional Authority for wildlife, and for level 2/3 spills, will also lead the oiled wildlife response under the control of DoT. For level 1 spills, Jadestone will be the Control Agency, including for wildlife response. It is however also an expectation that for level 2 petroleum activity spills, Jadestone will conduct the initial first-strike response actions for wildlife and continue to manage those operations until DBCA is activated as the lead agency for wildlife response.

The key plan for OWR in WA is the Western Australian Oiled Wildlife Response Plan (WAOWRP). The WAOWRP establishes the framework for preparing and responding to potential or actual wildlife impacts during a spill and sets out the management arrangements for implementing an OWR in conjunction with the State Hazard plan: Maritime Environmental Emergencies. It is the responsibility of DBCA to administer the WAOWRP under the direction of the DoT. The Pilbara Region OWRP, which sits under the WAOWRP provides operational guidance to respond to injured and oiled wildlife in the Pilbara region and covers the areas potentially contacted by oil from a spill associated with Stag drilling activities.

14.1 Initiation and Termination Criteria

Table 14-1: Initiation and Termination Criteria

Tactic	Initiation criteria	Termination criteria
Wildlife first response Mobilisation of resources Wildlife reconnaissance	Immediately when Level 2 spill incident is confirmed.	When the NEBA for oiled wildlife response activities indicates no further action required (NFA).
IAP wildlife subplan Wildlife rescue and staging Oiled wildlife response facility Oiled wildlife rehabilitation Oiled wildlife response termination	When oiled wildlife first response has transitioned to IAP subplan development.	When the NEBA for oiled wildlife response activities indicates no further action required (NFA).

14.2 Wildlife first response

The most effective means of preventing wildlife from being impacted by the spill is through the spill response actions taken to minimise the impact area (e.g. containment, clean-up and preventing further discharge of hydrocarbons).

OWR includes wildlife surveillance/reconnaissance, wildlife hazing, pre-emptive capture and the capture, cleaning, treatment, and rehabilitation of animals that have been oiled. In addition, it includes the collection, post-mortem examination, and disposal of deceased animals that have succumbed to the effects of oiling.

Wildlife surveillance/reconnaissance is a critical component of an oiled wildlife first response. Table 14-2 outlines species, life-cycle stages, and key risk periods to consider when developing a wildlife reconnaissance plan. Wildlife reconnaissance should be undertaken in close consultation with personnel undertaking relevant operational monitoring activities. The information gathered from wildlife reconnaissance and all relevant pre-existing wildlife data/information should be used to inform decisions and aid the development of the Wildlife portion of the IAP.

Table 14-2: Wildlife Reconnaissance Considerations (adapted from the WAOWRP)

Species	Life Cycle	Risk period	Reconnaissance Considerations
Birds			
Migratory and resident shorebirds	Foraging, roosting	Migratory shorebirds: Sept- Mar Resident shorebirds and some juvenile migrants remain year-round (Migratory shorebirds do not nest in Australia)	Migratory shorebirds mostly feed on intertidal mud flats during mid to low tides, roosting at high tide Surveys for roosting shorebirds should be conducted as close to high tide as practicable and no more than two hours either side of high tide (unless local knowledge indicates a more suitable time) Surveys for foraging shorebirds should be conducted as close to low tide as practicable and no more than two hours either side of low tide (unless local knowledge indicates a more suitable time)
Resident shorebirds	Nesting	Peak nesting August to February	Nest on coastal beaches, wetland fringes and islands, above the high-water mark Surveys need to be undertaken to determine nest locations adjacent to and along impacted shorelines
Seabirds- sea forages that utilise islands and coasts such as terns, gulls, boodies, gannets, noddies, shearwaters	Foraging, roosting	Year-round	Can forage long distances from nesting and roosting sites Birds oiled during feeding may be unable to flyback to shore so aquatic patrols of feeding areas and shorelines should be considered Show a preference for roosting on sandy points, spits and low rocky bars near the ocean Birds lightly oiled or coated with light oils may be able to fly back to roosts, which may be up to 50 km from oiling Searches and monitoring should include roosting sites
	Nesting	September to March	Nest on islands or the mainland coast either on the surface (e.g. terns), rock crevices, in vegetation or in burrows (e.g. shearwaters) Monitor nesting adults and nestlings for oiling impacts

Species	Life Cycle	Risk period	Reconnaissance Considerations
Seabirds- cormorants and darters all species	All	Year-round	<p>Predisposed to oiling as they will readily swim through heavy oils</p> <p>May travel large distances from roosting sites but feed close to shore</p> <p>Cormorants saturate their feathers to hunt and will look wet after foraging when drying wings for flight (may be confused with light oiling)</p> <p>Roosting sites may vary according to wind conditions and food availability</p> <p>Cormorants prefer roost on elevated coastal headlands or trees to assist take off</p> <p>Nest on elevated coastal headlands and vegetation or in vegetation in freshwater swamps</p>
Waterbirds	All	Year-round	<p>Found in freshwater brackish and coastal habitats</p> <p>Herons and Egrets tend to forage amongst mangroves and on intertidal flats or shallow pools near roosting sites</p> <p>Pelicans prefer shallow protected waters for feeding. Pelicans can travel very large distances from roost or breeding sites to foraging areas</p> <p>Herons and egrets nest sparsely in coastal vegetation</p> <p>Pelicans nest in colonies on inland lake and coastal islands</p>
Marine birds of prey	All	Year-round	<p>Ospreys often plunge into water to hunt fish, while white-bellied sea eagle plucks fish from water on the wing</p> <p>Elevated perch with view of ocean are preferred</p> <p>Make large nests comprised of sticks on tall structures (trees, mangrove, man-made) or rocky headlands</p> <p>Monitoring of local raptors should be undertaken, focusing on known nest sites and perches</p>

Species	Life Cycle	Risk period	Reconnaissance Considerations
Sirenians and cetaceans			
Dugongs			Population data limited Aerial surveillance Dugongs spend most of their time in less than 3 meters of water
dolphins and whales			Population data limited Aerial surveillance
Marine turtles			
	Foraging	Year-round	Within Australian waters, most juvenile and sub-adult turtles show strong fidelity to chosen feeding grounds and do not move large distances There are current knowledge gaps regarding foraging sites for many turtle species in Australian waters Aerial surveys are applicable to turtles in-water as they must periodically surface to breathe, and a fraction of the turtles in an area will be on the surface and available for counting at any given time Turtles smaller than 60 cm in carapace length are difficult to detect by aerial surveillance
	Nesting and nests	Approximately October to February (species differences exist)	For nesting, nesting beaches should be patrolled (on-foot) nightly between approximately 17:00 hours and 04:00 hours Day-time surveys for tracks and other evidence left on the beach after a marine turtle has emerged (crawls) can be used to identify the species and the location of turtle nests
	Hatchlings	Approximately January to March (species differences exist)	Sea turtle hatchlings typically emerge at night

14.3 Oiled Wildlife Response Levels and Personnel Requirements

The WAOWRP nominates oiled wildlife response incident Levels based on the scale and severity of oiled wildlife impacts. Table 14-3 provides the indicative level descriptions for Level 1 to Level 6 incidents. The WAOWRP Plan also nominates indicative personnel numbers and role requirements for each OWR Level.

Jadestone is approaching oiled wildlife preparedness in a conservative manner by preparing for a OWR Level 3 event.

The indicative personnel required for a Level 3 OWR is 59 personnel (WAOWRP), however the number of personnel may change depending on the complexity of the response (spatial scale and variety of wildlife impacted). Many of the roles required for an OWR require technical expertise and Jadestone will need to activate OWR arrangements with AMOSC and OSRL to fulfil roles, as well as make contractor arrangements for accessing skilled wildlife personnel at the time of a spill. Non-technical wildlife support roles could be filled by labour hire agencies that undergo an induction and basic training.

Further information describing oiled wildlife response arrangements is provided at Appendix A of the Incident Management Team Response Plan (JS-70-PLN-F-00008).

Table 14-3: Oiled Wildlife Response Levels

OWR level	Duration of OWR	Birds general	Birds OWR complex #	Turtles - hatchlings / juveniles / adults	Dolphins / Whales	Pinnipeds	Mammals terrestrial	Reptiles	Dugongs
Level 1	<3 days	1-2 birds per day or < 5 total	No complex birds	None	None	None	None	None	None
Level 2	4-14 days	1-5 birds per day or <20 total	No complex birds	< 20 hatchlings no Juveniles or adults	None	None	None	None	None
Level 3	4-14 days	5-10 birds per day or < 50 total	1-5 birds per day or <10 total	< 5 juv/adults, < 50 hatchlings	None	< 5 seals	< 5	< 5 - no crocodiles	None
Level 4	>14 days	5-10 birds per day or < 200 total	5-10 birds p/day	< 20 juv/adults < 500 hatchlings	< 5 or known habitats affected	5-50 seals	5-50 mammals	5-50 reptiles	Dugong habitat affected only
Level 5	>14 days	10-100 birds per day or > 200 total	10-50 birds per day	>20 juv/adults, > 500 hatchlings	>5 dolphins	> 50 seals	> 50 mammals	>50 reptiles	Dugongs oiled
Level 6	>14 days	>100 birds for day	10-50 birds per day	>20 juv/adults, > 500 hatchlings	>5 dolphins	> 50 seals	> 50 mammals	>50 reptiles	Dugongs oiled
# Threatened species, protected by treaty, or specialist feeders									

15. REVIEW OF OPEP

This OPEP shall be reviewed, updated (if required) and submitted to NOPSEMA every 5 years from date of acceptance.

The document may also be reviewed and revised more frequently, if required, in accordance with Jadestone's Management of Change Procedure. This could include changes required in response to one or more of the following:

- On an annual basis (12 monthly); or
- When new testing response arrangements are introduced; or
- When response arrangements are significantly amended; or
- After a significant change to Jadestone's risk profile.

The extent of changes made to the OPEP and resultant requirements for regulatory resubmission will be informed by the relevant Commonwealth regulations, i.e. the OPGGS (E) Regulations.

16. CONTROLS

Environmental performance outcomes (EPOs) of the response strategies, control measures, performance standards presented in Table 16-1 are:

- Reduce oil volumes from reaching the shoreline to as low as reasonably practicable; and
- Reduce impacts to marine and coastal fauna through the implementation of the WA Oiled Wildlife Response Plan.

Table 16-1: Operational Performance Standards and Measurement Criteria

Response Element	Control Measures	Performance Standards	Measurement Criteria
Notifications and Activations	AMOSC activation	Verbal notification/activation of AMOSC within 60 mins of IMT activation	Incident Log
	AMSA activation	Verbal notification/activation of AMSA within 60 mins of IMT activation	Incident log
	IMTRP	Complete regulatory notification within designated timeframes	Incident log
	Jacobs activation	Verbal notification/activation of Jacobs within 6 hours of IMT activation	Incident log
Overall spill response	Spill response activities selected on basis of a Net Environmental Benefit Analysis (NEBA) (Incident Management Team Response Plan JS-70-PLN-F-00008)	NEBA undertaken every operational period and considered in development of following period Incident Action Plan.	Incident log
	Stag Field Operations OPEP (GF-70-PLN-I-00009) provides for NEBA, notifications and consultation requirements to ensure net environmental benefit from response	NEBA undertaken every operational period and considered in development of following period Incident Action Plan.	Incident log
		OPEP activated as per OPEP notification table	Incident log
	Jadestone Energy Incident Management Team Response Plan (JS-	Jadestone IMT comply with Jadestone Energy Incident Management Team Response Plan (JS-70-PLN-F-00008)	Incident log

Response Element	Control Measures	Performance Standards	Measurement Criteria
	70-PLN-F-00008) procedure details IMT Core team members, resource pool and responsibilities		
	Vessels comply with MARPOL and protected area sewage disposal requirements	Vessel sewage disposal will meet MARPOL Annex IV requirements. If vessel activities occur within protected areas, discharges will meet marine park management plan requirements and the DoT sewage strategy ⁹	Vessel checklist or other confirmation from vessel master that requirements will be met
	Vessels comply with MARPOL requirements for oily water (bilge) discharges	Vessel oily water disposal will meet MARPOL Annex I requirements.	
	Consultation undertaken in accordance with Jadestone Energy Consultation of Relevant Persons Procedure (JS-70-PR-I-00034) prior to deployment in populated areas	Consultation is undertaken with relevant stakeholders prior to deployment of resources to townships and marine/coastal areas.	Consultation records
	Localised Risk Management Assessment undertaken to minimise potential impacts on populated areas	A Risk Management Assessment is undertaken prior to large scale deployment to populated areas	Risk Management Assessment
Source Control	Shipboard Oil Pollution Emergency Plan (SOPEP)	SOPEP activated within 60 minutes of spill incident	Incident Log

⁹ <http://www.transport.wa.gov.au/mediaFiles/marine/MAC-IS-SewageStrategy.pdf>

Response Element	Control Measures	Performance Standards	Measurement Criteria
	Jadestone’s Stag Incident Response Plan (GF-00-PR-F-00041)	Stag Incident Response Plan activated within 60 minutes of spill incident	Incident Log
Operational monitoring	Operational Monitoring Plan	Activate Operational Monitoring Action Plan within 60 minutes of IMT activation	Incident Log
	Vessel Surveillance	Vessel Surveillance initiated within 120 minutes following request from IMT	Incident log
		Observation reports submitted to IMT within 60 mins of completing surveillance	Incident log
	Aerial Surveillance	Aerial Surveillance initiated within 6 hours following request from IMT	Incident log
		Two passes per day of spill area by observation aircraft provided from Day 1 of response	Incident log
		Trained Aerial Observers supplied within 48 hours of notification	Incident log
		Flight schedules are maintained throughout response	Incident Action Plan
		Observers completed aerial surveillance observer log following completion of flight	Aerial Observer Logs
		Aerial surveillance continues until termination criteria are met	Incident log
		Tracking Buoys	Tracking buoys deployment to be initiated within one hour of spill notification from On-Scene Commander or Operations Lead, subject to vessel availability and weather conditions is to be initiated within one hour of spill notification
	Tracking buoys utilised until termination criteria met		Incident log
	Satellite Imagery	Satellite imagery commissioned within 6 hours of a Level 2 spill notification	Incident Log
		Satellite imagery delivered to IMT within 24 hours of request to service provider	Incident Log
		Satellite imagery continues until termination criteria are met.	Incident Log
	Oil Spill Modelling	Oil Spill modelling commissioned within 24 hours for a Level 2 spill confirmation	Incident Log
		OSTM to commence within approximately three hours of request submission	Incident Log
		Modelling delivered to IMT within 2 hours of request to service provider	Incident Log

Response Element	Control Measures	Performance Standards	Measurement Criteria
		Modelling continues until termination criteria are met	Incident Log
	Fluorometry	Jadestone will conduct in-field efficacy testing in accordance with the Special Monitoring of Applied Response Technologies (SMART) monitoring protocol (NOAA, 2006)	Incident Log
		Visual monitoring surveys of dispersant effectiveness conducted from initial dispersant application	Incident Log
		Fluorometry surveys mobilised within 2 days of initiation	Incident Log
		Daily report including fluorometry results provided to IMT within 24 hours of completing daily survey	Incident Log
		SCAT	Commence deployment of SCAT Teams within 48 hours of becoming aware of potential impacts to shorelines
	Completed SCAT surveys are delivered to IMT within two hours of the Survey Team returning to its operating base		Incident Log
	SCAT surveys undertaken daily at priority locations		Incident Log
	Chemical Dispersion	Chemical Dispersion Action Plan (Surface)	NEBA undertaken within two hours of spill and daily thereafter to determine if chemical dispersion will have a net environmental benefit. NEBA is to be included in development of following period Incident Action Plan
Activate Chemical Dispersant Action Plan within one hour of NEBA demonstrating that dispersant application is likely to result in a net environmental benefit			Incident Log
A pre-deployment operational assessment of dispersant application location, dosage and equipment use is undertaken			Incident Log/ IAP
The NEBA for dispersant application will consider the following inputs: <ul style="list-style-type: none"> Trajectory of spill and sensitive receptors within EMBA Dispersant efficacy testing (when available) Forecast spill modelling of naturally and chemically dispersed oil Consultation with the DoT (HMA) 			Incident Log

Response Element	Control Measures	Performance Standards	Measurement Criteria
		At no time, can chemical dispersant be applied: <ul style="list-style-type: none"> • In waters shallower than 20 m (LAT); • Within 10 km of water shallower than 20 m; • Within restricted zones for offshore facilities; • Within a Marine Park boundary or its buffer; or • Within State Waters unless approved by the HMA. 	Incident Log
		Develop a Surface Dispersant Application Plan (IAP Sub-Plan) within 12 hours of NEBA confirming an overall environmental benefit	Incident Log
		Commence mobilisation of resources (equipment, stock, platforms) to support dispersant operations within four hours of Chemical Dispersant Action Plan being activated	Incident Log
		Aerial chemical dispersant application will be available for operation within 18 hours of initial AMOSC notification (daylight and weather condition dependent)	Incident Log
		If dispersant application is approved by the Incident Commander, a test spray will be conducted to assess dispersant effectiveness	Incident Log
		Prioritise the mobilisation and application of dispersants Dasic Slickgone NS and Corexit 9500 prior to other dispersant types	Incident Log
		Chemical dispersant applied in consultation with relevant statutory agencies and HMA	Incident Log
		AMOSC, in consultation with IMT to complete an Air Operations Plan and submit to AMSA within 12 hours of initial activation to enable activation of the FWADC	Incident Log Air Operations Plan
		The effectiveness of the aerial based chemical dispersion strategy is communicated to the Operations Lead via the Air-Attack Supervisor	Incident Log
		Response to continue until NEBA demonstrates no environmental benefit to use chemical dispersants	Incident Log

Response Element	Control Measures	Performance Standards	Measurement Criteria
Offshore Containment and Recovery (C&R)	Containment and Recovery Action Plan	NEBA undertaken within two hours of spill and daily thereafter to determine if containment and recovery will have a net environmental benefit. NEBA is to be included in development of following period Incident Action Plan	Incident Log
		Activate Containment and Recovery Action Plan within one hour of NEBA demonstrating that containment and recovery is likely to result in a net environmental benefit	Incident Log
		Develop a Containment and Recovery Plan (IAP Sub-Plan) within 12 hours of NEBA confirming an overall environmental benefit	Incident Log
		Commence mobilisation of personnel, equipment and vessels within six hours of Containment and Recovery Action Plan being activated	Incident Log
		Commence C&R operations within 24-36 hours of Containment and Recovery Action Plan being activated	Incident Log
		Containment and recovery operations to be managed by a minimum of two trained Oil Spill Responders (per system)	Incident Log
		Review waste management options for C&R within 24 hours of Containment and Recovery Action Plan being activated	Incident Log
		Obtain approvals from relevant Jurisdictional Authority prior to commencing decanting operations	Incident Log
		Oily water collected during offshore containment and recovery to be decanted (if approved) behind boom	Incident Log
		Vessels to maintain minimal lighting required for safety and navigation requirements	Incident Log
		Response vessels compliant with EPBC Act Regulation 8 (cetacean interactions) (Stag Marine Facility Operating Manual GF-90-MN-G-00038, Aviation Procedure JS-83-PR-G-00010)	Incident Log
Offshore equipment wash-down confined to hotzone	Incident Log		

Response Element	Control Measures	Performance Standards	Measurement Criteria
Shoreline Protection and Deflection	Shoreline Protection and Deflection Action Plan	NEBA undertaken within two hours of spill and daily thereafter to determine if Protection and Deflection will have a net environmental benefit. NEBA is to be included in development of following period Incident Action Plan	Incident Log
		Activate Protection and Deflection Action Plan within one hour of NEBA demonstrating that protection and deflection is likely to result in a net environmental benefit	Incident Log
		IMT to confirm priority receptors in consultation with the Control Agency	Incident Log
		Develop a P&D Plan (IAP Sub-Plan) (if required) within 12 hours of NEBA confirming an overall environmental benefit	Incident Log
		Obtain regulatory approvals to access locations for P&D operations within 3 days of spill or 48 hours prior to estimated contact with shoreline environment	Incident Log
		Commence deployment of personnel, equipment and vessels within 24 hours of completion of Protection and Deflection Plan (IAP Sub-Plan)	Incident Log
		Use shallow draft vessels for shoreline and nearshore operations to reduce seabed disturbances	Incident Log
		Establish demarcation zones for vessel, boom and skimmer usage	Incident Log
		Nearshore booming and skimming operations conducted during daylight hours only to minimise impacts from light emissions	Incident Log
Shoreline Clean-up	Shoreline Clean-up Action Plan	NEBA undertaken within two hours of spill and daily thereafter to determine if Shoreline Clean-up will have a net environmental benefit. NEBA is to be included in development of following period Incident Action Plan	Incident Log
		Activate Shoreline Clean-up Action Plan within one hour of NEBA demonstrating that clean-up is likely to result in a net environmental benefit	Incident Log
		IMT to confirm priority receptors in consultation with the Control Agency	Incident Log
		Develop a Shoreline Clean-up Plan within 12 hours of NEBA confirming an overall environmental benefit	Incident Log

Response Element	Control Measures	Performance Standards	Measurement Criteria
		Obtain regulatory approvals to access land within 3 days of spill or 48 hours prior to estimated contact with shoreline environment	Incident Log
		Commence deployment of personnel, equipment and vessels within 24 hours of completion of Shoreline Clean-up Plan (IAP Sub-Plan)	Incident Log
		Shoreline Team Lead to consult with SCAT Team and confirm shorelines for appropriate clean-up techniques prior to undertaking clean-up	Incident Log
		Selection of the shoreline clean-up technique appropriate to shoreline type is to be undertaken in consultation with the Control Agency and selected based on SCAT surveys and NEBA	Incident Log
		Shoreline clean-up team members are briefed by shoreline team leads on how to implement the shoreline clean-up techniques including how to prevent damage to shoreline habitat and surrounding laydown/staging areas	Operational Orders
		Clean-up activities in sensitive environments shall be conducted in front of the primary dune and crews will not access behind the primary dune	Incident Log
		Temporary waste storage on remote beaches should be located at the bottom of the primary dune and above the Highest Astronomical Tide (HAT) mark	Incident Log
		Clean-up strategies will be implemented under the direction of the HMA (where relevant)	Incident Log
		A shoreline/ nearshore habitat/ bathymetry assessment is conducted prior to nearshore activities	Incident Log
		Demarcation zones to be established for shoreline operations involving vehicle and personnel movement considering vegetation, bird nesting/roosting areas and turtle nesting timeframes	Incident Log
		Operational restriction of vehicle and personnel movement to limit erosion, compaction and disturbance to birdlife	Incident Log
		Access plans for shoreline operations will prioritise use of existing roads and tracks	Incident Log

Response Element	Control Measures	Performance Standards	Measurement Criteria
		Terrestrial vehicle and equipment deployment via landing barges where there is no existing track access	Incident Log
		A Specialist Advisor is consulted if shoreline operations overlap with areas of cultural or heritage significance.	Incident Log
		Vehicles and equipment are verified as clean and invasive species free prior to deployment to site	Incident Log
		Onshore equipment wash-down occurs in a decontamination area	Incident Log
		Booms are used for containment of shoreline flushing liquids if contaminated flushing has potential to cause secondary impacts in excess of oil dispersion into ocean	Incident Log
		Shoreline team leads shall verify clean-up effectiveness and conduct final evaluations in consultation with SCAT Teams	Incident Log
Oiled Wildlife Response (OWR)	Oiled Wildlife Response Action Plan	NEBA undertaken within two hours of spill and daily thereafter to determine if OWR will have a net environmental benefit. NEBA is to be included in development of following period Incident Action Plan	Incident Log
		Activate OWR Action Plan within one hour of NEBA demonstrating that OWR is likely to result in a net environmental benefit	Incident Log
		OWR undertaken in accordance with the WA Oiled Wildlife Response Plans and the Regional Oiled Wildlife Response Plans	Incident log
		Establish OWR structure within IMT within 24 hours of OWR risk being identified	Incident Log
		Stand-up OWR capability within 48 hours of OWR risk being identified, and offshore within seven days	Incident Log
		Commence mobilisation of OWR resources within 48 hours of OWR risk being identified	Incident Log
		Prepare IAP oiled wildlife response sub-plan within 12 hours of wildlife reconnaissance confirming potential or realised impacts to wildlife	Incident Log

Response Element	Control Measures	Performance Standards	Measurement Criteria
Waste Management	Waste Management Plan	Activate Waste Management Plan within 12 hours of IMT identifying waste management requirements for any response strategy	Incident Log
		Request to stand up Waste Contractor to arrange waste pickup and transport undertaken immediately following assessment of need for waste management in the response	Incident Log
		All decisions to escalate and de-escalate waste management equipment and personnel shall be approved by the IMT Leader	Incident log
		The IAP process is to be used to determine the required level of response and the quantities and types of waste management equipment required	IAP
		All waste associated with oiled wildlife response disposed of in accordance with the WAOWRP	Incident log
		DoT OSCP 2015 Waste Management Sub-Plan Guidance considered as part of the Waste Management Plan – Oil Spill Response Support (JS-70-PR-I-00037)	IAP
		All waste associated with oil spill response activity transported and disposed of in accordance with Environmental Protection (Controlled Waste) Regulations 2004, EP Act 1986 and associated regulations	Waste tracking records
		Compliance with local government municipal waste requirements	Waste consignment records
		Offshore inductions include municipal waste requirements (how to manage domestic waste)	Incident log
		Reduce/ Reuse/ Recycle assessment of collected waste conducted by waste contractor	Waste contractor records
		The Waste Management Operations Team Leader shall communicate daily reports to the Logistics Team Leader to inform of required resources and response effectiveness	Incident Log
		The Logistics Lead shall monitor and record the response to demonstrate all waste management legislative requirements are met	Incident Log
		Demobilisation of the Waste Management Plan will be guided by the IAP	Incident Log

Response Element	Control Measures	Performance Standards	Measurement Criteria
		Waste contractor shall track all wastes from point of generation (Warm-zones and Marinas) to final destination.	Waste contractor records
Scientific Monitoring	Scientific Monitoring Plan (GF-70-PR-I-00035)	Activate Scientific Monitoring Action Plan within 12 hours of Level 2 confirmation	Incident Log
	Competency and Training Management System [JS-60-PR-Q-00015]	Planning Team Lead has the competency to undertake coordination role with environmental service provider	Skills matrix and annual audit of Competency and Training Management system.
Activation of IMT	Competency and Training Management System [JS-60-PR-Q-00014]	IMT members are competent to undertake IMT role as defined by the Competency and Training Management System	Skills matrix and annual audit of Competency and Training Management system.
	Incident Management Team Response Plan [JS-70-PLN-F-00008]	IMT members available for an initial IMT assessment briefing within 30 minutes of receiving the activation notification	Incident Log
		IMT members located in Perth will meet physically at the office within 3 hours of receiving the activation notification	Incident Log

PART B – RESPONSE

17. INITIAL INCIDENT ACTION PLANS

In the event of a spill:

- Define the spill level (as per Appendix A of the Jadestone Incident Management Team Response Plan (IMTRP) (JS-70-PLN-F-00008))

Activate Incident Action Plan for the first 48-hour operational period:

- Section 1 for Level 1 spills; or
- Section 1 for Level 2 spills.

17.1 Level 1 Initial Incident Action Plan

LEVEL 1 SPILL INITIAL INCIDENT ACTION PLAN	Operational Period: First 48 Hours
Objectives for operational period:	<ol style="list-style-type: none"> Gain control of the spill source (stop or minimise further loss) Build and maintain situational awareness
Protection Priorities:	Spill Response Strategies:
<ul style="list-style-type: none"> N/A 	<ol style="list-style-type: none"> Source control Operational monitoring

LEVEL 1 SPILL: INITIAL IAP		Operational Period: First 48 Hours		
Timeframe (Within)	Strategies and timeframe	Tactics (what is to be done)	Task guidance (ref.)	
			Appendix A IMTRP	OPEP
30 mins	Activate the Notifications	Verbal and written notifications	Section 4.2	Appendix A6
60 mins	Activate source control – vessel	Shipboard Oil Pollution Emergency Plan (SOPEP) Jadestone’s Stag Incident Response Plan (Offshore component) (GF-00-PR-F-00041)	-	Section 80
60 mins	Activate operational monitoring to confirm floating oil location and extent, and to confirm spill level and form development of IAP.	Surveillance from tanker / platform	-	Section 9.4

17.2 Level 2 Initial Incident Action Plan

LEVEL 2 SPILL INITIAL INCIDENT ACTION PLAN		Operational period: First 48 Hours	
Objectives for operational period		<ol style="list-style-type: none"> 1. Gain control of spill source (stop or minimise further loss) 2. Build and maintain situational awareness 3. Prevent or minimise oiling of Protection Priorities 	
Protection Priorities:		Spill Response Strategies:	
<ul style="list-style-type: none"> • Dampier Archipelago; • Montebello Islands; • Lowendal Islands; • Barrow Island; and • Eighty Mile Beach. 		<ol style="list-style-type: none"> 1. Source control 2. Operational monitoring 3. Surface chemical dispersion 4. Containment and recovery 5. Nearshore protection and deflection 6. Shoreline clean-up 7. Oiled wildlife response 8. Scientific monitoring 	

LEVEL 2 SPILL: INITIAL IAP		Operational period: First 48 Hours		
Timeframe (Within)	Strategies and timeframe	Tactics (what is to be done)	Task guidance (ref.)	
			IMTRP	OPEP
30 mins	Activate the Notifications	Verbal and written notifications	Appendix A IMTRP (Section 4.2)	Appendix A6
60 mins	Activate Source Control – vessel or platform release	Shipboard Oil Pollution Emergency Plan (SOPEP) Jadestone’s Stag Incident Response Plan (Offshore component) (GF-00-PR-F-00041)	-	Section 0
Within 60 mins of IMT activation	Activate Operational Monitoring Action Plan	Deployment of resources to build and maintain situational awareness	-	Section 9.4
Within 1 hour of NEBA demonstrating that protection and deflection is likely to result in a net environmental benefit	Activate Surface Chemical Dispersion Action Plan	Mobilisation and deployment of vessel/aerial dispersant equipment, dispersant stockpiles and resources to reduce the volume of oil on the sensitivities (shoreline and surface) and reduce waste generated	-	Section 10
Within 1 hour of NEBA demonstrating that	Activate Containment and Recovery Action Plan	Mobilisation and deployment of vessels, personnel and equipment to	-	Section 11

LEVEL 2 SPILL: INITIAL IAP		Operational period: First 48 Hours		
Timeframe (Within)	Strategies and timeframe	Tactics (what is to be done)	Task guidance (ref.)	
			IMTRP	OPEP
protection and deflection is likely to result in a net environmental benefit		reduce volume of oil contacting sensitivities		
Within 1 hour of NEBA demonstrating that protection and deflection is likely to result in a net environmental benefit	Activate the nearshore Protection and Deflection Strategy Action Plan	Booming configurations to protect sensitivities or deflect oil away from sensitivities	-	Section 12
12 hours	Activate Scientific Monitoring Plan	Scientific monitoring plans to be conducted throughout spill response activities as directed by ongoing IAPs.	Section 8	-
Within 1 hour of NEBA demonstrating that clean-up is likely to result in a net environmental benefit	Activate the Shoreline Clean-Up Strategy Action Plan	Shoreline assessment and selection of suitable clean-up techniques for sensitivities Deployment of personnel and resources to clean-up impact locations	-	Section 13
24 hours	Activate the Oiled Wildlife Response Action Plan	Mobilisation of support and resources to manage and coordinate oiled wildlife response operations	-	Section 14
12 hours	Activate the Waste Management Plan to prepare for managing waste, and safe treatment and disposal of oily contaminated materials	Activation of initial waste collection, storage, and transport options.	Section 9	-
As the situation dictates	Commence transition to pro-active incident management by the IAP process.	Develop IAPs for subsequent operational periods. Document 'Performance Objectives' and 'Measurement Criteria' against actions in IAPs, and feed performance data into the development of subsequent IAPs. Manage the response documentation and records to ensure sufficient information is available to post-incident cost recovery and litigation processes.	Section 6	-

LEVEL 2 SPILL: INITIAL IAP		Operational period: First 48 Hours		
Timeframe (Within)	Strategies and timeframe	Tactics (what is to be done)	Task guidance (ref.)	
			IMTRP	OPEP
		Transition to Incident Management Team Response Plan (JS-70-PLN-F-00008).		

17.3 Notification and Activation

ACTION PLAN: INITIAL NOTIFICATIONS & ACTIVATIONS			
Aim: To provide early notification (and activation if required) to essential support organisations & regulatory agencies.			
Task	Actions	Resources	Timeframe
1. Contact and provide incident information to support and regulatory organisations Responsible Person: IMT Leader to delegate task			
Note: - Notification and/or activation of these support organisations is to be clearly annotated in the IMT Incident Log, additionally, all associated contracts/forms are to be filed. - To reduce confusion, IMT (Log or Ops) is to assume PRIMARY point of contact with AMOSC and AMSA - if resources are required			
INITIAL RESPONSE ACTIONS	Initial Response (Support Organisations) IMT Leader to direct designated IMT staff to conduct “initial” notifications to relevant support organisations.	Australian Marine Oil Spill Centre (AMOSC) <u>Verbal</u> Call AMOSC Duty Officer and provide initial incident notification. An initial call should be completed as soon as possible so that AMOSC can start their own internal preparations for activation. This initial call can be followed up once more information is known and a decision has been made as to what spill response equipment / personnel are going to be required. <u>Signed Contract Note</u> After verbal notification AMOSC will email a copy of Contract Note which will formalise activation. The CN must be signed by an authorised member of staff and returned to AMOSC. Note: may also include requirement to access SFRT (see Source Control)	For all - Contact details as per Jadestone Incident Management Contact List: 24hr Phone: 0438 379 328 Office Phone : (03) 5272 1555 Email: amosc@amosc.com.au Jadestone call out authorities to AMOSC are the following: <ul style="list-style-type: none"> • Country Manager (Australia); • Operations Manager (Australia); • Finance Manager (Australia); • Maintenance & Engineering Manager; and • Incident Management Team (IMT) Leader.
			ASAP (< 60mins)

		<p>Australian Marine Safety Authority (AMSA)</p> <p><u>Verbal</u></p> <p>Call AMSA and provide initial incident notification.</p> <p>An initial call should be completed as soon as possible for two reasons:</p> <ul style="list-style-type: none"> a) Incident notification; and b) So that Jadestone can request mobilisation of AMSA resources as quickly as possible. <p>This initial call is to be followed up with a written POLREP</p>	<p>Primary contact (Canberra)</p> <p>1800-641-792</p> <p>(02) 6230-6811</p>	<p>ASAP</p> <p>(< 60 mins)</p>
ONGOING RESPONSE ACTIONS	<p>Notification of Regulatory Organisations</p> <p>IMT Leader to direct IMT staff to complete required regulatory/compliance notifications.</p>	<p>Complete all relevant verbal and written regulatory notifications listed in Appendix A6 – Regulatory Notifications</p>	<p>Appendix A6 – Regulatory Notifications</p>	<p>To be commenced as soon as practicable, and no later than 2 hours of spill occurring</p>
	<p>Secondary Response (Support Organisations)</p> <p>IMT Leader to direct designated IMT staff to conduct notification/activation of secondary support organisations</p>	<p>Scientific Monitoring Programme</p> <p>Call to be made to Scientific monitoring service provider providing them with information relating to the incident and intention with respect to activation of the SMP.</p> <p>Call is to be followed up with written confirmation</p> <p>Waste Management Contractor (Oil Spill Response Waste Management Plan)</p>	<p><u>Refer IMT Contact List</u></p> <p>24 hr Contact details</p> <p>Contact details as per Jadestone Incident Management Contact List</p>	<p>Scientific monitoring service provider: within 6 hours of spill notification</p> <p>Waste management contractor: within 12 hours of spill notification</p>

17.4 Source Control Action Plan

ACTION PLAN: SOURCE CONTROL		
1. Commence initial response actions		
Responsible Person: OIM /IMT Leader (to delegate)		
Task	Resources	Timeframe
INITIAL RESPONSE ACTIONS	<p>The following actions will be undertaken as an initial response to the relevant <u>source</u> control incident:</p> <p>Vessel spills:</p> <ul style="list-style-type: none"> Vessel to undertake initial response actions as per their SOPEP. <p>Facility spills</p> <ul style="list-style-type: none"> Implement Stag Incident Response Plan (GF-00_PR-F-00041). <p>Considerations:</p> <p>Isolate spill (if possible) and prevent spill to the marine environment; Recover spilt hydrocarbons on Facility using spill kits; Isolate and repair damaged equipment.</p> <p>Pipeline leak</p> <ul style="list-style-type: none"> Implement Stag Incident Response Plan (GF-00_PR-F-00041). 	<p>Shipboard Oil Pollution Emergency Plan (SOPEP)</p> <p>Stag Incident Response Plan (GF-00_PR-F-00041)</p> <p>Immediately</p>

17.5 Operational Monitoring Plan

ACTION PLAN: MONITOR AND EVALUATE				
Aim: To build and maintain the most accurate picture regarding the spill and oil lost into the marine environment in the most effective and efficient manner				
Task	Actions	Resources	Timeframe	
1. Deployment of satellite tracking buoy (TB) Responsible Person: OIM / IMT (Planning)				
INITIAL RESPONSE ACTIONS	Deploy and access tracking buoy information OIM to direct crew to deploy buoy from the facility or a vessel as close as is safe to the leading edge of the spill.	<ol style="list-style-type: none"> OIM (or Rep) to report to IMT as soon as TB has been deployed OIM (or Rep) to provide IMT with current weather conditions at Stag (wind, sea state, current direction) – IMT to log information and add to Common Operating Picture (COP) IMT to confirm deployment via TB website using associated login information (ensure IMT Leader is briefed). Refer IMT OneNote for Login details for Tracker Buoys. IMT to ensure TB location is added to the COP IMT to ensure deployment of TB is captured in Incident Log <p><u>Note:</u> Buoys are not to be dropped from a height of greater than 10m to water surface.</p>	Satellite tracking buoys – Stag Facility Support vessel if available	Deploy within 1 hour of spill (subject to vessel availability and weather conditions) and continually track thereafter
ONGOING ACTIONS	Deployment of additional tracking buoy OIM/Vessel Masters to liaise with IMT with respect to the continued deployment of TB.	<ol style="list-style-type: none"> As part the ongoing response the IAP is to include guidance to the OIM (of vessels) with respect to the continued deployment of available TB in support of operational monitoring of the spill Deployed TB are to be continually monitored by the IMT (Planning) and added to the COP as a regular action Deployment of the TB’s to captured in Incident Log 	Incident Action Plan (IAP)	As detailed within the IAP
2. Commencement of aerial surveillance operations (for Level 2 spills) Responsible Person: OIM / IMT				

INITIAL RESPONSE ACTIONS	<p>Activation of initial aerial surveillance flights</p> <p>Source and mobilise available aircraft to commence aerial surveillance of the spill</p>	<ol style="list-style-type: none"> 1. IMT (Log) to contact aviation provider to confirm availability of a helicopter to conduct an initial surveillance flights in vicinity of the spill <ol style="list-style-type: none"> a. Confirm approx. time flight can depart (or be re-tasked) b. Confirm crew composition – likely a trained observer will not be available. Flight can be conducted using a standard crew and should be flown as soon as practicable. 2. IMT (Plan or Ops) to contact AMOSC (requesting assistance with sourcing trained observers) 3. IMT (Ops) to liaise with the OIM regarding approval to commence surveillance flight in vicinity of the facility 4. IMT (Log/Ops) – once aircraft and crew have been confirmed, IMT Leader is to be updated. 5. IMT (Ops) ensure flight details are captured in the incident log (all details pertaining to the flight) 6. IMT (Ops) to assume primary coordination for flight. Provide with tasking information 7. IMT (Ops) to contact aviation provider and confirm that all safety requirements have been met. Capture in incident log. 8. IMT (Ops) to monitor flight with aviation provider ensuring that the IMT are briefed regularly. Once complete ensure that all relevant information is provided back to the IMT so that it can be assessed, included into the COP and further flights determined. 9. All information should be entered into an Aerial Surveillance Observation Log (refer Appendix A1) which will be sent to the OIM/IMT within an hour of the aircraft returning to its operating base. Where possible, a verbal report via radio/telephone en-route providing relevant information should be considered if the aircraft has long transits from the spill location to base. 	<p>Equipment</p> <p>helicopters</p> <p>Jadestone aviation contract - fixed wing aircraft</p> <p>Personnel</p> <p>1 x Trained Aerial Observer (sourced from AMOSC, AMSA). Note: Initial reconnaissance may be completed by an untrained observer while waiting for trained observers to arrive.</p> <p>Forms and Guidance</p> <p>Aerial Surveillance Tasking Form</p> <p>Aerial Surveillance Observation Log (refer Appendix A1)</p> <p>Aerial Surveillance Marine Fauna Sighting Record Sheet (refer Appendix A1)</p> <p>Deliverables</p> <p>Completed Aerial and Fauna Surveillance Forms</p> <p>Photographs / video footage</p>	<p>Mobilisation of initial surveillance within 6 hours of spill notification</p> <p>(At least 1 aircraft available at airbase within 24 hours of mobilisation request)</p> <p>Trained aerial observers within 48 hours of notification</p>
	<p>Source and mobilise available aircraft to commence aerial surveillance of the spill</p>			

ACTION PLAN: MONITOR AND EVALUATE			
		<p>10. Aerial Observers shall note fauna sightings in the Aerial Surveillance Marine Fauna Sighting Record Sheet. The location and details of each sighting should be recorded with a cross-reference to photographic imagery captured. The Aerial Surveillance Marine Fauna Sighting Record Sheet is provided in Appendix A1.</p> <p>Note: if Offshore Support Vessel (OSV) is onsite and tasked to commence dispersant operations all surveillance flights are to be tasked to provide updates of spill location when operating in the same operational zone</p>	

ACTION PLAN: MONITOR AND EVALUATE				
ONGOING RESPONSE ACTIONS	<p>Ongoing coordination of aerial surveillance flights</p> <p>Development and coordination of surveillance flights</p> <p>Note: Coordination of aviation operations is essential. Therefore, flight-schedule is to cover all planned aviation operations on a daily basis.</p>	<p>IMT (Ops) to develop a flight schedule for ongoing surveillance as required:</p> <ol style="list-style-type: none"> 1. Source fixed wing aircraft from Jadestone aviation contractor to commence aerial surveillance operations from Day 2 <p>Note: A second fixed wing aircraft will be requested from Jadestone aviation contractor to support aerial dispersant operations from Day 2</p> <ol style="list-style-type: none"> 2. Develop aerial surveillance flight schedule which includes the following operations: <ol style="list-style-type: none"> a. Aerial surveillance utilising helicopters - Day 1 b. Aerial surveillance using fixed wing from Karratha – Day 2 onwards c. Aerial dispersant operations from Karratha d. Aerial Spotter flights in support of the dispersant application (if required) 3. The frequency of flights will be sufficient to ensure that the information collected during each flight (i.e. observer log and spill mapping) meets the information needs to validate dispersion of the spill and supports ongoing response operations 4. Flight schedule is to ensure that all aircraft operations are conducted safely and support “other” response operations where necessary 5. Aerial surveillance to continue daily until termination criteria are met 	<p>Incident Action Plan (IAP)</p>	<p>As per operational period</p>

ACTION PLAN: MONITOR AND EVALUATE				
3. Commencement satellite imagery acquisition (for Level 2) Responsible Person: IMT (Planning)				
INITIAL RESPONSE ACTIONS	Provision of satellite imagery to the IMT Mobilise KSAT (through AMOSC) to produce daily satellite images	<ol style="list-style-type: none"> 1. IMT (Planning) to notify AMOSC Duty Officer to request initiation of satellite services via KSAT (OSRL subscription available as a secondary option) and provision of daily imagery 2. IMT (Planning) to combine satellite data with optical imagery (e.g. aerial surveillance, vessel-based observations) to mitigate issues these optical imagery results may present with angle of insolation, thick cloud cover and night <p>Ongoing Response Actions</p> <ol style="list-style-type: none"> 3. Request satellite imagery be provided daily throughout the duration of the response until termination criteria are met. Integrate data into COP. Receipt of all daily imagery is to be captured in the incident log. <p><u>Note:</u> Satellite data imagery will depend on satellite availability and location in orbit</p>	<p>AMOSC</p> Activation to be completed Contract note executed	Request within 6 hours of spill notification Satellite imagery delivered to IMT within 24 hours of request to service provider Daily data acquisition
		<p>Mobilisation of AMOSC resources needs to be coordinated across all response strategies where support is required.</p> <p>Deliverables</p> Daily satellite images		

ACTION PLAN: MONITOR AND EVALUATE

4. Oil spill trajectory modelling (OSTM)

Responsible Person: IMT (Planning)

INITIAL RESPONSE ACTIONS	<p>Provision of OSTM to the IMT Mobilise RPS APASA via AMOSC to produce three day forecast model outputs.</p>	<ol style="list-style-type: none"> 1. IMT (Plan) to contact AMOSC and arrange for oil spill trajectory modelling to be provided. Will require completion of the RPS spill modelling request form. 2. IMT (Plan) update incident log with request for OSTM and estimated time of delivery. 3. Provide RPS with data from aerial surveillance so that they can verify and adjust fate predictions of the spill and improve predictive accuracy. <p>Ongoing Response Actions</p> <ol style="list-style-type: none"> 4. IMT (Plan) to request ongoing OSTM to be provided on a daily basis. To ensure that COP is updated when provided. Receipt of all daily OSTM is to be captured in the incident log. 5. OSTM to continue daily until termination criteria are met 	<p>Forms and Guidance RPS trajectory modelling request form in One Note Email: Response@apasa.com.au Mobile: 0407 477 196</p> <p>Deliverables OSTM three day forecast outputs daily</p>	<p>Contact AMOSC within 24 hours of spill notification OSTM to commence within approximately three hours of request submission Repeat as required</p>
	<p>Provision of OSTM to the IMT Mobilise RPS APASA via AMOSC to produce three day forecast model outputs.</p>	<ol style="list-style-type: none"> 1. IMT (Plan) to contact AMOSC and arrange for oil spill trajectory modelling to be provided. Will require completion of the RPS spill modelling request form. 2. IMT (Plan) update incident log with request for OSTM and estimated time of delivery. 3. Provide RPS with data from aerial surveillance so that they can verify and adjust fate predictions of the spill and improve predictive accuracy. <p>Ongoing Response Actions</p> <ol style="list-style-type: none"> 4. IMT (Plan) to request ongoing OSTM to be provided on a daily basis. To ensure that COP is updated when provided. Receipt of all daily OSTM is to be captured in the incident log. 5. OSTM to continue daily until termination criteria are met 	<p>Forms and Guidance RPS trajectory modelling request form in One Note Email: Response@apasa.com.au Mobile: 0407 477 196</p> <p>Deliverables OSTM three day forecast outputs daily</p>	<p>Contact AMOSC within 24 hours of spill notification OSTM to commence within approximately three hours of request submission Repeat as required</p>

ACTION PLAN: MONITOR AND EVALUATE				
5. Vessel surveillance				
Responsible Person: OIM or IMT (Operations & Logistics)				
INITIAL RESPONSE ACTIONS	<p>Mobilisation of vessels to conduct surveillance</p> <p>Source and mobilise available vessels to commence surveillance of the spill</p>	<ol style="list-style-type: none"> 1. IMT (Ops & Log) to source available vessels to commence surveillance of the spill <ol style="list-style-type: none"> a) Contracted vessels b) Vessels of opportunity 2. IMT to liaise with OIM with respect to vessels operating in and around the facility 3. Vessels to be tasked to gather the following information about the spill: <ol style="list-style-type: none"> a) Location (latitude and longitude); b) Size and volume; c) Direction of movement; d) Visual appearance of the slick (colours, emulsification etc); e) Associated weather conditions in vicinity of the spill (wind speed/direction, sea state, swell); f) Any marine fauna or other activities observed; and g) Photographic images. 4. Vessel Master to provide information back to the IMT within 60 mins of completing surveillance: <ol style="list-style-type: none"> a) Complete Vessel Surveillance Observation Log b) Email completed logs to the IC within an hour of completion. Include photographs and GPS data where available. 	<p>Deliverables</p> <p>Completed Vessel Surveillance Observation Log and Marine Fauna Sighting Record Sheet (refer Appendix A1)</p> <p>Photographs / video footage</p>	<p>Vessel surveillance initiated within 120 minutes of spill notification</p> <p>Vessel surveillance reports submitted to IMT within 60 mins of completing surveillance</p>

ACTION PLAN: MONITOR AND EVALUATE				
6. Fluorometry Responsible Person: IMT (Planning & Logistics)				
	Mobilise fluorometry via scientific service provider and CSIRO	<ol style="list-style-type: none"> 1. IMT (Plan) to activate scientific services providers. To confirm what logistical requirements will be required to support. 2. IMT (Logistics) to discuss with Planning requirements. Action as required. 3. IMT (Plan) discuss need for additional fluorometers (multiple fluorometers are available from Monitoring Service Providers) 4. Scientific service provider to provide daily fluorometry results to IMT 	Personnel and equipment 1 x person trained to interpret data 2 x fluorometers Logistics Specific requirements to be discussed and confirmed with Monitoring Service Providers	Mobilised within 2 days of spill notification Fluorometry results provided to IMT within 24 hours of completion of daily survey
7. Shoreline and Coastal Habitat Assessment Responsible Person: IMT (Planning & Logistics)				
	Mobilisation of personnel to conduct Shoreline and Coastal Habitat Assessment Surveys Source and mobilise available personnel and equipment to commence shoreline and coastal habitat assessment	<ol style="list-style-type: none"> 1. IMT (Log) to contact AMOSC to confirm availability of personnel to conduct assessment surveys 2. IMT (Plan or Ops) to contact vessel and equipment providers to support assessment surveys 3. IMT (Ops) to arrange all safety requirements for shoreline assessment survey deployment. Capture in incident log. 4. IMT (Plan) to identify priority locations to deploy shoreline assessment survey teams by consulting the NEBA (e.g. location of priority receptors, seasonal presence) and existing operational monitoring data that will help confirm locations that will be/have been contacted by hydrocarbons. IMT (Ops) to mobilise Survey Teams to commence assessment surveys prior to shoreline contact to obtain pre-contact data, where possible	Equipment Vessels Aircraft Aerial survey equipment (e.g. UAVs) All-terrain vehicles Personnel Trained Personnel (sourced from AMOSC) Forms and Guidance Shoreline and Coastal Habitat Assessment Survey Form (refer Appendix A5) Deliverables Completed Shoreline and Coastal Habitat Assessment Survey Form Photographs / video footage	Commence deployment of SCAT Teams within 48 hours of becoming aware of potential impacts to shorelines

ACTION PLAN: MONITOR AND EVALUATE				
		<p>Note: Unmanned Aerial Vehicles (UAVs) may be necessary for some sensitive environments and where personnel safety is at risk (e.g. dangerous fauna in remote locations)</p>		
	<p>Commence Shoreline and Coastal Habitat Assessment Surveys</p>	<ol style="list-style-type: none"> 1. Undertake shoreline assessment (SCAT) ground / aerial survey (depending on access) and sampling as per AMSA / ITOPF / NOAA guidelines (included in Key References above): <ul style="list-style-type: none"> • Undertake pre-impact survey to obtain baseline information, where possible • Undertake post-impact survey to confirm: <ol style="list-style-type: none"> i) Levels of oil stranding; ii) Actual impacts to environmental sensitivities; iii) Priorities for clean-up; iv) Resources required to implement a clean-up operation; v) Appropriate cleaning methods according to shoreline conditions and oil loading, i.e.: <ol style="list-style-type: none"> (1) Natural recovery with monitoring; (2) Beach pre-cleaning; (3) Low pressure flushing; (4) Manual oil/sediment removal; and (5) Vacuum pumping. vi) Safe access locations. 2. Undertake routine surveys during shoreline clean-up operation to assess effectiveness of response. 3. IMT (Ops) to monitor assessment survey operations ensuring that the IMT are briefed regularly. Once initial surveys are complete ensure that all relevant information is provided back to the IMT so that it can be assessed, included into the COP and further surveys determined. 4. IMT to update IAP with survey information, as appropriate. 	<p>Equipment</p> <ul style="list-style-type: none"> Camera GPS Spades Tape measures Sampling equipment Vehicles (as required) Aerial survey equipment (e.g. Unmanned Aerial Vehicles (UAVs)) <p>Personnel</p> <ul style="list-style-type: none"> Trained Shoreline Assessment Team Leads (one per team) Team members (2 per team) <p>Forms / Guidance</p> <ul style="list-style-type: none"> Shoreline Assessment Ground Survey Shoreline Assessment Guideline – Ground Surveys AMSA / ITOPF / NOAA guidelines and forms Shoreline Clean-up Methods table (below) <p>Deliverables</p> <ul style="list-style-type: none"> Shoreline assessment survey reports Lab reports 	<p>Completed surveys sent to IMT within two hours of the Survey Team returning to its operating base</p>

ACTION PLAN: MONITOR AND EVALUATE				
		<p>5. All information should be entered into a Shoreline and Coastal Habitat Assessment Survey Form (refer Appendix A5) which will be sent to the IMT within two hours of the Survey Team returning to its operating base.</p> <p>Ongoing Response Actions</p> <p>6. IMT (Plan) to arrange for ongoing Shoreline and Coastal Habitat Assessment Surveys for priority locations to be provided on a daily basis. To ensure that COP is updated when provided. Receipt of all daily Survey Forms are to be captured in the Incident Log.</p>		

17.6 Surface Chemical Dispersant Action Plan

ACTION PLAN: DISPERSANT APPLICATION			
Task		Resources	Timeframe
<p>NOTE: WA DoT must approve of dispersant application prior to commencement in WA state waters. Also notify WA DoT if any dispersant applied in Commonwealth waters are likely to enter WA waters.</p>			
Task	Actions	Resources	Timeframe
<p>1. Mobilise dispersant resources Responsible Person: IMT (Logistics and Operations)</p>			
<p>Aim: To mobilise equipment and resources in support of dispersant operations</p>			

ACTION PLAN: DISPERSANT APPLICATION				
Task		Resources	Timeframe	
INITIAL RESPONSE ACTIONS	Conduct NEBA	<p>1. Conduct operational NEBA to determine if dispersant application is likely to result in a net environmental benefit.</p> <p>Considerations may include:</p> <ul style="list-style-type: none"> • Will the spill thickness be favourable for dispersant application? • Is the product too weathered for dispersants to be effective? • What Dispersant-to-Oil Ratio (DOR) is required for this strategy to be effective on this product? • What are the metocean conditions and how would this affect the DOR? • What dispersant types are most effective on the particular product spilt? • Will spraying adversely affect any sub-surface receptors? <p>The initial operational NEBA for dispersant application shall consider the following inputs:</p> <ol style="list-style-type: none"> a) Trajectory of spill and sensitive receptors within EMBA b) Forecast spill modelling of naturally and chemically dispersed oil c) Ecotoxicity data (species protection trigger levels) for dispersed oil (including chemically dispersed oil) (once available) d) Consultation with the HMA <p>Ongoing Actions</p> <p>Daily re-evaluation of NEBA to assess varying net benefits and impacts of continuing to apply dispersants and consideration of application rates, dilution rates and dispersant effectiveness. Dispersants should continue to be used until operational NEBA demonstrates net benefit is no longer being achieved through application.</p>	Operational NEBA form Planning Lead	<p>Within 2 hours of spill notification</p> <p>Daily NEBA re-evaluation</p>

ACTION PLAN: DISPERSANT APPLICATION			
Task		Resources	Timeframe
	<p>Develop Surface Dispersant Plan</p>	<p>Personnel Planning Lead / AMOSC to assist with development of Surface Dispersant Plan (IAP sub-plan)</p> <p>Deliverables Surface Dispersant Plan (IAP sub-plan)</p>	<p>Develop a plan, if required, within 12 hours of NEBA confirming an overall environmental benefit</p>
	<p>1. If NEBA indicates that there is an overall environmental benefit develop a Surface Dispersant Plan (IAP sub-plan) to include the following data:</p> <ul style="list-style-type: none"> a) Operational zones for application; b) Exclusion zones; c) Locations to deploy personnel and equipment; d) Frequency of application (sorties/day); e) List of resources (personnel and equipment) required; f) Logistics involved in deploying equipment and personnel; g) Timeframes to undertake deployment; h) Effectiveness monitoring; and i) Health and Safety constraints. <p>Note: All surface chemical dispersant operations will occur during daylight hours only.</p> <p>2. Dispersants Dasic Slickgone NS and Corexit 9500 shall be mobilised and applied prior to other dispersant types. If additional dispersant types are likely to be required, IMT shall prioritise the use of dispersants using the following criteria:</p> <ul style="list-style-type: none"> • Dispersant type listed as approved in the National Plan for Maritime Environmental Emergencies Register of Oil Spill Control Agents (OSCA); and • Jadestone’s Chemical Selection Evaluation and Approval Procedure (JS-70-PR-I-00033). 		

ACTION PLAN: DISPERSANT APPLICATION				
Task		Resources	Timeframe	
INITIAL RESPONSE ACTIONS	<p>Mobilise resources to support dispersant operations</p> <p>Commence mobilisation of all required resources to Karratha to support aerial dispersant operations</p>	<p><u>AMOSC Resources</u></p> <ol style="list-style-type: none"> 1. Contact AMOSC Duty Officer (once notification/activation has been completed) and discuss the following support: <ol style="list-style-type: none"> a) Access to and mobilisation of all AMOSC dispersant stocks and associated equipment into Karratha/Dampier (AMOSC will arrange through their contracted transport provider); b) Activation of the Fixed Wing Aerial Dispersant Capability (FWADC) from AMSA (AMOSC will activate this on behalf of Jadestone and assume operational control); and c) Provision of trained spill responders to support operations (AMOSC Staff and Core Group). 2. Ensure that all actions/details are captured in the Resource tracking and Incident log 3. Ensure wider IMT are briefed on actions <p>Ongoing Response Actions</p> <p>Following initial activation/mobilisation of support as detail above:</p> <ol style="list-style-type: none"> 4. Contact AMOSC Duty Officer and request update on all requested actions. 5. Ensure that all logs are updated based on revised information 	<p><u>AMOSC</u></p> <p>Activation to be completed Contract note executed</p> <p>Mobilisation of resources needs to be coordinated across all PRIMARY response strategies where support is required.</p> <p><u>Dispersant Stocks</u> – Refer to Table 10-2</p>	<p>Within 4 hours of spill notification</p>

ACTION PLAN: DISPERSANT APPLICATION			
Task		Resources	Timeframe
INITIAL RESPONSE ACTIONS	<p><u>AMSA Resources (via AMOSC)</u></p> <ol style="list-style-type: none"> Contact AMOSC and request mobilisation of dispersant stocks from all locations into Dampier/Karratha (will likely require Jadestone to make transport arrangements) Request AMOSC assistance with mobilisation of Air Attack Supervisors into Karratha (AMSA has responsibility for sourcing a suitable aircraft for Air Attack Supervisor. Jadestone to arrange logistical support if required) Ensure that all actions/details are captured in the <u>Resource tracking</u> and <u>Incident</u> log Ensure wider IMT are briefed on actions <p>Ongoing Response Actions</p> <p>Following initial activation/mobilisation of support as detail above:</p> <ol style="list-style-type: none"> Contact AMOSC Duty officer and request update on all requested actions. Ensure that ALL logs are updated based on revised information <p>Note: Aircraft requiring two pilots are not suitable for air attack operations as the Air Attack Supervisor function needs to be conducted from the co-pilot's seat.</p>	<p><u>AMSA</u></p> <p>Initial notification to be completed</p> <p>FWADC Aerial Dispersant Operations Plan For Marine Oil Spills Off The Western Australian Coastline (Air Ops Plan Template)</p> <p>Mobilisation of AMSA resources needs to be coordinated across all PRIMARY response strategies where support is required</p> <p>Dispersant Stocks – Refer to Table 10-2</p>	<p>Within 4 hours of spill notification</p>

ACTION PLAN: DISPERSANT APPLICATION				
Task		Resources		Timeframe
INITIAL RESPONSE ACTIONS	<p>Mobilise vessels and aircraft to support dispersant operations</p>	<p><u>Aerial dispersant mobilisation</u></p> <ol style="list-style-type: none"> 1. AMOSC, in consultation with the IMT prepare an Air Operations Plan in accordance with the Aerial Dispersant Operations Plan For Marine Oil Spills Off The Western Australian Coastline and submit to AMSA prior to commencement of any FWADC aircraft operations 2. Confirm progress of FWADC activation from AMSA following activation by AMOSC 3. Ensure in-field efficacy testing is conducted in accordance with the Special Monitoring of Applied Response Technologies (SMART) monitoring protocol (NOAA, 2006) 	<p>Aerial Dispersant Operations Plan For Marine Oil Spills Off The Western Australian Coastline—primary reference</p>	<p>Air Operations Plan submitted to AMSA within 6 hours of initial activation</p>
Ongoing Actions	<p>Activate Dampier logistic support arrangements</p>	<p><u>Logistics Yard (Dampier) activation</u></p> <ol style="list-style-type: none"> 1. Contact Logistics Yard (Dampier) and stand-up staff/facilities to support resource mobilisation. Provide relevant information regarding estimated arrival times/dates into Dampier once confirmed with service providers 2. Confirm all arrangements with respect to loading equipment/dispersant and embarking spill response personnel aboard vessels alongside Dampier. <p>Note: ALL other response equipment required will be coordinated from the Logistics Yard (Dampier) throughout the response.</p>	<p>Logistics Yard (Dampier)</p>	<p>Within 6 hours of spill notification</p>

Task	Resources	Timeframe
<p>2. Commence aerial dispersant application Responsible Person: IMT (Operations and Logistics)</p>		
<p>Ongoing Actions</p>	<p>Conduct of aerial dispersant operations Following initial activation/mobilisation of required resources ongoing operations are to be conducted in support of the response</p> <p><u>Aerial dispersant operations commencement</u></p> <ol style="list-style-type: none"> 1. Confirm status of Air Operations Plan implementation in consultation with AMOSC 2. Liaise with Western Australian Department of Transport prior to commencing aerial dispersant application in Commonwealth waters that could impact upon State waters 3. Upon agreement of suitability of Air Operations Plan from AMOSC commence aerial dispersant application 4. Air Attack Supervisors to ensure IMT Operations Lead is informed on effectiveness of surface aerial dispersant application 5. Confirm build-up of dispersant stocks at Karratha in accordance with the Dispersant Mobilisation Plan 6. Coordinate arrival and availability of additional aircraft as they arrive in Karratha in accordance with Dispersant Mobilisation Plan 7. Arrange and coordinate transport services to mobilise dispersant to Karratha airport 8. Support development of flight schedule (see Operational Monitoring Action Plan) to ensure inclusion of aerial dispersant operations and deconfliction from other planned operations (operational zones allocated) 9. Support ongoing coordination of aviation operations as response continues. <p>Note: Air Operations Plan and IAP must ensure the following restrictions are adhered to for dispersant application:</p> <ol style="list-style-type: none"> a) No application in waters shallower than 20 m; and b) No application within exclusion zones for offshore facilities; and 	<p>Air Operations Plan – to be implemented for Karratha</p> <p>Incident Action Plan (IAP) – Task Assignment to be developed and disseminated to commence vessel dispersant operations</p> <p>Daily Flight Schedule – for all aviation operations</p> <p>Dispersant Stocks – Refer to Table 10-2</p> <p>Commence air operations and dispersant application by Day 2</p>

		<ul style="list-style-type: none"> c) No application within an Australian Marine Park boundary or its buffer; and d) No application over in-field responders. <p>Clear guidance to be provided in IAP with respect to:</p> <ul style="list-style-type: none"> e) Focus on application to windrows / spots of surface slick which threaten priority environmental sensitivities. f) Conduct of visual monitoring to assess effectiveness after sorties g) Completion of dispersant application logs h) Daily reporting back to IMT on conduct of operations 		
--	--	--	--	--

17.7 Containment and Recovery Action Plan

ACTION PLAN: CONTAINMENT AND RECOVERY				
Task	Actions	Resources	Timeframe	
1. Mobilise containment and recovery resources Responsible Person: IMT (Logistics and Operations)				
Aim: To mobilise equipment and resources to Dampier in support of containment and recovery (C&R) operations				
INITIAL RESPONSE ACTIONS	Conduct NEBA	Conduct operational NEBA to determine if C&R is likely to result in a net environmental benefit. Operational NEBA considerations: <ul style="list-style-type: none"> • Are metocean conditions favourable for the available equipment? • Will the spill thickness be adequate for recovery? • Is decanting permitted? If not, how will waste volumes be managed? Ongoing Actions Daily re-evaluation of NEBA to assess varying net benefits and impacts of continuing to conduct C&R activities	Operational NEBA form Planning Lead	Within 2 hours of spill notification Daily NEBA re-evaluation
	Develop Containment and Recovery Plan	2. If NEBA indicates that there is an overall environmental benefit develop a Containment and Recovery Plan (IAP sub-plan) to include the following data: <ul style="list-style-type: none"> j) Operational zones; k) Locations to deploy personnel and equipment; l) List of resources (personnel and equipment) required; m) Logistics involved in deploying equipment and personnel; n) Timeframes to undertake deployment; o) Health and Safety constraints. 	Personnel Planning Lead / AMOSC to assist with development of Containment and Recovery Plan (IAP sub-plan) Deliverables Containment and Recovery Plan (IAP sub-plan)	Develop a plan, if required, within 12 hours of NEBA confirming an overall environmental benefit

ACTION PLAN: CONTAINMENT AND RECOVERY			
Task	Actions	Resources	Timeframe
<p>Mobilise containment and recovery resources IMT to commence mobilisation of C&R resources into Dampier</p>	<ol style="list-style-type: none"> 1. Arrange for mobilisation of C&R equipment to Dampier port <u>AMOSC/AMSA Resources</u> 2. Liaise with AMOSC / AMSA to commence mobilisation of containment and recovery equipment and personnel into Dampier 3. Ensure each vessel has a minimum of two trained personnel onboard who are responsible for controlling operations, ensuring they are implemented safely and effectively <p>Note: Ensure all equipment mobilisation is coordinated noting need for AMOSC/AMSA equipment in support of other response strategies</p> <ol style="list-style-type: none"> 4. Commence mobilisation of vessels to support C&R operations into Dampier <ol style="list-style-type: none"> a) Bhagwan Athos, AMS, Jetwave and Bhagwan will provide vessels under current Master Service Agreement (MSA) b) Additional vessels to be sourced through Jadestone approved broker 5. Mobilise waste management contractor and request all available IBCs and Iso-containers be sent to Dampier 6. Coordinate and activate arrangements to support loading and embarkation of equipment/personnel from Dampier port 7. Ensure that all actions/details are captured in the <u>resource tracking</u> and <u>Incident log</u> 8. Ensure wider IMT are briefed on actions 	<p>Equipment</p> <p>Vessels Booms, skimmers, ancillary equipment Waste storage</p> <p>Personnel</p> <p>Trained Personnel (sourced from AMOSC, AMSA) – 2 per vessel</p> <p>Forms and Guidance</p> <p>Vessel Mobilisation Guide – to be used to support sourcing of vessels into Dampier</p>	<p>Commence mobilisation within 12 hours of spill notification</p>

ONGOING RESPONSE OPERATIONS	<p>Commence containment and recovery operations</p> <p>Following initial activation/mobilisation of required resources ongoing operations are to be commenced in support of the response</p>	<p><u>Containment and Recovery operations commencement</u></p> <p><u>IMT (Log):</u></p> <ol style="list-style-type: none"> 1. Confirm build-up of C&R resources in Dampier 2. Coordinate arrival and availability of vessels in Dampier 3. Arrange and coordinate transport arrangements to mobilise equipment and personnel to Dampier port <p><u>IMT (Ops and Plan)</u></p> <ol style="list-style-type: none"> 4. Ensure additional vessels (once operationally ready) become available from Dampier are included in the IAP for each operational period. 5. Coordinate operational surveillance support to vessels to ensure they are being directed to priority locations 6. Assess daily operational surveillance information to drive future operational guidance 7. Coordinate vessel operations to support management of oily/water waste recovered by vessels 8. Support development and promulgation of the IAP to meet operational requirements 9. Coordinate daily operations in support of ongoing response 10. Ensure that all actions/details are captured in the <u>Resource tracking and Incident log</u> 11. Ensure wider IMT are briefed on actions on a daily basis <p>Note: Clear guidance to be provided in IAP with respect to:</p> <ul style="list-style-type: none"> - Vessel movements to/from port as required to assist with resupply/waste management/operational maintenance - Vessel will be “operationally ready” once equipment loaded and trained spill responders are embarked - Operations to be conducted in operational zones beyond dispersant operations and in areas which threaten priority environmental sensitivities 	<p>Equipment</p> <p>Vessels</p> <p>Booms, skimmers, ancillary equipment</p> <p>Personnel</p> <p>Trained Personnel (sourced from AMOSC, AMSA) – 2 per vessel</p> <p>Incident Action Plan (IAP) – Task Assignment to be developed and disseminated in order to commence containment and recovery operations</p>	<p>Commence C&R operations within 24-36 hours of IMT activation</p>
------------------------------------	---	--	--	---

ACTION PLAN: CONTAINMENT AND RECOVERY			
Task	Actions	Resources	Timeframe
	<ul style="list-style-type: none"> - Daily reporting requirements back to IMT on conduct of operations and operational status 		
	<p>Manage waste from containment and recovery operations</p> <p><u>IMT to assess viability of following options:</u></p> <ol style="list-style-type: none"> Option 1 (Preferred option): Subject to approvals from the relevant Jurisdictional Authority (refer to Section 11.5) and weather permitting, decant oil from water in tanks onboard the recovery vessels and discharge the water component overboard within the apex of the containment booms. Then transfer remaining product to IBCs for temporary storage Option 2: Transfer oily waste water (not decanted) to tanks onboard support vessel/s or other recovery vessels for storage and possible treatment <p>Note: Environmental approvals must be obtained prior to liquid waste discharge to the environment. Records are to be retained of volumes discharged.</p> <ol style="list-style-type: none"> Manage solid waste generated: <ol style="list-style-type: none"> Can be temporarily stored on-board the support vessel or facility for transfer to mainland for disposal by a licensed contractor Ensure washdown of offshore equipment is conducted in hot zone's only 	<p>Waste Management Plan</p> <p>IMT support – to be provided by waste management contractor</p> <p>Waste Management – controlled waste tracking to be managed throughout</p>	<p>Review options within 48 hours of IMT activation</p>

17.8 Protection and Deflection Action Plan

ACTION PLAN: PROTECTION AND DEFLECTION				
Task	Actions	Resources	Timeframe	
1. Engage with relevant stakeholders and develop plan to conduct protection and deflection operations Responsible Person: IMT (Planning)				
ONGOING RESPONSE ACTIONS	Commence stakeholder engagement	Notify WA DoT if there are likely to be any impacts on state shorelines. Refer to IMTRP and Appendix A6 for detail on regulatory notifications. Note: All shoreline clean-up operations conducted within WA state waters (includes waters around islands) fall under the remit of WA DoT's IMT and associated IAP's. Priority receptors and strategies will be confirmed/implemented under the direction of the Control Agency. Refer to IMTRP for further information on cross jurisdictional arrangements.	Personnel WA DoT IMT Forms and Guidance WA DoT Offshore Petroleum Industry Guidance Note - Marine Oil Pollution: Response and Consultation Arrangements (WA DoT, 2020)	Within 2 hours of becoming aware of potential impacts to state
NOTE: All protection and deflection activities in the following steps are indicative only – at the direction of the State IMT who will be the Control Agency for the spill in State waters				
	Conduct SCAT	1. Conduct an initial shoreline assessment (i.e. SCAT) (ground / aerial survey depending on access)	Refer to Section 9.4.7 for detail.	Commence deployment of SCAT Teams within 48 hours of becoming aware of impacts to shorelines

	<p>Conduct NEBA</p>	<p>1. Using the latest results of operational monitoring activities, conduct operational NEBA to determine if protection and deflection is likely to result in a net environmental benefit.</p> <p>Operational NEBA considerations:</p> <ul style="list-style-type: none"> • Are conditions (e.g. tides, current, sea state) favourable for this strategy to be effective in open ocean environments immediately surrounding the emergent sensitivities (reefs)? • Will access to the shallow intertidal areas on top of emergent sensitivities be safe and feasible? • Can the IMT access suitable shallow draft vessels to safely establish booming arrangements (e.g. does vessel have ability to transfer anchors and booms; does it have adequate tie-points?). • Is there potential that submerged receptors could be damaged from potential anchor drag? <p>Ongoing Actions</p> <p>Daily re-evaluation of NEBA to assess varying net benefits and impacts of continuing to conduct protection and deflection activities</p>	<p>Operational NEBA form Planning Lead</p>	<p>Conduct within 2 hours of becoming aware of potential impacts to state / territory waters</p> <p>Daily NEBA re-evaluation</p>
--	----------------------------	---	--	--

	<p>Develop Protection & Deflection Plan</p>	<p>1. If NEBA indicates that there is an overall environmental benefit of applying this strategy, develop a Protection and Deflection Plan (IAP sub-plan) to include the following data:</p> <ul style="list-style-type: none"> a) Priority near-shore and shoreline areas for protection (liaise with HMA to confirm priority locations and consult latest operational monitoring data, including SCAT surveys); b) Locations to deploy protection and deflection equipment; c) Method of deployment for each location i.e., exclusion, diversion, river, shore-line sealing booring etc) d) List of resources (personnel and equipment) required; e) Timeframes to undertake deployment; f) Access / egress locations from land or sea; g) Frequency of boom inspections and maintenance (noting tidal cycles). <p>Note: Consult AMOSC and State, considering the practicalities, likely success and risks associated with a shoreline operations in remote locations.</p>	<p>Personnel AMOSC to assist with state IMT with development of Protection and Deflection Plan (IAP sub-plan)</p> <p>Deliverables Protection and Deflection Plan (IAP sub-plan)</p>	<p>Develop a plan, if required, within 12 hours of NEBA confirming an overall environmental benefit</p>
		<p>2. Obtain approvals to access the following areas if response activities are required within:</p> <ul style="list-style-type: none"> a) World Heritage Areas (from DAWE); b) Commonwealth reserves including AMPs (from DAWE / Parks Australia); c) State reserves (from WA DBCA); d) Aboriginal heritage areas (from WA DAA); and e) International waters (from DFAT). <p>3. Refer IMTRP Arrangements for regulatory notification and reporting requirements.</p>	<p>Deliverables Copy of access approvals</p>	<p>Within 3 days of spill or 48 hours prior to estimated contact with shoreline environment</p>

2. Mobilise protection and deflection resources Responsible Person: IMT (Logistics and Operations)				
	Mobilisation of resources to support operations	1. Commence mobilising protection and deflection equipment in readiness for potential use.	Equipment Booming systems Sorbent materials PPE	Commence deployment within 24 hours of completion of Protection and Deflection Plan (IAP sub-plan)
		2. Mobilise support vessels with capabilities to deploy protection and deflection teams and equipment to remote locations via: a) Vessel deployment; and b) Land-side deployment.	Equipment <u>Vessels:</u> Flat bottomed or vessels with tenders Capable of accommodating vessel crew plus 12 additional personnel and equipment Capable of deploying booms in waterways and shallow seas Personnel <u>Per vessel:</u> Vessel crew 2 x Trained operator / Team Leader(s) (AMOS, AMSA) 5 x Labourers	Commence deployment within 24 hours of completion of Protection and Deflection Plan (IAP sub-plan)
3. Commence protection and deflection operations Responsible Person: IMT (Operations)				

	<p>Conduct Protection and Deflection operations</p>	<ol style="list-style-type: none"> 1. Commence on-site protection and deflection activities as per the P&D Plan (IAP sub-plan) 2. Nominated Shoreline Response Team Leader to report back on effectiveness to IMT Leader 	<p>Equipment</p> <p>Booming systems Sorbent materials PPE Vessels</p> <p>Personnel</p> <p>Per vessel: Vessel crew 2 x Trained operator / Team Leader(s) (AMOSC, AMSA) 5 x Labourers</p> <p>Deliverables</p> <p>Records of equipment used and personnel employed</p>	<p>Commence deployment of personnel, equipment and vessels within 24 hours of completion of Protection and Deflection Plan</p>
--	--	--	--	--

17.9 Shoreline Clean-up Action Plan

ACTION PLAN: SHORELINE CLEAN-UP				
Task	Actions	Resources	Timeframe	
1. Engage with relevant stakeholders and develop plan to conduct shoreline clean-up if appropriate Responsible Person: IMT (Planning)				
ONGOING RESPONSE ACTIONS	Commence stakeholder engagement	Notify WA DoT if there are likely to be any impacts on state shorelines. Notify Parks Australia if there are likely to be any impacts to Australian Marine Parks. Refer to IMTRP and Appendix A6 for detail on regulatory notifications. Notes: <ul style="list-style-type: none"> All shoreline clean-up operations conducted within WA state waters (includes waters around islands) fall under the remit of WA DoT's IMT and associated IAP's. Priority receptors and clean-up strategies will be confirmed/implemented under the direction of the Control Agency. Refer to IMTRP for further information on cross jurisdictional arrangements 	Personnel WA DoT IMT Forms and Guidance WA DoT Offshore Petroleum Industry Guidance Note - Marine Oil Pollution: Response and Consultation Arrangements (WA DoT, 2020)	Within 2 hours of becoming aware of potential contact to state waters
NOTE: All shoreline clean-up operations in the following steps are indicative only – at the direction of the State IMT who will be the Control Agency for the spill in State waters				
	Conduct shoreline assessment	1. Conduct an initial shoreline assessment (i.e. SCAT) (ground / aerial survey depending on access) Note: Unmanned Aerial Vehicles (UAVs) may be necessary for some sensitive environments and where personnel safety is at risk	Refer to Section 13.	Commence deployment of SCAT Teams within 48 hours of becoming aware of impacts to shorelines

	<p>Conduct NEBA</p>	<p>1. Using the latest results of operational monitoring activities, (with a focus on SCAT surveys), conduct operational NEBA to determine if shoreline clean-up is likely to result in a net environmental benefit.</p> <p>Operational NEBA considerations:</p> <ul style="list-style-type: none"> • What volumes and/or concentrations of hydrocarbons are present or expected on the shoreline and what would be the impact to leave the product to weather naturally? • Will access to remote shorelines be safe and feasible? • Will responders disturb sensitive nesting species? • Would it reduce overall impacts to send small teams of clean-up personnel? <p>Ongoing Actions</p> <p>2. Daily re-evaluation of NEBA to assess varying net benefits and impacts of continuing to conduct shoreline clean-up activities.</p>	<p>Operational NEBA form Planning Lead</p>	<p>Conduct within 2 hours of becoming aware of potential impacts to shorelines</p>
--	----------------------------	---	--	--

	<p>Develop Shoreline Clean-up plan</p>	<p>3. If NEBA indicates that there is an overall environmental benefit develop a Shoreline Clean-up Plan (IAP sub-plan) to include the following information:</p> <ul style="list-style-type: none"> p) Priority near-shore and shoreline areas for protection (liaise with HMA for direction on locations and consult latest operational monitoring data, including SCAT surveys); q) Locations to deploy shoreline clean-up personnel equipment; r) Method of deployment for each location i.e., exclusion, diversion, river, shore-line sealing booming etc) s) Frequency of clean-up (to minimise impacts to geomorphology, receptors) t) List of resources (personnel and equipment) required; u) Logistics involved in deploying equipment and personnel (i.e. vessel-based accommodation, use of barges, landing craft and helicopters in remote environments); v) Timeframes to undertake deployment; w) Health and Safety constraints; x) Access / egress locations from land or sea; and y) Waste management. (see note below). <p><u>Plan shall address the following:</u></p> <ul style="list-style-type: none"> • Clean-up activities in sensitive environments shall be conducted in front of the primary dune and crews will not access behind the primary dune • Temporary waste storage on remote beaches should be located at the bottom of the primary dune and above the Highest Astronomical Tide (HAT) mark • Demarcation zones to be established for shoreline operations involving vehicle and personnel movement considering vegetation, bird nesting/roosting areas and turtle nesting timeframes • Access plans for shoreline operations will prioritise use of existing roads and tracks • Terrestrial vehicle and equipment deployment via landing barges where there are no existing track access 	<p>Personnel AMOSC to assist with State IMT with development of Shoreline Clean-up Plan (IAP sub-plan)</p> <p>Deliverables Shoreline Clean-up Plan (IAP sub-plan)</p>	<p>Develop a plan, if required, within 12 hours of NEBA confirming an overall environmental benefit</p>

	<ul style="list-style-type: none"> • Vehicles and equipment are verified as clean and invasive species free prior to deployment to site • A Specialist Advisor is consulted if shoreline operations overlap with areas of cultural or heritage significance • Onshore equipment wash-down occurs in a decontamination area <p>Note: Consult AMOSC and State, considering the practicalities, likely success and risks associated with a shoreline operations in remote locations.</p>		
	<p>4. Obtain approvals to access the following areas if response activities are required within:</p> <ol style="list-style-type: none"> a) World Heritage Areas (from DAWE); b) Commonwealth reserves including AMPs (from DAWE / Parks Australia); c) State reserves (from WA DBCA); d) Aboriginal heritage areas (from WA DAA); and e) International waters (from DFAT). <p>5. Refer IMTRP for regulatory notification and reporting requirements.</p>	<p>Deliverables Copy of access approvals</p>	<p>Within 3 days of spill or 48 hours prior to estimated contact with shoreline environment</p>

2. Mobilise shoreline clean-up resources Responsible Person: IMT (Logistics and Operations)				
	Mobilisation of all required resources	1. Commence mobilising shoreline clean-up equipment in readiness for potential use.	Equipment Manual equipment (i.e. shovels, rakes, buckets, wheelbarrows etc) Mechanical equipment (i.e. tiller, skid steer etc) Sorbent materials Decontamination kit Access vehicles (if required) (i.e. quad bikes, 4WD's etc) Personnel facilities (i.e. PPE, food, water, temporary accommodation, communications network, amenities etc) Waste storage (i.e. portable tanks, IBC's, plastic bags, skip bins etc) and transport Forms and Guidance Shoreline Clean-up Plan (IAP sub-plan)	Commence deployment within 24 hours of completion of Shoreline Clean-up Plan
		2. Commence mobilising shoreline clean-up teams: a) Clean-up teams to consist of 10 responders, including one trained Shoreline Responder to act as Team Lead 3. Contact labour hire agencies in Dampier to source labour hire personnel.	Personnel Trained Shoreline Responder Team Leads (one per team) Labourers (9 per team) Forms and Guidance Shoreline Clean-up Plan (IAP sub-plan)	Commence deployment within 24 hours of completion of Shoreline Clean-up Plan

		<p>4. Mobilise transport with capabilities to deploy shoreline clean-up teams and equipment to remote locations.</p>	<p>Equipment</p> <p><u>Vessels:</u> Flat bottomed or vessels with tenders Capable of accommodating vessel crew plus a minimum of 10 additional personnel and equipment Helicopters</p> <p>Personnel Vessel crew Clean-up team as stated above</p> <p>Forms and Guidance Shoreline Clean-up Plan (IAP sub-plan)</p>	<p>Commence deployment within 24 hours of completion of Shoreline Clean-up Plan</p>
--	--	--	---	---

3. Coordinate shoreline monitoring Responsible Person: IMT (Operations)			
	Prepare to commence Shoreline Clean-up operations	<ol style="list-style-type: none"> 1. Shoreline Team Lead to liaise with SCAT Team to confirm suitable clean-up techniques for surveyed shorelines prior to undertaking clean-up activities 2. Shoreline Team Lead and IMT (Plan) to liaise with HMA to confirm shoreline clean-up techniques based on NEBA and SCAT surveys 3. Shoreline clean-up team members are briefed by Shoreline Team Leads on how to implement the shoreline clean-up techniques including how to prevent damage to shoreline habitat and surrounding laydown/staging areas 4. Shoreline Team Leads shall verify clean-up effectiveness and conduct final evaluations in conjunction with SCAT Teams. <p>Note: Clean-up activities shall be implemented under the direction of the HMA (Refer to IMTRP for further information on cross jurisdictional arrangements and HMAs)</p>	Equipment Camera GPS Spades Tape measures Sampling equipment Vehicles (as required) Aerial survey equipment (e.g. Unmanned Aerial Vehicles (UAVs)) Personnel Trained Shoreline Responder Team Leads (one per team) Labourers (9 per team) Forms / Guidance Shoreline Assessment Ground Survey Shoreline Assessment Guideline – Ground Surveys AMSA / ITOPF / NOAA guidelines and forms Shoreline Clean-up Methods table (below) Deliverables Shoreline assessment survey reports Lab reports
5. Set up shoreline clean-up operations Responsible Person: IMT (Operations)			

	<p>Complete preparations for Shoreline Clean-up operations</p>	<p>1. Establish base:</p> <ul style="list-style-type: none"> a) Set up shelter, communications, amenities, food, water etc; b) Organise equipment and PPE; c) Deliver inductions and training to all personnel as appropriate; d) Define pathways for access / egress to minimise damage to the environment. 	<p>Equipment As per Shoreline Clean-up Plan (IAP sub-plan)</p> <p>Personnel Shoreline clean-up assessment team Government specialists Labour hire</p> <p>Forms and Guidance Shoreline Clean-up Plan (IAP sub-plan)</p> <p>Deliverables Induction records</p>	<p>Commence deployment within 24 hours of completion of Shoreline Clean-up Plan</p>
<p>5. Commence shoreline clean-up operations Responsible Person: IMT (Operations)</p>				
	<p>Implement plan and conduct Shoreline Clean-up operations</p>	<p>1. Commence shoreline clean-up activities as per the Shoreline Clean-up Plan (IAP Sub-plan) ensuring that the following will occur:</p> <ul style="list-style-type: none"> a) Adequate supervision of teams; b) Minimise damage to flora and fauna; c) Schedule oil removal activities for cooler times of the day when it is more solid / waxy to minimise the amount of waste that is generated; d) Site is set up suitably to minimise secondary contamination; and e) Correct waste management is implemented. 	<p>Personnel Shoreline clean-up team leaders and crews WA DoT specialists Labour hire</p>	<p>Commence deployment within 24 hours of completion of Shoreline Clean-up Plan</p>
		<p>2. Monitor the following parameters during implementation to assess effectiveness:</p> <ul style="list-style-type: none"> a) Ongoing shoreline monitoring; b) Ongoing availability on sufficient resources (personnel and equipment); and c) Waste management (i.e. predicted volumes, minimisation, temporary storage, transport and waste disposal). d) Report back on effectiveness to IMT Leader. 	<p>Deliverables Progress reports Records of equipment used and personnel employed Records of waste generated Waste disposal receipts</p>	<p>Ongoing until termination of response</p>

17.10 Oiled Wildlife Plan

ACTION PLAN: OILED WILDLIFE RESPONSE				
Task	Actions	Resources	Timeframe	
<p>1. Make regulatory notifications and activate the Oiled Wildlife Response Division Responsible Person: IMT (Planning)</p>				
INITIAL RESPONSE ACTIONS	<p>Complete initial notifications</p>	<p>Notify DBCA / DAWE if there are likely to be any impacts on wildlife</p>	<p>Forms and Guidance Refer to IMTRP for detail on regulatory notifications</p>	<p><2 hours of becoming aware of potential impacts to wildlife</p>
	<p>Activate OWR capability</p>	<p>1. Activate the oiled wildlife response sub-division within the Operations Division with the support of the IMT Leader:</p> <ul style="list-style-type: none"> a) IMT Operations Co-ordinator to appoint a Jadestone Oiled Wildlife Advisor (OWA) to be part of the IMT. b) Government resources: <ul style="list-style-type: none"> i. WA jurisdiction: DBCA will appoint a DBCA OWA to be embedded within the DoT IMT to assist the Jadestone OWA. ii. Commonwealth jurisdiction: DAWE rely on support from respective state / territory statutory authority. <p>2. Refer to IMTRP for further information on cross jurisdictional arrangements.</p> <p>3. Refer to Appendix A in the WA OWRP for a description of roles and responsibilities for all positions in the OWR division.</p>	<p>Personnel OWA from Jadestone or AMOSC DBCA OWA</p> <p>Forms and Guidance WA OWRP</p>	<p><2 hours of becoming aware of potential impacts to wildlife</p>

ACTION PLAN: OILED WILDLIFE RESPONSE				
Task	Actions	Resources	Timeframe	
ONGOING RESPONSE ACTIONS	Assess potential impact of OWR operations	<ol style="list-style-type: none"> 1. Conduct a NEBA based on available information to determine if there is an overall environmental benefit in conducting oiled wildlife response activities. This will depend on the following: <ol style="list-style-type: none"> a) Conservation status of fauna likely to be affected; b) Relevant EPBC Management Plans and specific protection measures for wildlife protected under Part 3 of the EPBC Act, including their habitat; c) Number of wildlife likely to be affected; d) Breeding/nesting status of species likely to be affected; e) Vulnerability and/or recoverability to hydrocarbon type; f) Estimated success of oiled wildlife response activities; and g) Regulator and community expectations. 	<p>Personnel OWAs to assist with NEBA</p> <p>Forms and Guidance NEBA template WA OWRP Wildlife reconnaissance data</p> <p>Deliverables NEBA report</p>	<p>Conduct NEBA within 2 hours of potential impacts to wildlife being identified</p> <p>Ongoing every 24 hours thereafter or as required</p>
	Establish OWR structure within IMT	<ol style="list-style-type: none"> 1. If NEBA determines that there is an overall benefit to activating an oiled wildlife response, OWA(s) to assign a Wildlife Division Co-ordinator to establish an appropriately sized OWR division within the IMT: <ol style="list-style-type: none"> a) Refer to Oiled Wildlife Command Structure b) Consult with OWA on State protection priorities c) Refer to Table 7 in the WA OWRP for indicative wildlife response personnel resourcing. d) Refer to Attachment A in the WA OWRP for a description of roles and responsibilities for all positions in the OWR Division. 	<p>Personnel Wildlife Division Co-ordinator (WA) Wildlife Division Personnel (WA)</p> <p>Forms and Guidance WA OWRP</p>	<p>Within 24 hours of risk being identified</p>

ACTION PLAN: OILED WILDLIFE RESPONSE

Task	Actions	Resources	Timeframe
	2. Wildlife first strike response Responsible Person: Oiled Wildlife Advisor with assistance from Wildlife Division Co-ordinator		

	<p>Stand up OWR capability</p>	<p>1. Refer to Section 4.1 of the WA OWRP:</p> <ul style="list-style-type: none"> a) Assess the situation; b) Determine the potential response level (refer to Table 6 Indicative Oiled Wildlife Response Levels in the WA OWRP); c) Determine resources required and available; and d) Mobilise first strike OWR kits. 	<p>Equipment First strike OWR kits</p> <p>Forms and Guidance WA OWRP</p>	<p>Commence within 48 hours of risk being identified</p>
--	---------------------------------------	---	--	--

3. Mobilisation of wildlife resources
Responsible Person: Wildlife Division Co-ordinator / Wildlife Logistics Co-ordinator

	<p>Mobilisation of required resources to support OWR operations</p>	<p>1. Refer to Section 4.2 of the WA OWRP:</p> <ul style="list-style-type: none"> a) Mobilise key personnel within the OWR Division: b) Wildlife Planning Officer to lead planning the OWR response. c) Wildlife Operations Officer to lead the mobilisation of operational resources on site where oiled wildlife is present. d) Wildlife Logistics Officer to mobilise equipment as appropriate for the scale of incident <p>2. Refer to WA OWRP Section 7 for indications of resources needed for each stage of the OWR.</p>	<p>Equipment WA OWRP</p> <p>Personnel Wildlife Planning Officer Wildlife Operations Officer Wildlife Logistics Officer</p> <p>Forms and Guidance WA OWRP</p>	<p>Mobilise key personnel and commence mobilising equipment within 48 hours of risk being identified</p>
--	--	---	---	--

<p>4. Coordinate wildlife reconnaissance Responsible Person: Wildlife Operations and Planning Officer</p>				
	<p>Conduct ALL preparations in support of OWR operations</p>	<ol style="list-style-type: none"> 1. Refer to Section 4.3 and Table 14-2 of the WA OWRP: <ol style="list-style-type: none"> a) Wildlife Operations Officer to oversee the Wildlife Reconnaissance Unit and determine the best means for monitoring fauna (via plan, vessel or shoreline survey). b) Wildlife Planning Officer to create a geo-plot of all known wildlife communities in the local area that may be affected. 2. The shoreline clean-up assessment team may be able to have a dual function as the wildlife reconnaissance team. 	<p>Equipment</p> <p><u>General:</u> Handheld GPS unit / Digital Camera Binoculars / Spotting scope Field notebook and pencil Geo-plot output including animal communities at risk.</p> <p><u>Transport:</u> Quad motorbikes or 4wd vehicles Small vessels (less than 12m length) Aerial support (fixed wing or helicopter)</p> <p>Personnel Wildlife Reconnaissance Unit</p> <p>Forms and Guidance WA OWRP</p> <p>Deliverables Survey logs</p>	<p>Commence within 2 days of risk being identified</p>
<p>5. Develop IAP subplan for oiled wildlife response Responsible Person: Wildlife Planning Officer with assistance from Wildlife Division Coordinator</p>				
	<p>Incident action planning to support OWR operations</p>	<ol style="list-style-type: none"> 1. Refer to Section 4.4 of the WA OWRP: <ol style="list-style-type: none"> a) Based on information from wildlife reconnaissance develop the IAP oiled wildlife response sub-plan including information on: <ol style="list-style-type: none"> i. Wildlife priorities for protection from oiling; ii. Deterrence measures; iii. Recovery and treatment of oiled wildlife; and iv. Resourcing of equipment and personnel. 	<p>Personnel</p> <ul style="list-style-type: none"> • Wildlife Division Co-ordinator <p>Forms and Guidance</p> <ul style="list-style-type: none"> • WA OWRP <p>Deliverables IAP</p>	<p>Within 12 hours of wildlife reconnaissance confirming potential or realised impacts to wildlife</p>

6. Wildlife rescuing and staging Responsible Person: Wildlife Operations Officer and Wildlife Logistics Officer				
	Establish rescue and staging	<ol style="list-style-type: none"> 1. Refer to Section 4.5 of the WA OWRP: <ol style="list-style-type: none"> a) Wildlife Operations Officer to oversee the Wildlife Rescue and Wildlife Staging / Holding Units to undertake the following: <ol style="list-style-type: none"> i. Pre-emptive capture (refer to Appendix H in WA OWRP) ii. Hazing; and iii. Oiled wildlife rescue, transport and staging (refer to Appendix B, C and D in the WA OWRP). 2. Any deterrence / hazing / pre-emptive capture activities will require licensing authority from WA DBCA DAWE through the OWA. 	Equipment Wildlife capturing equipment Hazing equipment Staging site Oiled wildlife facility Transport for personnel and wildlife Personnel Wildlife Rescue Unit (minimum 3 people) Wildlife Staging / Holding Unit Forms and Guidance Wildlife SITREP Form (WA OWRP Appendix J) Deliverables Wildlife handling licences / approvals	Ongoing after commencement of capturing wildlife
		<ol style="list-style-type: none"> 3. Record keeping is a critical part of the management of captured wildlife whether pre-emptive or following oiling. Records must be kept from the point of capture and travel with each individual animal. On arrival at the rehabilitation centre the wildlife should be tracked through the system on the treatment record. 	Forms and Guidance Wildlife Status / SITREP Form (WA OWRP Appendix J)	Ongoing after commencement of capturing wildlife
7. Establishment of an oiled wildlife facility Responsible Person: Wildlife Operations Officer				
	OWR Facility	<ol style="list-style-type: none"> 1. Refer to Section 4.6 of the WA OWRP: Wildlife Operations Officer to oversee the Wildlife Facilities Team to undertake the following: <ol style="list-style-type: none"> a) Install the oiled wildlife containers (suitable for <50 animals per day). b) Establish an oiled wildlife facility (on land or on vessel) if the response is escalated > 50 animals per day. The procedure for 	Equipment Refer to WA OWRP Section 7 Personnel Wildlife Facilities Unit (minimum 6 people) to include facility development specialist	Initial oiled wildlife containers to be onsite / infield within 7 days of risk being identified

		<p>setting up and using an oil wildlife facility is in Appendix E of the WA OWRP.</p> <p>2. Dampier and Exmouth are the most suitable locations for large scale OWR Facilities in the Pilbara region. On water facilities utilising barges may be established to service more remote areas including the offshore islands.</p>	<p>and trades (plumber, electrician and carpenter)</p> <p>Forms and Guidance WA OWRP</p>	<p>Oiled wildlife facility to be established ASAP, time will vary depending on response level</p>
<p>8. Wildlife rehabilitation Responsible Person: Wildlife Operations Officer</p>				
	<p>Rehabilitation</p>	<p>1. Refer to Section 4.7 of the WA OWRP: Wildlife Operations Officer to oversee the Wildlife Rehabilitation Unit to treat undertake the following:</p> <ul style="list-style-type: none"> a) Initial treatment of oiled wildlife using the oiled wildlife containers (suitable for <50 animals per day). b) Treat oiled wildlife using oiled wildlife facility. Refer to: <ul style="list-style-type: none"> i. Figure 12 in WA OWRP: Overview of Oiled Wildlife Rehabilitation ii. Appendix F: Triage and First Aid SOP iii. Appendix G: Cleaning and Drying Wildlife SOP. <p>2. Release rehabilitated fauna back to their natural habitat.</p> <p>3. Maintain records of fauna treatment and release.</p>	<p>Equipment Oiled wildlife containers Oiled wildlife facility</p> <p>Personnel Wildlife Rehabilitation Unit</p> <p>Forms and Guidance WA OWRP Wildlife Status / SITREP Form (WA OWRP Appendix J) Wildlife Rescue and Release Form (WA OWRP Appendix J)</p>	<p>Ongoing during response</p>
<p>9. Oiled wildlife response termination Responsible Person: IMT Leader</p>				
	<p>Termination</p>	<p>1. Refer to Section 4.8 of the WA OWRP: Once the decision has been made to terminate oiled wildlife operations (as per termination criteria), the EMT Leader will initiate a staged stand down of functions through the Wildlife Division Co-ordinator in the following order:</p> <ul style="list-style-type: none"> a) Termination of Wildlife Rescue Unit. 	<p>Personnel Wildlife Facilities Unit (minimum 6 people) to include trades (plumber, electrician and carpenter)</p> <p>Forms and Guidance</p>	<p>When termination criteria have been met</p>

	<p>b) Termination of Wildlife Staging / Holding Unit.</p> <p>c) Termination of Rehabilitation Unit.</p> <p>d) Dismantling or demobilisation of or from temporary oiled wildlife facilities by Wildlife Facilities Unit.</p> <p>2. Termination of Wildlife Facilities Unit.</p>	WA OWRP	
	<p>3. Once the Wildlife Division has been demobilised, the Wildlife Division Co-ordinator will arrange a hot debrief to analyse their involvement in the wildlife response. Once the major operational phase of the response is completed an 'all agencies' debrief will be organised followed up with a formal report.</p>	<p>Deliverables</p> <p>Incident specific OWR report</p>	<p>After termination of oiled wildlife response</p>

	<p>Stand up OWR capability</p>	<p>1. Refer to Section 4.1 of the WA OWRP:</p> <ul style="list-style-type: none"> a) Assess the situation; b) Determine the potential response level (refer to Table 6 Indicative Oiled Wildlife Response Levels in the WA OWRP); c) Determine resources required and available; and d) Mobilise first strike OWR kits. 	<p>Equipment First strike OWR kits</p> <p>Forms and Guidance WA OWRP</p>	<p>Commence within 48 hours of risk being identified</p>
<p>3. Mobilisation of wildlife resources Responsible Person: Wildlife Division Co-ordinator / Wildlife Logistics Co-ordinator</p>				
	<p>Mobilisation of required resources to support OWR operations</p>	<p>1. Refer to Section 4.2 of the WA OWRP:</p> <ul style="list-style-type: none"> a) Mobilise key personnel within the OWR Division: b) Wildlife Planning Officer to lead planning the OWR response. c) Wildlife Operations Officer to lead the mobilisation of operational resources on site where oiled wildlife is present. d) Wildlife Logistics Officer to mobilise equipment as appropriate for the scale of incident <p>2. Refer to WA OWRP Section 7 for indications of resources needed for each stage of the OWR.</p>	<p>Equipment WA OWRP</p> <p>Personnel Wildlife Planning Officer Wildlife Operations Officer Wildlife Logistics Officer</p> <p>Forms and Guidance WA OWRP</p>	<p>Mobilise key personnel and commence mobilising equipment within 48 hours of risk being identified</p>

<p>4. Coordinate wildlife reconnaissance Responsible Person: Wildlife Operations and Planning Officer</p>				
	<p>Conduct ALL preparations in support of OWR operations</p>	<ol style="list-style-type: none"> 1. Refer to Section 4.3 and Table 14-2 of the WA OWRP: <ol style="list-style-type: none"> a) Wildlife Operations Officer to oversee the Wildlife Reconnaissance Unit and determine the best means for monitoring fauna (via plan, vessel or shoreline survey). b) Wildlife Planning Officer to create a geo-plot of all known wildlife communities in the local area that may be affected. 2. The shoreline clean-up assessment team may be able to have a dual function as the wildlife reconnaissance team. 	<p>Equipment</p> <p><u>General:</u> Handheld GPS unit / Digital Camera Binoculars / Spotting scope Field notebook and pencil Geo-plot output including animal communities at risk.</p> <p><u>Transport:</u> Quad motorbikes or 4wd vehicles Small vessels (less than 12m length) Aerial support (fixed wing or helicopter)</p> <p>Personnel Wildlife Reconnaissance Unit</p> <p>Forms and Guidance WA OWRP</p> <p>Deliverables Survey logs</p>	<p>Commence within 2 days of risk being identified</p>
<p>5. Develop IAP subplan for oiled wildlife response Responsible Person: Wildlife Planning Officer with assistance from Wildlife Division Coordinator</p>				
	<p>Incident action planning to support OWR operations</p>	<ol style="list-style-type: none"> 1. Refer to Section 4.4 of the WA OWRP: <ol style="list-style-type: none"> a) Based on information from wildlife reconnaissance develop the IAP oiled wildlife response sub-plan including information on: <ol style="list-style-type: none"> i. Wildlife priorities for protection from oiling; ii. Deterrence measures; iii. Recovery and treatment of oiled wildlife; and iv. Resourcing of equipment and personnel. 	<p>Personnel</p> <ul style="list-style-type: none"> • Wildlife Division Co-ordinator <p>Forms and Guidance</p> <ul style="list-style-type: none"> • WA OWRP <p>Deliverables IAP</p>	<p>Within 12 hours of wildlife reconnaissance confirming potential or realised impacts to wildlife</p>

6. Wildlife rescuing and staging				
Responsible Person: Wildlife Operations Officer and Wildlife Logistics Officer				
	Establish rescue and staging	<ol style="list-style-type: none"> 1. Refer to Section 4.5 of the WA OWRP: <ol style="list-style-type: none"> a) Wildlife Operations Officer to oversee the Wildlife Rescue and Wildlife Staging / Holding Units to undertake the following: <ol style="list-style-type: none"> i. Pre-emptive capture (refer to Appendix H in WA OWRP) ii. Hazing; and iii. Oiled wildlife rescue, transport and staging (refer to Appendix B, C and D in the WA OWRP). 2. Any deterrence / hazing / pre-emptive capture activities will require licensing authority from WA DBCA DAWE through the OWA. 	<p>Equipment</p> <ul style="list-style-type: none"> Wildlife capturing equipment Hazing equipment Staging site Oiled wildlife facility Transport for personnel and wildlife <p>Personnel</p> <ul style="list-style-type: none"> Wildlife Rescue Unit (minimum 3 people) Wildlife Staging / Holding Unit <p>Forms and Guidance</p> <ul style="list-style-type: none"> Wildlife SITREP Form (WA OWRP Appendix J) <p>Deliverables</p> <ul style="list-style-type: none"> Wildlife handling licences / approvals 	Ongoing after commencement of capturing wildlife
		<ol style="list-style-type: none"> 3. Record keeping is a critical part of the management of captured wildlife whether pre-emptive or following oiling. Records must be kept from the point of capture and travel with each individual animal. On arrival at the rehabilitation centre the wildlife should be tracked through the system on the treatment record. 	<p>Forms and Guidance</p> <ul style="list-style-type: none"> Wildlife Status / SITREP Form (WA OWRP Appendix J) 	Ongoing after commencement of capturing wildlife
7. Establishment of an oiled wildlife facility				
Responsible Person: Wildlife Operations Officer				
	OWR Facility	<ol style="list-style-type: none"> 1. Refer to Section 4.6 of the WA OWRP: <p>Wildlife Operations Officer to oversee the Wildlife Facilities Team to undertake the following:</p> <ol style="list-style-type: none"> a) Install the oiled wildlife containers (suitable for <50 animals per day). b) Establish an oiled wildlife facility (on land or on vessel) if the response is escalated > 50 animals per day. The procedure for 	<p>Equipment</p> <ul style="list-style-type: none"> Refer to WA OWRP Section 7 <p>Personnel</p> <ul style="list-style-type: none"> Wildlife Facilities Unit (minimum 6 people) to include facility development specialist 	Initial oiled wildlife containers to be onsite / infield within 7 days of risk being identified

		<p>setting up and using an oil wildlife facility is in Appendix E of the WA OWRP.</p> <p>2. Dampier and Exmouth are the most suitable locations for large scale OWR Facilities in the Pilbara region. On water facilities utilising barges may be established to service more remote areas including the offshore islands.</p>	<p>and trades (plumber, electrician and carpenter)</p> <p>Forms and Guidance WA OWRP</p>	<p>Oiled wildlife facility to be established ASAP, time will vary depending on response level</p>
<p>8. Wildlife rehabilitation Responsible Person: Wildlife Operations Officer</p>				
	Rehabilitation	<p>1. Refer to Section 4.7 of the WA OWRP: Wildlife Operations Officer to oversee the Wildlife Rehabilitation Unit to treat undertake the following:</p> <ul style="list-style-type: none"> a) Initial treatment of oiled wildlife using the oiled wildlife containers (suitable for <50 animals per day). b) Treat oiled wildlife using oiled wildlife facility. Refer to: <ul style="list-style-type: none"> i. Figure 12 in WA OWRP: Overview of Oiled Wildlife Rehabilitation ii. Appendix F: Triage and First Aid SOP iii. Appendix G: Cleaning and Drying Wildlife SOP. <p>2. Release rehabilitated fauna back to their natural habitat.</p> <p>3. Maintain records of fauna treatment and release.</p>	<p>Equipment Oiled wildlife containers Oiled wildlife facility</p> <p>Personnel Wildlife Rehabilitation Unit</p> <p>Forms and Guidance WA OWRP Wildlife Status / SITREP Form (WA OWRP Appendix J) Wildlife Rescue and Release Form (WA OWRP Appendix J)</p>	<p>Ongoing during response</p>
<p>9. Oiled wildlife response termination Responsible Person: IMT Leader</p>				
	Termination	<p>1. Refer to Section 4.8 of the WA OWRP: Once the decision has been made to terminate oiled wildlife operations (as per termination criteria), the EMT Leader will initiate a staged stand down of functions through the Wildlife Division Co-ordinator in the following order:</p> <ul style="list-style-type: none"> a) Termination of Wildlife Rescue Unit. 	<p>Personnel Wildlife Facilities Unit (minimum 6 people) to include trades (plumber, electrician and carpenter)</p> <p>Forms and Guidance</p>	<p>When termination criteria have been met</p>

	<p>b) Termination of Wildlife Staging / Holding Unit.</p> <p>c) Termination of Rehabilitation Unit.</p> <p>d) Dismantling or demobilisation of or from temporary oiled wildlife facilities by Wildlife Facilities Unit.</p> <p>2. Termination of Wildlife Facilities Unit.</p>	WA OWRP	
	<p>3. Once the Wildlife Division has been demobilised, the Wildlife Division Co-ordinator will arrange a hot debrief to analyse their involvement in the wildlife response. Once the major operational phase of the response is completed an 'all agencies' debrief will be organised followed up with a formal report.</p>	<p>Deliverables</p> <p>Incident specific OWR report</p>	<p>After termination of oiled wildlife response</p>

18. REFERENCES

- Australian Maritime Safety Authority (AMSA). (2015) Technical Guideline for the Preparation of Marine Pollution Contingency Plans for Marine and Coastal Facilities Australian Maritime Safety Authority, January 2015. Accessed 2nd January 2021 - <https://www.amsa.gov.au/sites/default/files/2015-04-np-gui012-contingency-planning.pdf>
- Australian Maritime Safety Authority (AMSA). 2020. National Plan for Maritime Environmental Emergencies. Australian Maritime Safety Authority, Canberra, Australian Capital Territory. <https://www.amsa.gov.au/sites/default/files/amsa-496-national-plan.pdf> (Accessed 2nd January 2021)
- APASA (2012) Stag Production Facilities Net Environmental Benefit Analysis for the Use of Dispersants
- APASA (2017) Jadestone Energy – Stag Oil Spill Modelling Dispersant Application (MAW0512J.001)
- American Petroleum Institute (API) (2020) Oil Prevention and Response: Shoreline. Accessed 2nd January 2021 - <http://www.oilspillprevention.org/oil-spill-cleanup/shoreline-wetlands-beaches-oil-spill-cle>
- Bonn Agreement (1998). The Bonn Agreement. <http://www.bonnagreement.org/eng/html/welcome.html> (Accessed 2nd January 2021).
- DoT (2015). Oil Spill Contingency Plan. Prepared by the WA Department of Transport, January, 2015.
- European Maritime Safety Agency (EMSA) (2010). *Manual on the Applicability of Oil Spill Dispersants – Version 2*. Accessed 2nd January 2021 - <http://www.emsa.europa.eu/opr-documents/opr-manual-a-guidelines/item/719-manual-on-the-applicability-of-oil-spill-dispersants.html>
- Government of Western Australia. (2020). *State Hazard Plan – Marine Environmental Emergencies*. Department of Transport, Perth, Western Australia. Accessed 2nd January 2021 - https://www.transport.wa.gov.au/mediaFiles/marine/MAC_P_StateHazardPlanMaritimeEnviroEmergMEEE.pdf
- International Petroleum Industry Environmental Conservation Association and International Association of Oil and Gas Producers (IPIECA-IOPG) (2013), The use of decanting during offshore oil spill recovery operations. Oil Spill Response Joint Industry Project - Finding 17. United Kingdom. Accessed 4th January 2021 - <http://www.environmentalunit.com/Documentation/07%20Waste%20Management/IPIECA%20JIP-17-Decanting.pdf>
- International Petroleum Industry Environmental Conservation Association (IPIECA) (2017), Key principles for the protection and care of animals in an oiled wildlife response. IOPG Report 583.
- ITOPF (2018). ITOPF Members Handbook 2018/19. Prepared by the International Tanker Owners Pollution Federation Ltd. Accessed 2nd January 2021 - https://www.itopf.org/fileadmin/data/Documents/Company_Lit/ITOPF_Handbook_2018.pdf
- International Tanker Owners Pollution Federation (ITOPF). (2014). Technical Information Paper: Clean-up of Oil from Shorelines (TIP07). Accessed 2nd January 2021 at <http://www.itopf.com/knowledge-resources/documents-guides/document/tip-7-clean-up-of-oil-from-shorelines/>
- ITOPF (2015). ITOPF Members Handbook 2011/12. Prepared by the International Tanker Owners Pollution Federation Ltd. <http://www.itopf.com/news-and-events/documents/itopfhandbook2011.pdf>

Michel, J., Fegley, S., Dahlin, J., and Wood, C., (2017). Oil spill response-related injuries on sand beaches: when shoreline treatment extends the impacts beyond the oil. Marine Ecology Process Series. Vol 576. 203-218.

National Oceanic Atmospheric Administration (NOAA), US Coastguard, US Environmental Protection Agency. 2006. Special Monitoring of Applied Response Technologies (SMART) monitoring protocol, Accessed September 2 2021 -

https://response.restoration.noaa.gov/sites/default/files/SMART_protocol.pdf

National Oceanic Atmospheric Administration (NOAA). (2013). Shoreline Assessment Manual. Accessed 2nd January 2021 at

https://response.restoration.noaa.gov/sites/default/files/manual_shore_assess_aug2013.pdf

Stevens, L. and Aurand, D. (2008). Criteria for evaluating oil spill planning and response operations. A report to IUCN, the World Conservation Union, by Ecosystem Management Associates, Inc. Technical Report 07-02

Western Australian Parks and Wildlife (DPaW) and AMOSC. (2014). Western Australian Oiled Wildlife Response Plan (WA OWRP). Accessed 2nd January 2021 at

https://www.dpaw.wa.gov.au/images/documents/conservation-management/marine/wildlife/West_Australian_Oiled_Wildlife_Response_Plan_V1.1.pdf

DPaW and AMOSC (2014) Pilbara Oiled Wildlife Response Plan. Accessed 13th December 2021 at

https://www.dpaw.wa.gov.au/images/documents/conservation-management/marine/wildlife/PROWRP_20141103.pdf

Western Australian Department of Transport (DoT). (2020). Offshore Petroleum Industry Guidance Note – Marine Oil Pollution: Response and Consultation Arrangements. Accessed 2nd January 2021 at

https://www.transport.wa.gov.au/mediaFiles/marine/MAC_P_Westplan_MOP_OffshorePetroleumIndGuidance.pdf

19. ABBREVIATIONS

AIIMS	Australian Inter-Service Incident Management System
AMOSOC	Australian Marine Oil Spill Centre
AMSA	Australian Maritime Safety Authority
ALARP	As Low As Reasonably Practicable
APASA	Asia Pacific Applied Science Associates (Marine and Freshwater Environmental Modelling)
AMOSPLAN	A voluntary oil industry mutual aid plan intended to supplement the National Plan, administered by Australian Institute of Petroleum through AMOSC
CPF	Central Processing Facility
DAA	Department of Aboriginal Affairs
DMIRS	Department of Mines, Industry Regulation and Safety (Previously Department of Mines and Petroleum)
DBCA	Department of Biodiversity Conservation and Attractions
DoT	Department of Transport
DAWE	Department of Agriculture, Water, and the Environment
DPAW	Department of Parks and Wildlife
EP	Environment Plan
FPSO	Floating Production, Storage, and Offtake Vessel
FWADC	Fixed Wing Aerial Dispersant Contract
GIS	Geographic Information System
HAT	Highest Astronomical Tide
HMA	Hazard Management Agency
IAP	Incident Action Plan
IBC	Intermediate Bulk Container
IMO	International Maritime Organisation
ICT	Incident Command Team
IMT	Incident Management Team
ITOPF	International Tanker Owners Pollution Federation
JADESTONE	Jadestone Energy
JSA	Job Safety Analysis
kL	Kilolitres
NEBA	Net Environmental Benefit Assessment
NRT	National Response Team – a group of interstate based individuals with spill response experience across all areas of response activities available to provide support to an Incident Controller
NOPSEMA	National Offshore Petroleum Safety and Environment Management Authority
OIM	Offshore Installation Manager

OIW	Oil in Water
OPEP	Oil Pollution Emergency Plan
OSRA	Oil Spill Response Atlas. National CRA, developed by various State agencies. In WA, WA Transport holds the State OSRA
OSTM	Oil Spill Trajectory Model
OWR	Oiled Wildlife Response
OWRP	Oiled Wildlife Response Plan
POLREP	Pollution Report. A report, reporting a pollution incident
PPE	Personal Protective Equipment
RCC	Rescue Coordination Centre (Canberra, Australia)
SCAT	Shoreline Clean-up Assessment Techniques
SITREP	Means a Situation Report on an actual or potential marine oil pollution incident or response
SMP	Scientific Monitoring Program
SOPEP	Ship Onboard Pollution Emergency Plan
SRT	State Response Team

20. APPENDICES

- A1. Observation Logs (vessel, aerial, shoreline)
- A2. Bonn Agreement Oil on Water Classification
- A3. Shoreline Assessment Form
- A4. Diesel Fuel Properties
- A5. Stag Crude Assay
- A6. Regulatory Notifications
- A7. Incident Management Guidance

Appendix A1 – Observer Logs

Vessel visual observer log

Survey Details					
Date	Start time	End Time	Observers		
Incident			Area of Survey		
Vessel type	Call sign				
Weather Conditions					
Wind speed (knots)		Wind direction			
Cloud cover (%)		Visibility			
Time high water		Current direction			
Time low water		Current speed (nM)			
Slick Details					
Slick grid parameters by lat/long		Slick grid parameters (vessel speed)		Slick grid dimensions	
Length Axis	Width Axis	Length Axis	Width Axis	Length	nm
Start Latitude	Start Latitude	Time (seconds)		Time (seconds)	Width
Start Longitude	Start Longitude			Length	nm
End Latitude	End Latitude	Vessel Speed (knots)		Vessel Speed (knots)	Width
End Longitude	End Longitude			Grid area	km ²

Visual appearance slick
Colours, emulsification etc.
Any marine fauna or other activities observed

Aerial surveillance observation log

Date	Incident	Aircraft type	Call sign	Start time	End time	Av altitude/ air speed
Wind speed (kts)	Wind direction	Visibility (nm)	Cloud base (ft)	Sea state	Observer name/s	Spill source
Survey start /end coordinates	Survey start time	Survey end time	Time high tide	Time low tide	Current speed (nm)	Current direction
<p>Notes (e.g. remote sensing used, wildlife or sensitive receptors observed, any response activities observed):</p>						

Slick details

Slick	Time local	Slick (centre or start)		Slick (end)		Slick Orient Degrees	Oil slick length			Oil slick width			Area km ²	Coverage %	Oiled area km ²
		LAT N/S	LONG E/W	LAT N/S	LONG E/W		SOG KT	Time seconds	Distance km	SOG KT	Time seconds	Distance km			
A															
B															
C															
D															
E															


Slick	Oil appearance coverage - %						Minimum volume - m ³	Maximum volume - m ³	Type of detection (etc. visual, IR)	Edge description (clear or blurred)	General description (windrows/patches)
	1	2	3	4	5	other					
A											
B											
C											
D											


E											
---	--	--	--	--	--	--	--	--	--	--	--

NOTE: Ground Speed (SOG) is the speed of the aircraft relative to the ground (sea) measured in knots (kt). One knot is one nautical mile (nm) per hour. 1 kt = 1 nm per hour = 1.85 Kilometres (km) per hour = 0.03 km (31 m) per minute = 0.0005 km per second

The Bonn Agreement Oil Appearance Code (BAOAC)			
No	Oil appearance	Min. Volume m ³ / km ²	Max. Volume m ³ / km ²
1	Sheen	0.04	0.30
2	Rainbow	0.30	5.00
3	Metallic	5.00	50.0
4	Discontinuous true colour	50.0	200
5	True colour	200	>200

**AERIAL SURVEILLANCE SURFACE SLICK MONITORING
DIAGRAM**

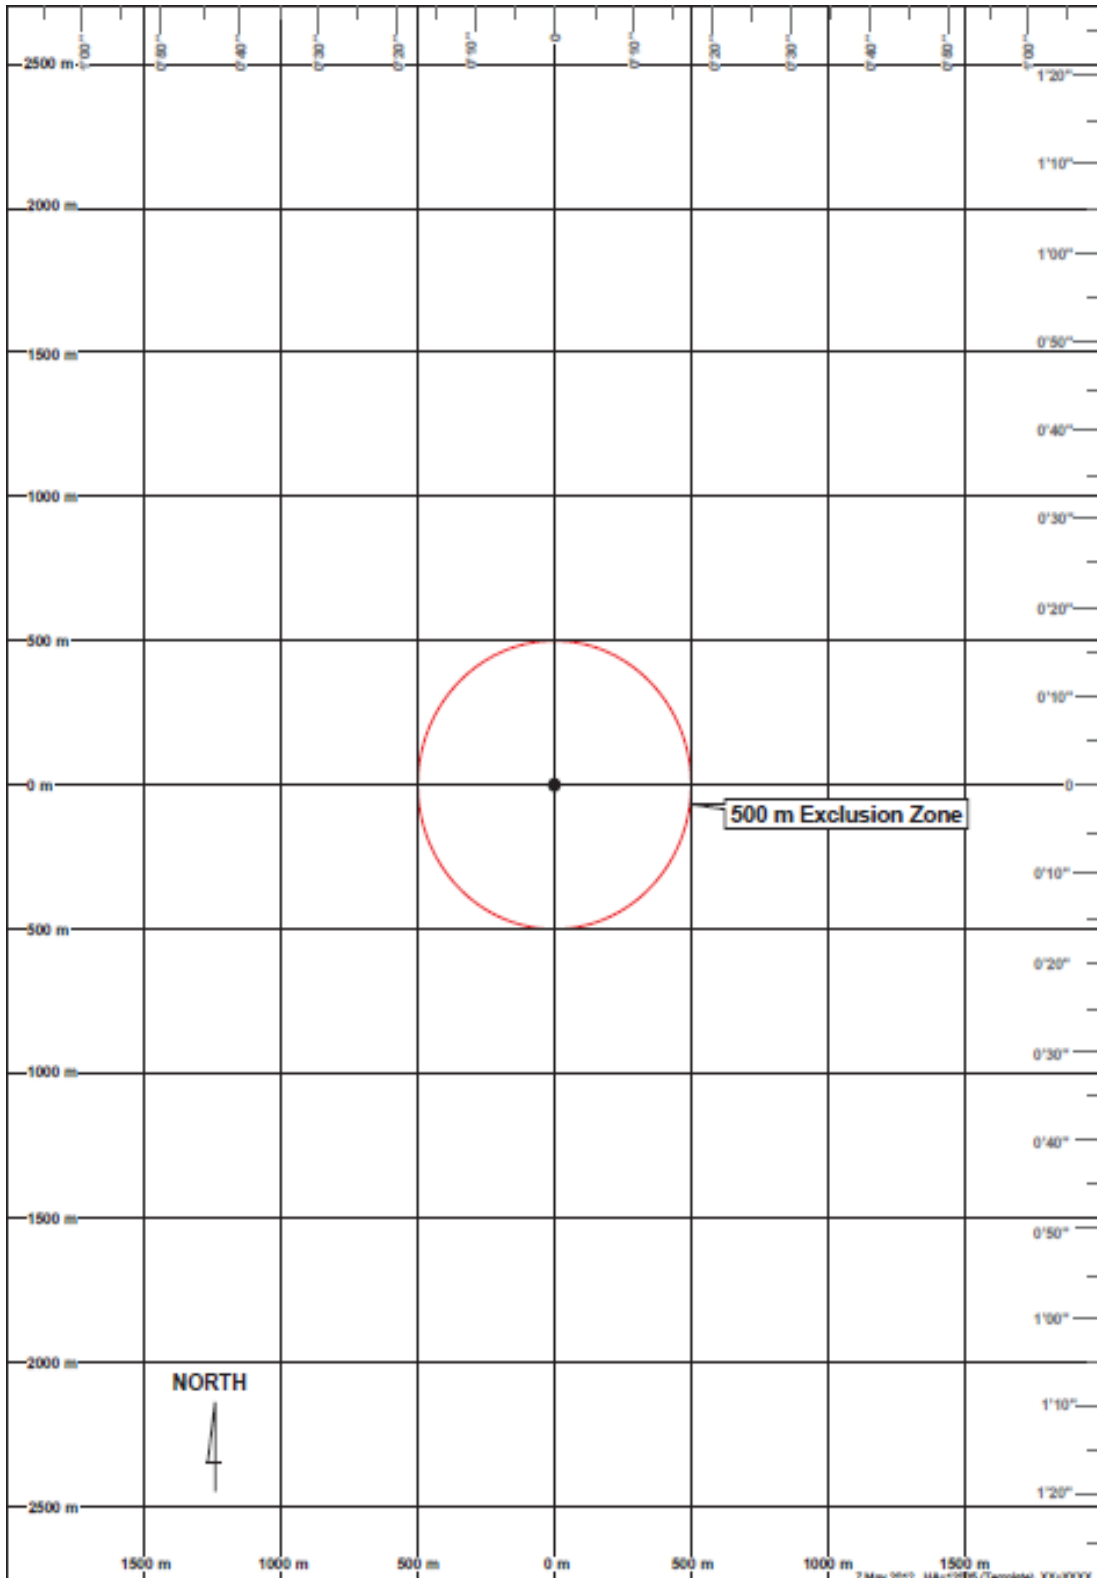

	NAME:	VESSEL / AIRCRAFT:
	DATE / HOUR:	OTHER REFERENCE:

AERIAL SURVIELLANCE MARINE FAUNA SIGHTING RECORD SHEET

Receptor	Type/species	Number	Location	Behaviour / Comments
Cetaceans				
Turtles				
Dugongs				
Sharks				
Sea snakes				
Seabirds				
Vessels				
Other details for each observation location				
Ambient conditions at each location	Date	Photographic record (to include photo ID No., date and time of each photo or video clip, brief description):		
	Time			
	Weather Conditions			
	Visibility (atmospheric)			
	Water turbidity			

Marine Megafauna Assessment Surveys

Triggers

1. Observed proximity of marine megafauna to oil slick or response operations combined with suggestion of significant harm (i.e. not an isolated incident), or
2. Observed incident of harm attributable to oil or the response.

Objectives

1. To quantify the presence of megafauna in the response area (i.e. near the oil slick, response vessels or aircraft) or wider region in order to determine the level of potential exposure to oil.
2. To observe and if possible quantify exposure of megafauna to surface oil or to the response.
3. To detect and quantify lethal effects.
4. Observe and to assess the significance of sub-lethal effects (e.g. avoidance behaviour) of this exposure or interactions.

Data Collection and Management

Data to be recorded from aerial megafauna surveys is outlined in the table below.

Resource	Species	Numbers observed	Location	Behaviour/Comment
Cetaceans		Adult _____ Juvenile _____ Calf _____	Lat _____ Long _____	Direction of movement Proximity to oil Proximity to vessels Identify marks Aversion or other behaviour Carcasses
Birds			Lat _____ Long _____	Direction of movement Proximity to oil Proximity to vessels Identify marks Aversion or other behaviour Carcasses
Other Details for each Observation Location				
Ambient Conditions at Each Location	Date	Photographic/Video Record	Date and time of each	
	Time		Photo/video clip number	
	Weathering conditions		Brief description	
	Visibility		GPS link	

Methodology

It is proposed that observations are made during dedicated monitoring flights supported where necessary by ground (vessel-based) surveys. Flights would normally be dedicated to the monitoring of only one fauna group but multi-objective flights may be required.

Observers must have relevant skills and expertise in the identification of the subject fauna and in interpreting their behaviour. Aircraft must have adequate downward visual capability.

A photographic or video record should be taken of each sighting and precise locations recorded on GPS.

A detailed methodology must be developed prior to commissioning this study. The scope and design of the detailed must include the following:

- State objectives;
- Reflect the level and distribution of observed or anticipated exposure and effects i.e.;
 - Geographic distribution
 - Study duration
- Stipulate replicate sampling, statistical analyses, and scientific rigour;
- Stipulate the expected flight frequency; and
- Indicate comparison to be made between impacted and unimpacted (control) habitats/biota, before and after spill observations.

The plane should follow line transects which are surveyed in passing mode (e.g. the plane did not deviate from the flight path).

Pre-implementation Actions

- Identify personnel or agencies with skills to design and undertake scientific monitoring of cetaceans, dugongs, birds, turtles;
- Undertake detailed study including design, budget, schedule and resource requirements;
- Identify and assign responsibilities for management of the study; and
- Secure identified resources.

Resource Requirements Checklist

- Aircraft
- Species identification manuals
- Aerial camera (still and video). Video to be GPS linked
- Expert megafauna observers

Supporting Documents

AFMA Protected Species Identification Guide: http://www.afma.gov.au/wp-content/uploads/2010/06/id_guide.pdf

Shoreline observation log

Survey Details					
Incident	Date	Start time	End Time	Observers	
Area of Survey					
Start GPS: LAT _____ deg. _____ LONG _____ deg. _____ min			End GPS: LAT _____ deg. _____ LONG _____ deg. _____ min		
Aircraft type	Call sign	Average Altitude	Remote sensing used (if any)		
Weather Conditions					
Sun/Cloud/Rain/Windy		Visibility	Tide Height L/M/H		
Time high water		Time low water	Other		
Shoreline Type - Select only ONE primary (P) and ANY secondary (S) types present					
<input type="checkbox"/>	Rocky Cliffs	<input type="checkbox"/>	Boulder and cobble beaches	<input type="checkbox"/>	Sheltered tidal flats
<input type="checkbox"/>	Exposed artificial structures	<input type="checkbox"/>	Riprap	<input type="checkbox"/>	Mixed sand and gravel beaches
<input type="checkbox"/>	Inter-tidal platforms	<input type="checkbox"/>	Exposed tidal flats	<input type="checkbox"/>	Fine-Medium sand grained beaches
<input type="checkbox"/>	Mangroves	<input type="checkbox"/>	Sheltered rocky shores	<input type="checkbox"/>	Other
<input type="checkbox"/>	Wetlands	<input type="checkbox"/>	Sheltered artificial structures		
Operational Features (tick appropriate box)					
<input type="checkbox"/>	Direct backshore access	<input type="checkbox"/>	Alongshore access	<input type="checkbox"/>	Suitable backshore staging
Other					

Appendix A2 - Bonn Agreement Oil Appearance Code

Volume Estimation - Oiled Area Measurement

- 6.1 Trials have shown that both oiled area and specific oil appearance area coverage measurement is the main source of error in volume estimation. Therefore observers should take particular care during this part of the volume estimation process.
- 6.2 Estimating or measuring the oiled area can be done either by:
- Visual estimation
 - Measurement of sensor images
- 6.3 Estimations of oiled slick area based on visual observations are likely to be less accurate than estimates based on measurements made of remote sensing images.
- 6.4 If possible, the whole slick should be visible in one image for ease of area measurement. Area calculations using accurate measurements of SLAR images will be more appropriate for large oil slicks, while measurements of UV images will be more suitable for smaller slicks.
- 6.5 Most modern SLAR systems incorporate electronic measuring devices; areas can be measured by drawing a polygon around the detected slick. It is recommended that these devices be used where at all possible as they will provide the most accurate measurement within the confines of the aircraft during flight. Alternatively the overall length and width can be measured electronically and the oiled coverage estimated visually.
- 6.6 *It should be remembered that because of the resolution of the SLAR (generally 20 metres) small areas of less than 20 metres NOT covered with oil but within the overall area would not show on the SLAR. However, oil patches of less than 20 metres will show up as patches of 20 metres.*
- 6.7 The recommended procedure for visual observation is to estimate the length and width of the slick by making time and speed calculations. This forms an imaginary rectangle that encloses the slick. The coverage of the oil slick (expressed as a percentage or proportion) within this imaginary rectangle is then used to calculate the oiled area of the slick. Inevitable inaccuracies in dimension estimates and estimated coverage within these dimensions can give rise to high levels of error in area estimation.
- 6.8 When determining the oiled area coverage it is essential to remember that the main body of an oil slick may have 'areas' of clear water, especially near the trailing edge of the slick. For compact slicks, there may be only a few 'clear water' areas but for more diffused oil slicks there could be several which would lower the overall coverage percentage significantly. More accurate assessments of the oiled area can be made by a thorough analysis of the SLAR or UV images.

Volume Estimation - Specific Appearance Area Coverage Measurement

- 6.9 The 'oiled' area should be sub-divided into areas that relate to a specific oil appearance (see BAOAC). This can be achieved using the recorded data from the vertical sensors and the noted visual observations.
- 6.10 This part of the volume estimation is mainly subjective, so great care should be taken in the allocation of coverage to appearance, particularly the appearances that relate to higher thicknesses (**discontinuous true colour and true colour**).
- 6.11 The vertical camera data (if available in flight) and the visual observations should be compared

with the IR data, which will give an indication of the thickest part of the slick.

- 6.12 Thermal IR images give an indication of the relative thickness of oil layers within a slick. Relatively thin oil layers appear to be cooler than the sea and relatively thick oil layers appear to be warmer than the sea in an IR image. There is no absolute correlation between oil layer thickness and IR image because of the variable heating and cooling effects caused by sun, clouds and airtemperature.
- 6.13 The presence of any area within the slick shown as warm in an IR image indicates that relatively thick oil (Code 4 or 5 in the BAOAC) is present. Since these areas may only be small, but will contain a very high proportion of oil volume compared to the much thinner areas, their presence should be correlated with visual appearance in the BAOAC assessment.
- 6.14 The Volume Estimation Procedure is illustrated at AnnexB.
- 6.15 It is generally considered that 90% of the oil will be contained within 10% of the overall slick (normally the leading edge (up wind side) of the slick), within a few hours after the release.

Oil Volume Estimate Usage

- 9.1 Using the BAOAC to estimate oil volume gives a maximum and minimum quantity. It is suggested that in general terms the maximum quantity should be used together with other essential information such as location to determine any required response action.

BONN CP agreed that the minimum volume estimate should be used for legal purposes. Reference is made to Bonn Agreement Contracting Parties Meeting Summary Record 2003 Page 5, Para. 2.4 (f) which states “When the BAOAC is used to estimate the quantity of oil released at sea, the lower limit of the range in the code for each coded appearance should be used for estimating the amount of oil present in the slick for enforcement purposes and for statistical reporting”. However, it is emphasised that each national authority will determine how to use the BAOAC volume data within its own area.

- 9.2 It is emphasised that extra caution should be used when applying the BAOAC during major incidents involving large quantities of thick oil and / or heavy oils or when emulsion is present. Aircrews should use all the available information or intelligence; such as oil thickness measurements taken by surface vessels, to estimate the volume.

The Bonn Agreement Oil Appearance Code

11.1 The Theory of Oil Slick Appearances

1. The visible spectrum ranges from 400 to 750 nm (0.40 – 0.75 μm). Any visible colour is a mixture of wavelengths within the visible spectrum. White is a mixture of all wavelengths; black is absence of all light.
2. The colour of an oil film depends on the way the light waves of different lengths are reflected off the oil surface, transmitted through the oil (and reflected off the water surface below the oil) and absorbed by the oil. The observed colour is the result of a combination of these factors; it is also dependant on the type of oil spilled.
3. An important parameter is optical density: the ability to block light. Distillate fuels and lubricant oils consist of the lighter fractions of crude oil and will form very thin layers that are almost transparent. Crude oils vary in their optical density; black oils block all the wavelengths to the same degree but even then there are different ‘kinds of black’, residual fuels can block all light passing through, even in thin layers.

The Bonn Agreement Oil Appearance Code

4. Since the colour of the oil itself as well as the optic effects are influenced by meteorological conditions, altitude, angle of observation and colour of the sea water, an appearance cannot be characterised purely in terms of apparent colour and therefore an ‘appearance’ code, using terms independent of specific colour names, has been developed.
5. The Bonn Agreement Oil Appearance Code has been developed as follows:
 - In accordance with scientific literature and previously published scientific papers,
 - Its theoretical basis is supported by small scale laboratory experiments,
 - It is supported by mesoscale outdoor experiments,
 - It is supported by controlled sea trials.
6. Due to slow changes in the continuum of light, overlaps in the different categories were found. However, for operational reasons, the code has been designed without these overlaps.
7. Using thickness intervals provides a biased estimation of oil volumes that can be used both for legal procedures and for response.
8. Again for operational reasons grey and silver have been combined into the generic term ‘sheen’.
9. Five levels of oil appearances are distinguished in the code detailed in the following table:

Code	Description - Appearance	Layer Thickness Interval (µm)	Litres per km ²
1	Sheen (silvery/grey)	0.04 to 0.30	40 – 300
2	Rainbow	0.30 to 5.0	300 – 5000
3	Metallic	5.0 to 50	5000 – 50,000
4	Discontinuous True Oil Colour	50 to 200	50,000 – 200,000
5	Continuous True Oil Colour	More than 200	More than 200,000

10. The appearances described cannot be related to one thickness; they are optic effects (codes 1 - 3) or true colours (codes 4 - 5) that appear over a range of layer thickness. There is no sharp delineation between the different codes; one effect becomes more diffuse as the other strengthens. A certain degree of subjective interpretation is necessary when using the code *and any choice for a specific thickness within the layer interval MUST be explained on the Standard Reporting Log.*

Description of the Appearances

Code 1 – Sheen (0.04 μm – 0.3 μm)

11. The very thin films of oil reflect the incoming white light slightly more effectively than the surrounding water (Figure 1) and will therefore be observed as a silvery or grey sheen. The oil film is too thin for any actual colour to be observed. All oils will appear the same if they are present in these extremely thin layers.

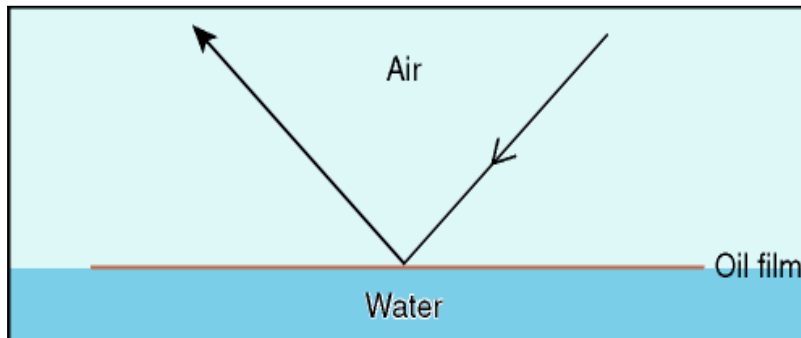


Figure 1. Light Reflecting From Very Thin Oil Films

12. Oil films below approximately 0.04-μm thickness are invisible. In poor viewing conditions even thicker films may not be observed.
13. Above a certain height or angle of view the observed film may disappear.

Code 2 – Rainbow (0.3 μm – 5.0 μm)

14. Rainbow oil appearance represents a range of colours: yellow, pink, purple, green, blue, red, copper and orange; this is caused by constructive and destructive interference between different wavelengths (colours) that make up white light. When white light illuminates a thin film of oil, it is reflected from both the surfaces of the oil and of the water (Figure 2).

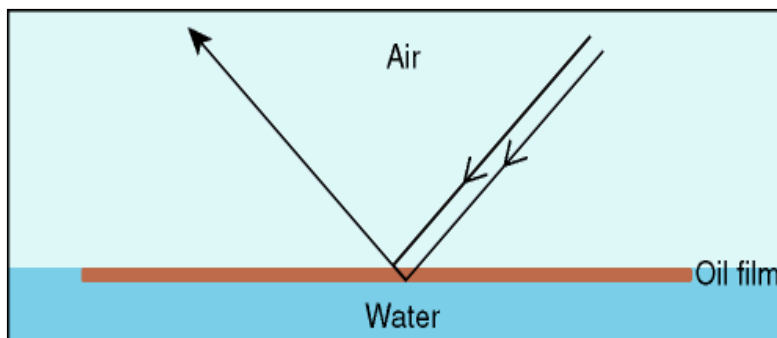


Figure 2. The Rainbow Region

15. Constructive interference occurs when the light that is reflected from the lower (oil / water) surface combines with the light that is reflected from the upper (oil / air) surface. If the light waves reinforce each other the colours will be present and brighter (Figure 3).

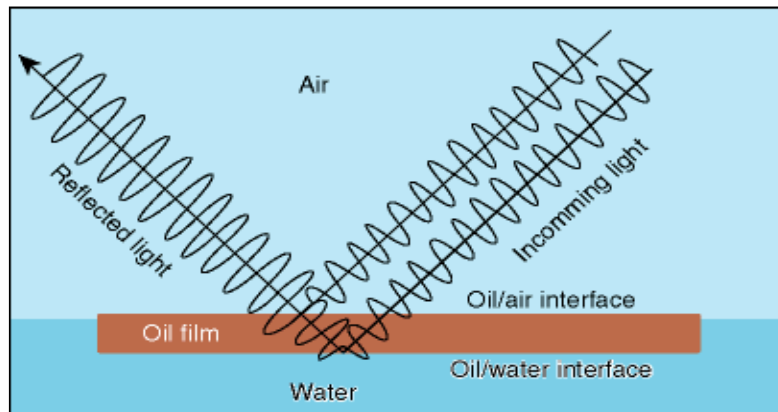


Figure 3. Constructive Interference

16. During destructive interference the light waves cancel each other out and the colour is reduced in the reflected light and appears darker (Figure 4).

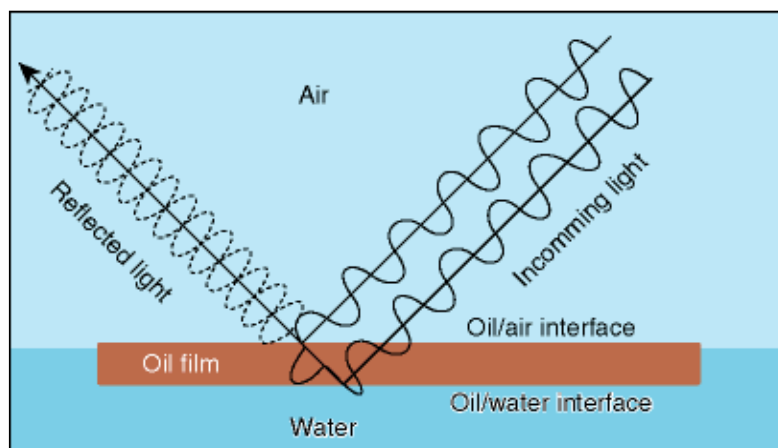


Figure 4. Destructive Interference

17. Oil films with thicknesses near the wavelength of different coloured light, $0.2 \mu\text{m}$ – $1.5 \mu\text{m}$ (blue, 400nm or $0.4 \mu\text{m}$, through to red, 700nm or $0.7 \mu\text{m}$) exhibit the most distinct rainbow effect. This effect will occur up to a layer thickness of $5.0 \mu\text{m}$.
18. All oils in films of this thickness range will show a similar tendency to produce the 'rainbow' effect.
19. A level layer of oil in the rainbow region will show different colours through the slick because of the change in angle of view. Therefore if rainbow is present, a range of colours will be visible.

Code 3 – Metallic (5.0µm – 50 µm)

20. The appearance of the oil in this region cannot be described as a general colour. The true colour of the oil will not be present because the oil does not have sufficient optical density to block out all the light. Some of the light will pass through the oil and be reflected off the water surface. The oil will therefore act as a filter to the light (Figure 5).


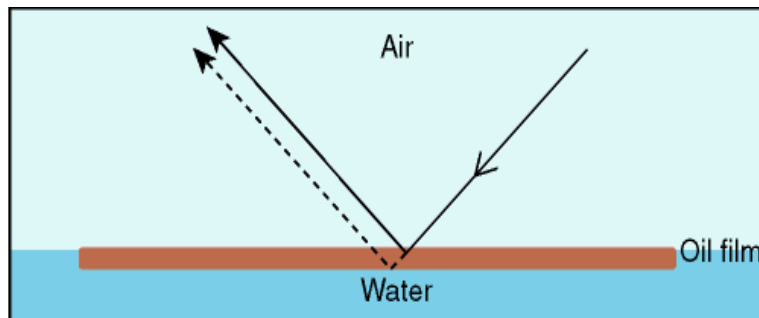


Figure 5. The Metallic Region

21. The extent of filtering will depend on the optical density of the oil and the thickness of the oil film.
22. The oil appearance in this region will depend on oil colour as well as optical density and oil film thickness. Where a range of colours can be observed within a rainbow area, metallic will appear as a quite homogeneous colour that can be blue, brown, purple or another colour. The 'metallic' appearance is the common factor and has been identified as a mirror effect, dependent on light and sky conditions. For example blue can be observed in blue-sky.

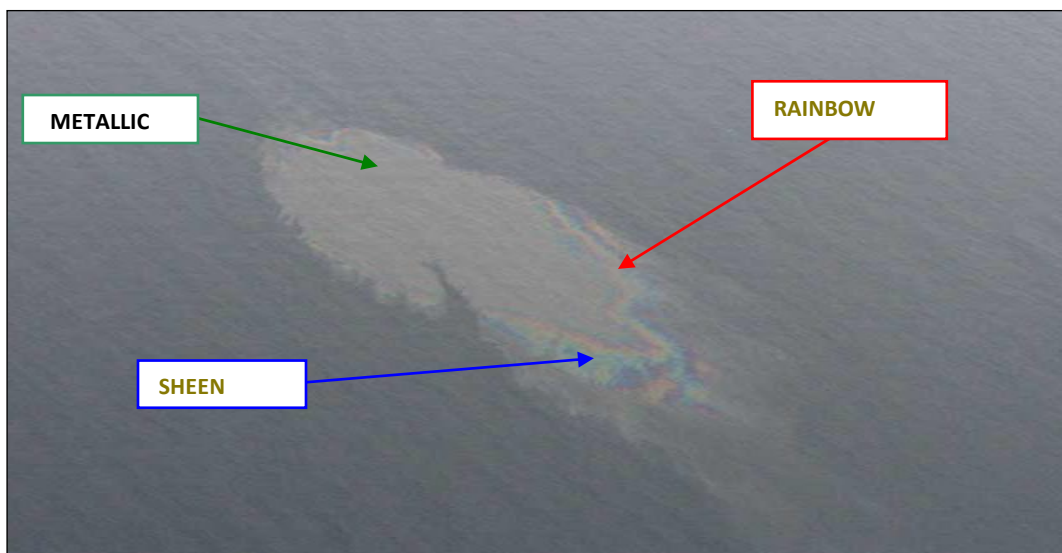

Code 4 – Discontinuous True Colours (50 µm – 200 µm)

23. For oil films thicker than 50 µm the light is being reflected from the oil surface rather than the sea surface (Figure 6).


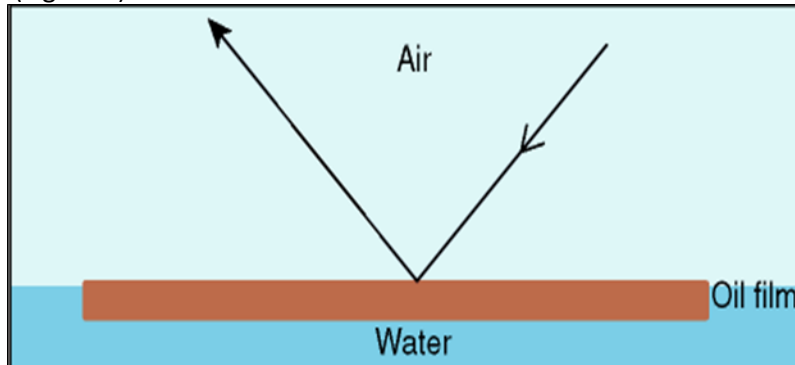


Figure 6. Thick Oil Films

24. The true colour of the oil will gradually dominate the colour that is observed. Brown oils will appear brown, black oils will appear black.
25. In this appearance category the broken nature of the colour, due to thinner areas within the slick, is described as discontinuous. This is caused by the spreading behaviour under the effects of wind and current.
26. ‘Discontinuous’ should not be mistaken for ‘coverage’. Discontinuous implies colour variations and not non-polluted areas.
27. ‘Discontinuous true colour’ appeared to be a difficult appearance to describe and through imagery it may be possible to get a clearer picture of what is meant. For now the best result of the elaborations is: **“true oil colour against a background of metallic”**.
28. When oil is moved by waves, the oil layer obviously is thicker in the wave-trough than on the wave-top. This variation of the “oil appearance” may be understood by indicating “discontinuous”.

Code 5 – True Colours (>200 µm)

27. The true colour of the specific oil is the dominant effect in this category.
28. A more homogenous colour can be observed with no discontinuity as described in Code 4.
29. This category is strongly oil type dependent and colours may be more diffuse in overcast conditions.

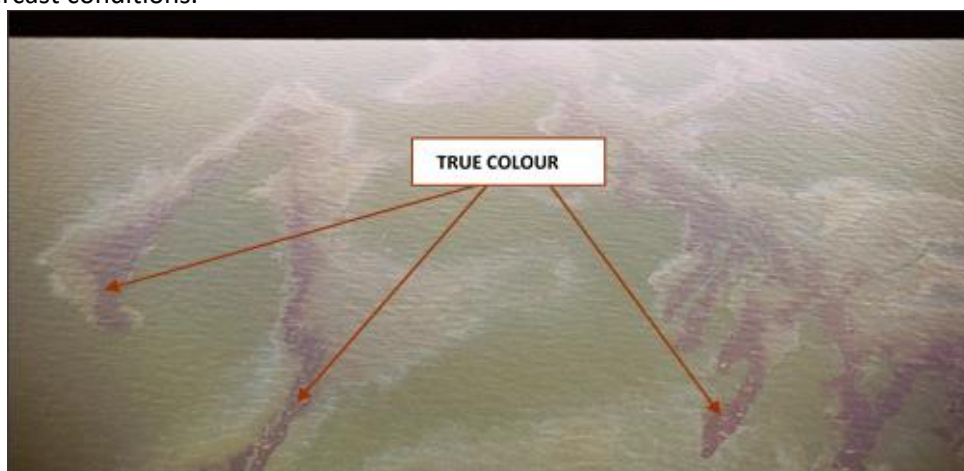

Note: all documentation on the study can be downloaded from the Bonn Agreement web-site under publications, at: www.bonnagreement.org

ANNEX A

THE VOLUME ESTIMATION PROCEDURE

1. Oiled Area Measurement

Area from SLAR Data 12 km²

Length and Width (SLAR Image or Time and Distance)

Length – 12 km x Width – 2 km (Imaginary Rectangle) Area

Covered with oil (Coverage) – 50%

Oiled Area 12 x 2 x 50% 12 km²

2. Appearance Coverage Allocation

Appearance Code 1 (Sheen) 50%

Appearance 2 (Rainbow) 30%

Appearance 3 (Metallic) 15%

Appearance 5 (True Colour) 5%

3. Thickness Band for Allocated Appearance

Sheen 0.04 µm – 0.3

µm Rainbow 0.3 µm – 5.0µm

Metallic 5.0 µm – 50 µm

True Colour More than 200
µm

4. Minimum Volume Calculation

Oiled Area x Area Covered with Specific Appearance x Minimum Thickness Appearance 1
(Sheen)

$$12 \text{ km}^2 \times 50\% \times 0.04 \text{ } \mu\text{m} = 0.24 \text{ m}^3$$

Appearance 2 (Rainbow)

$$12 \text{ km}^2 \times 30\% \times 0.3 \text{ } \mu\text{m} = 1.08 \text{ m}^3$$

Appearance 3 (Metallic)

$$12 \text{ km}^2 \times 15\% \times 5.0 \text{ } \mu\text{m} = 9 \text{ m}^3$$

Appearance 5 (True Colour)

$$12 \text{ km}^2 \times 5\% \times 200 \text{ } \mu\text{m} = 120.0 \text{ m}^3$$

Minimum Volume = 0.24 + 1.08 + 9 + 120 = 130.32 m³

6. **Maximum Volume Calculation**

Oiled Area x Area Covered with Specific Appearance x Maximum Thickness Appearance

1 (Sheen)

$$12 \text{ km}^2 \times 50\% \times 0.3 \text{ } \mu\text{m} = 1.8 \text{ m}^3$$

Appearance 2 (Rainbow)

$$12 \text{ km}^2 \times 30\% \times 5 \text{ } \mu\text{m} = 18 \text{ m}^3$$

Appearance 3 (Metallic)


$$12 \text{ km}^2 \times 15\% \times 50 \text{ } \mu\text{m} = 90.0 \text{ m}^3$$

Appearance 5 (True Colour)

$$12 \text{ km}^2 \times 5\% \times (\text{more than}) > 200 \text{ } \mu\text{m} = > 120.0 \text{ m}^3$$

$$\text{Maximum Volume} = 1.8 + 18 + 90.0 + > 120 = > 229.8 \text{ m}^3$$

Appendix A3 – Shoreline Assessment Form


Department of
Transport

Shoreline Assessment Form

This form should be submitted to the Shoreline Division Coordinator (SC). A summary of the information will be forwarded by the SC to the Operations Officer, Planning Officer and Management Support Unit.

Purpose
This form is for shoreline responders who are required to complete a shoreline assessment.

It is recommended that such responders have completed oiled shoreline training as a minimum. This form is not intended to be used in isolation.

Purpose
Human health and safety is **always** the number one priority in any incident.

Priorities
Protection priorities under Australia’s National Plan to Combat Pollution of the Sea by Oil and other Noxious and Hazardous Substances (The National Plan) are:

- Human health and safety
- Habitat and cultural resources
- Rare and/or endangered flora and fauna
- Commercial resources
- Recreational and amenity areas

Complete

- Take Five and
- Job Safety Analysis (JSA)

Prior to and as part of your operations

What is a shoreline assessment?
A shoreline assessment:

- Is a simple and comprehensive survey of a shoreline
- Provides data to enable decision making for shoreline protection, clean-up and monitoring and
- Employs a systematic approach using standardised terminology

What information needs to be gathered?

Purpose

- Shoreline description
 - Shoreline type, substrate and energy
 - Biological character of shoreline
- Oil description
- Oil location, character and behaviour

Additional information that may be required:

- Access
- Site hazards and constraints
- Sensitive areas
- Features/landmarks
- Potential sites for
 - Decontamination/waste
 - Helicopter landing

Dividing the shoreline

Sectors
Where there is a geographical barrier and restricted access between two areas, they will be split into separate sectors. Different sectors may have separate field command centres, catering, ablutions, decontamination, etc. Sectors will be further split into segments.

Segments
A segment is a piece of shoreline that’s a workable size for a team and could be defined based on:

- Shoreline type
- Substrate type
- Access points
- Features e.g. breakwater
- Jurisdiction e.g. shire boundaries
- Presence of particular flora and/or fauna
- Distance e.g. every 50m

Item Category	Item	Check
Recording	Camera	<input type="checkbox"/>
	Maps and charts	<input type="checkbox"/>
Navigation	GPS	<input type="checkbox"/>
	Compass	<input type="checkbox"/>
	Mobile phone	<input type="checkbox"/>
Communication	Radio	<input type="checkbox"/>
	Confirm phone/radio coverage	<input type="checkbox"/>
Personal	First aid kit	<input type="checkbox"/>
	Hat	<input type="checkbox"/>
	Sun-cream	<input type="checkbox"/>
	Drinking water	<input type="checkbox"/>
	Rubber boots (non-slip)	<input type="checkbox"/>
	Wet weather gear	<input type="checkbox"/>
Documentation	Field booklet	<input type="checkbox"/>
	Shoreline assessment forms	<input type="checkbox"/>
	JSA forms	<input type="checkbox"/>
	Log	<input type="checkbox"/>
Other	Tape measure	<input type="checkbox"/>
	Shovel	<input type="checkbox"/>
	Sampling kit	<input type="checkbox"/>

Ensure you advise command of your planned operation and establish reporting expectations for while you are in the field.

Objective ID: A8525747

Page 1 of 4

Shoreline descriptors:

Shoreline Type	Abbr.		Note
Cliff	Cl		Height and slope
Platform	Pl		Height relative to tide
Reef	Re		Reef is an intertidal platform
Beach	Be		
Dune	Du		
Flats	Fl		
Artificial	A		e.g. wharf, sea wall

Shoreline substrate	Abbr.	Size	Note
Bedrock or rock	R		
Boulder	B	Larger than head	
Cobble	C	Fist to head size	
Pebble	P	Pen diameter to fist size	
Gravel	G	2-4mm diameter	
Mud/silt/clay	M	Less than 0.6mm	Mix with water, if it goes cloudy = mud, if it sinks = sand
Earth	E		Usually cliffs only
Shellgrit	Sh		Usually with sand (i.e. Sh/S)
Coral	Co		Dead coral, i.e. coral rubble (if corals are live, record as coral in both substrate type and biological character)
Artificial	A		e.g. rip-rap

Note: S/B would indicate boulders and sand in equal amounts. S(B) would indicate sand was the dominant substrate.


Biological character

This is flora and fauna living on the shoreline. Document this and indicate location on sketch map.

Oil description/character

- **Colour**
- **Viscosity: Solid** (doesn't flow), **Viscous** (flow slowly), **Fluid** (flows easily)
- **Stickiness: Very sticky** (can't be wiped/washed off), **Sticky** (partly removed by wiping/washing), **Non sticky** (wipes off easily)

Percentage oil cover




Oil thickness

Name	Abbr.	Thickness	Description
Pooled	Po	Can be measured in mm or cms	Pooled fresh or emulsified oil
Cover	Co	Over 1mm	Coverage of oil of measurable thickness but not pooled
Coat	Ct	Less than 1mm	This coat of oil that masks colour of substrate and can be scratched off with fingernail.
Stain	St	Less than 1mm	Very thin stain of oil which cannot be scratched off substrate with fingernail
Film or sheen	Fi or Shn	Extremely thin film or sheen	Substrate can usually be seen through oil. Can be described as brown, rainbow or silver.
Tar balls	Tb	Variety of sizes	Ball or clumps of weathered oil.

- To describe thickness of subsurface oil:
 - o Depth = distance from substrate surface to top of buried layer
 - o Thickness of lens = distance between top and bottom of buried layer


Shoreline tidal zones

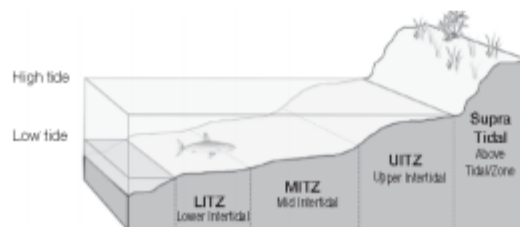

Incident				Ref No.	
REPORTING DETAILS					
Assessment Team Leader			Position/Organisation		
Team Members (name/org)					
Date Completed			Time Completed		
Reporting to			Position/Organisation		
Date Received			Time Received		
LOCATION DETAILS					
Sector			Segment		
Name of Beach/Location			Description (e.g. slope)		
Topography/Other Map			Map Reference		
Access Via	<input type="checkbox"/> Foot Only <input type="checkbox"/> Road <input type="checkbox"/> 4WD <input type="checkbox"/> Boat <input type="checkbox"/> Helicopter <input type="checkbox"/> Gator/OUV				
Hazards					
TIMING					
First Assessment	<input type="checkbox"/> Yes <input type="checkbox"/> No		Last Assessment	<input type="checkbox"/> Yes <input type="checkbox"/> No	
Timing	<input type="checkbox"/> Pre Impact <input type="checkbox"/> Post Impact Before Clean-Up <input type="checkbox"/> Post Impact After Clean-Up				
Time Since	Impact (days/hrs.):		Last Clean-up (days/hrs.):		
ASSESSMENT					
Parameter	LITZ	MITZ	UITZ	Supratidal	
Shoreline Description					
Shoreline type					
Substrate type					
Length of shoreline					
Width of shoreline					
Biological character					
Oil Distribution and Character					
Oil band length					
Oil band width					
% cover in band					
Surface oil thickness					
Oil appearance/character					
Depth of buried oil (from surface)					
Description of buried oil					
Other					
Un oiled debris					
Oiled debris					

Sketch Map

Please include North point and scale

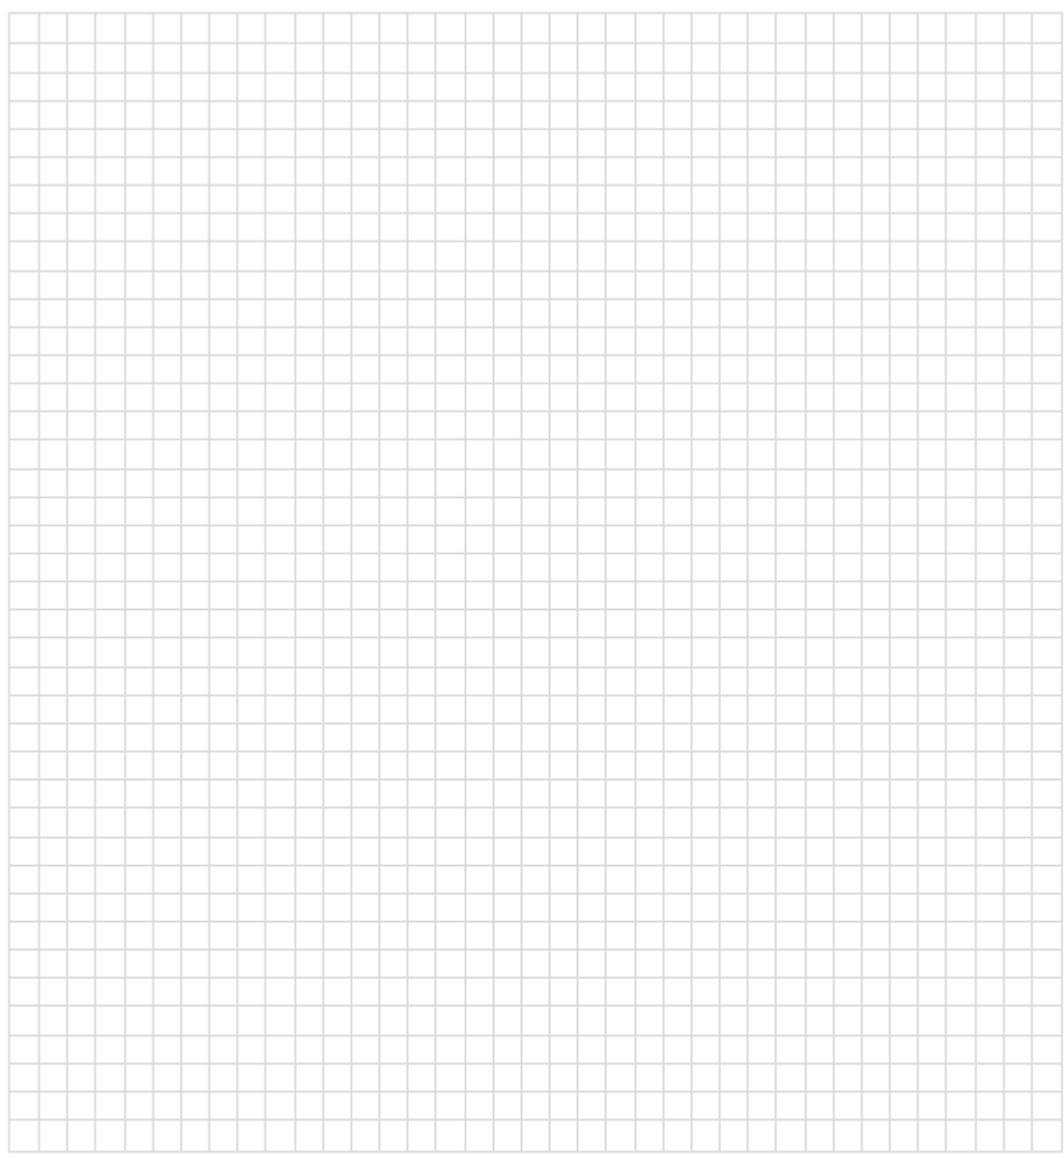

Notes

Appendix A4 – Diesel properties

DIESEL FUEL	Fresh	Weathering		
		1-3 hours	1 day	1 week
Physical Characteristics:				
API gravity (classification)	33.2 (mid distillate)			
Density (g/mL) @ 20° C	0.855	ND	0.856	0.860
Viscosity (cP) @ 20° C	3.62	ND	4.0	5.4
Interfacial Tension (mN/m)	34.5	ND	32.6	31.4
Flash Point (°C)	78.9	ND	91.1	118.3
Pour Point (°C)	6	ND	18	12
Boiling Point (°C)				
Chemical Characteristics:				
Saturates (% by weight)	63.1	ND	64.2	63.6
Aromatics (% by weight)	34.9	ND	33.4	33.7
Resins (% by weight)	1.7	ND	1.7	1.5
Asphaltenes (% by weight)	0.2	ND	0.7	1.2
Waxes (% by weight)	ND	ND	ND	4.2
Weathering:				
% loss after laboratory weathering	-	0	3	23
Persistent in the environment	moderate			
Forms oil in water emulsions	no	no	no	no
Demulsifier effective?	yes	yes	yes	yes
Toxicity (laboratory tested):				
tropical clownfish (<i>Amphiprion clarkii</i>)	low	ND	low	low
inland silverside fish (<i>Menidia beryllina</i>)	mod.	ND	low-mod.	low-mod.
tropical prawn (<i>Penaeus vannamei</i>)	mod.-high	ND	mod.-high	mod.-high
mysid shrimp (<i>Mysidopsis bahia</i>)	mod.-high	ND	mod.-high	mod.-high
sea urchin larvae (<i>Arbacia punctulata</i>)	low	ND	low	low
sand dollar/sea urchin larvae (<i>Dendraster excentricus/Strongylocentrotus purpuratus</i>)	mod.-high	ND	low	low
Amenable to Dispersant:	yes	yes	no	no

Appendix A5 – Stag Crude Assay

STAG CPF EXPORT CRUDE OIL ASSAY

conducted by



Petroleum Testing
Laboratory Refinery
Road, Lonsdale SA
5160

for

Apache Energy

PROPERTIES OF CUTS

Test	Method	Unit	LPG	BP - 230C	230 - 360C	360 - 540C	560C+	540C+
Fractional Distillation	D2892	%mass	Ni	4.9	48.2	36.4	47.0	10.6
Volume Yield	D5236	%volume	Ni	5.2	49.4	35.4	45.4	10.0
Density @15°C	D4052	kg/L		0.8788	0.9175	0.9670	0.9754	0.9937
Specific Gravity @60/60°F	D4052	-		0.8793	0.9180	0.9676	0.9760	0.9943
API Gravity	D4052	API		29.4	22.6	14.7	13.5	10.8
Aniline Point	D611	°C		51.9	54.5	62.3	68.8	
Aniline Gravity Product	Calc	-		3685	2940	2119	2103	
Ash	D482	%mass					0.0070	
Asphaltenes	IP143	%mass					0.40	
Carbon Residue - Micro	D4530	%mass					2.48	
Cetane Index - Procedure A	D4737	-			33.2			
Cetane Index - Procedure B	D4737	-			33.0			
Characterization Factor,calc	UOP 375	-					11.5	
Cloud Point	D2500	°C			<-45.0			
Colour ASTM	D1500	-			L0.5			
Copper Corrosion (3hrs @ 50C)	D130	-			1A			
FIA - Aromatic	D1319	%volume		1.8				
Freeze Point	D5972	°C		<-70.0				
Heat of Combustion - Gross,calc	D4868	MJ/kg					43.5	
Heat of Combustion - Nett,calc	D4868	MJ/kg					41.1	
Hydrocarbon - Mono-Aromatics	IP391	%mass			23.4			
Hydrocarbon - Di-Aromatics	IP391	%mass			4.8			
Hydrocarbon - Polycyclic-Aromatics	IP391	%mass			5.0			
Kinematic Viscosity @-20	D445	cSt		11.32				
Kinematic Viscosity @20°C	D445	cSt		3.476				
Kinematic Viscosity @40°C	D445	cSt		2.282	7.342			
Kinematic Viscosity @50°C	D445	cSt				200.2	675.2	
Kinematic Viscosity @100°C	D445	cSt				14.69	33.54	
Metal - Nickel	ICP-OES	wt ppm					7.2	31.4
Metal - Vanadium	ICP-OES	wt ppm					<1	<1
Nitrogen - Basic	UOP269	wt ppm					158	
Nitrogen - Total	D4629	wt ppm				830	1284	3421
PIONA (Benzene)	D6730	%volume		NA				
Pour Point	D5950	°C			<-39.0	-3.0	0.0	48.0
Smoke Point	D1322	mm		16.5				
Sulphur - Total	IP336	%mass		<0.030	0.057	0.20	0.22	0.31
Total Acid Number	D664	mg KOH/g			0.08	0.80	0.9	

Appendix A6 – Regulatory Notifications

Agency / Authority	Notification Type & Timing	Legislation / Guidance	Reporting Requirements	Responsibility	Forms
NOPSEMA Reportable Incidents					
NOPSEMA (Incident Notification Office)	Verbal notification within 2 hours Written report as soon as practicable, but no later than 3 days	<i>Petroleum & Greenhouse Gas Storage Act 2006</i> Offshore Petroleum Greenhouse Gas Storage (Environment) Regulations 2009 (as amended 2020)	A spill associated with the activity that has the potential to cause moderate to significant environmental damage ¹⁰	Jadestone IMT Planning Lead	Incident reporting requirements: https://www.nopsema.gov.au/environmental-management/notification-and-reporting/
National Offshore Petroleum Titles Administrator (NOPTA) (Titles Administrator)	Written report to NOPTA within 7 days of the initial report being submitted to NOPSEMA	Guidance Note (N-03000-GN0926) Notification and Reporting of Environmental Incidents	Spill in Commonwealth waters that is reportable to NOPSEMA	Jadestone IMT Planning Lead	Provide same written report as provided to NOPSEMA
Level 1-3 Spills					
AMSA (Rescue Coordination Centre (RCC))	Verbal notification without delay to include: <ul style="list-style-type: none"> name of ship/s involved time, type and location of incident quantity and type of harmful substance assistance and salvage measures any other relevant information Written POLREP form, within 24 hours of request from AMSA	National Plan for Maritime Environmental Emergencies	<ul style="list-style-type: none"> All slicks trailing from a vessel All spills to the marine environment All spills where National Plan equipment is used in a response	Vessel Master	Incident reporting requirements: https://www.amsa.gov.au/marine-environment/marine-pollution/mandatory-marpol-pollution-reporting Online POLREP - https://amsa-forms.nogginoca.com/public/

¹⁰ A reportable incident is defined by the OPGGS (E) Regulations as ‘an incident relating to the activity that has caused, or has the potential to cause, moderate to significant environmental damage’. For the purpose of determining whether an incident is a reportable incident, the Titleholder considers any incident that causes, or has the potential to cause, a consequence severity rating of 3 or greater to be a reportable incident.

Agency / Authority	Notification Type & Timing	Legislation / Guidance	Reporting Requirements	Responsibility	Forms
Commonwealth Department of Agriculture, Water and the Environment (DAWE) (Director of Monitoring & Audit)	Email notification as soon as practicable	<i>Environment Protection and Biodiversity Conservation Act 1999</i>	If Matters of National Environmental Significance (MNES) are considered at risk from a spill or response strategy, or where there is death or injury to a protected species	Jadestone IMT Planning Lead	N/A
Parks Australia (24 hour Marine Compliance Officer)	Verbal notification as soon as practicable	<i>Environment Protection and Biodiversity Conservation Act 1999</i>	All actual or impending spills which occur within a marine park or are likely to impact on an Australian marine park	Jadestone IMT Planning Lead	Not applicable, however the following information should be provided: <ul style="list-style-type: none"> • Titleholder's details • Time and location of the incident (including name of marine park likely to be affected) • Proposed OPEP response arrangements • Details of the relevant IMT contact person.
Australian Fisheries Management Authority (AFMA)	Verbal phone call notification within 8 hours		<ul style="list-style-type: none"> • Fisheries within the environment that may be affected (EMBA) • Consider a courtesy call if not in exposure zone 	Jadestone IMT Planning Lead	N/A
Western Australia Waters					
WA Department of Transport (WA DoT) (Maritime Environmental)	Verbal notification within two hours Follow up with Pollution Report (Appendix C) as soon as practicable after verbal notification	Emergency Management Regulations 2006	Notify of actual or impending Marine Pollution Incidents (MOP) that are in, or may impact, State waters. Emergency Management Regulations 2006 define MOP as an actual or	Jadestone IMT Planning Lead	WA DoT POLREP (Appendix C): https://www.transport.wa.gov.au/mediaFiles/marine/MAC-F-PollutionReport.pdf

Agency / Authority	Notification Type & Timing	Legislation / Guidance	Reporting Requirements	Responsibility	Forms
Emergency Response (MEER) Duty Officer)	If requested, submit Situation Report (Appendix D) within 24 hours of request	State Hazard Plan: Maritime Environmental Emergencies Offshore Petroleum Industry Guidance Note – Marine Oil Pollution: Response and Consultation Arrangements	impending spillage, release or escape of oil or an oily mixture that is capable of causing loss of life, injury to a person or damage to the health of a person, property or the environment.		WA DoT SITREP (Appendix D): https://www.transport.wa.gov.au/mediaFiles/marine/MAC-F-SituationReport.pdf
WA Department of Mines, Industry Regulation and Safety (DMIRS) (Petroleum Environment Duty Officer)	Verbal phone call within 2 hours of incident being identified Follow up written notification within 3 days	Guidance Note on Environmental Non-compliance and Incident Reporting	A spill incident associated with the activity that has the potential to cause an environmental impact that is categorised as moderate or more serious than moderate ¹	Jadestone IMT Planning Lead	Environmental and Reportable Incident/ Non-compliance Reporting Form http://www.dmp.wa.gov.au/Environment/Environment-reports-and-6133.aspx
Department of Biodiversity Conservation and Attractions (State Duty Officer)	Verbal notification within 2 hours	Western Australian Oiled Wildlife Response Plan	Notify if spill has the potential to impact or has impacted wildlife in State waters (to activate the Oiled Wildlife Advisor)	Jadestone IMT Planning Lead	N/A
Department of Primary Industry and Regional Development (DPIRD) Fisheries	Verbal phone call notification within 8 hours		Fisheries within the EMBA Consider a courtesy call if not in exposure zone	Jadestone IMT Planning Lead	N/A
Department of Water and Environmental Regulation (DEWR) Pollution Watch Hotline	Next working day		Courtesy call to advise of pollution incident	Jadestone IMT Planning Lead	N/A

Appendix A7 - Incident Management Guidance

The purpose of this section is to provide guidance on the implementation and management of emergency response at Jadestone Energy with respect to the Stag facility. This section summarises the key aspects of the Incident Management Team Response Plan (IMTRP) (JS-70-PLN-F-00008). For further details of Jadestone incident management team, refer to the IMTRP.

1. Purpose

The purpose of the Incident Management Team Response Plan (IMTRP) is to provide the Jadestone Energy (Australia) Pty Ltd, (JSE) organisation with the necessary information to respond to incidents affecting operations or business interruptions.

2. Scope

The scope of the IMTRP covers incidents involving facilities, offices or sites operated by Jadestone and where Jadestone has responsibility for organising incident and/or emergency response. It outlines incident activation procedures, incident management structures, communication arrangements, emergency response roster arrangements, information management procedures during incidents and IMT training and competency requirements.

3. Principles

Jadestone aligns with Australian Inter-Service Incident Management System (AIIMS) arrangements and uses five fundamental principles to guide and test the organisations incident management systems against:

- **Flexibility** – ensuring that the system can be applied across the full spectrum of incidents and hazards associated with Jadestone operations and activities;
- **Management by objectives** – the clear determination and communication of desired outcomes (objectives) to ensure that all parts of the incident management system understand the direction being taken;
- **Functional management** – the ability to delegate defined tasks across to groups able to effectively undertake actions in support of achieving objectives;
- **Unity of command** – the principle of management where there is a single Incident Controller providing direction and coordinating all actions; and
- **Span of control** – management of the number of individuals/groups within the structure that can be effectively supervised by one person.

Risk Management, Crisis and Incident Management and Business Continuity Management are a seamless continuum. Within Jadestone a high level of planning, preparation and practice is maintained through:

- **procedures and guidance** to manage and coordinate incidents;
- implementation and use of **incident response systems**;
- **training and management of competencies** across all elements of incident response;
- **drills and exercises** to test procedures / systems and to maintain competency; and
- **audits and inspections** of systems and capabilities.

Continuous improvement is also a vital part of the organisations incident management system. All opportunities to identify, capture and effectively “learn” from lessons are recommended and there is a continual drive to improve our ability to prepare for, respond to and recover from any incident that is experienced.

4. Define the spill level

Jadestone uses a tiered response framework which classifies incidents based on the significance of the consequences, the risks involved and potential for escalation. The significance of the incident determines the level of response that is activated.

Incident response personnel are trained to respond according to the characteristics of the response level. Table A7-1 provides an overview of the characteristics and escalation criteria for each level and how each level aligns to the incident levels in the National Plan for Environmental Emergencies (AMSA 2020).

Following an oil spill incident, it is important to assess the nature and potential of spill to respond appropriately. The Offshore Installation Manager (OIM) or Vessel Master, is required to make the initial assessment of the spill, which should then be confirmed with the IMT Leader. If the Incident Management Team is activated, the IMT Leader is responsible for ongoing re-assessment of spill level.

In the event of a spill occurring where an effective response is considered beyond the capabilities within a level, the response will be escalated immediately to the next level. The decision to escalate a response to a higher level (as defined in Table A7-1) will be made by the responsible Control Agency. If the response level is undetermined, then a worst-case scenario should be assumed when activating resources, as it is always possible to scale down the response effort.

The level of the oil spill incident is to be recorded in the IMT Incident Log following activation.

Table A7-1 below is to be used by the OIM and IMT Leader when determining the level of the oil spill incident.

Table A7-1: Spill Level Assessment

Characteristic	Incident management response level		
	Level 1	Level 2	Level 3
General description and escalation criteria	An incident which will not have an adverse effect on the public or the environment which can be controlled using resources normally available at the facility or vessel concerned without the need to mobilise the Jadestone IMT or other external assistance.	An incident that cannot be controlled using facility resources alone and requires external support and resources to combat the situation OR An incident that can be controlled by the facility but which may have an adverse effect on the public or the environment.	An incident which has a wide-ranging impact on Jadestone and may require the mobilisation of external State/Territory, National or International resources to bring the situation under control.
AMSA National Plan levels and escalation criteria	Level 1 Generally able to be resolved by Responsible Party through the application of local or initial response resources (first strike response)	Level 2 Typically, more complex in size, duration, resource management and risk than Level 1 incidents. May require deployment of resources beyond the first strike response	Level 3 Characterised by a high degree of complexity, require strategic leadership and response coordination. May require national and international response resources
Resources at risk			
Human	Potential for serious injuries	Potential for loss of life	Potential for multiple loss of life

Characteristic	Incident management response level		
	Level 1	Level 2	Level 3
Environment	Isolated impacts or with natural recovery expected within weeks.	Significant impacts and recovery may take months. Monitoring and remediation may be required.	Significant area and recovery may take months or years. Monitoring and remediation will be required.
Wildlife	Individuals of a small number of fauna species affected	Groups of fauna species or multiple numbers of individuals affected	Large numbers of fauna (individuals and species) affected
Economy	Business level disruption	Business failure	Disruption to a sector
Social	Reduced services	Ongoing reduced services	Reduced quality of life
Infrastructure	Short term failure Non-safety/operational critical failure	Medium term failure Potentially safety/operational critical failure	Severe impairment Safety/operational critical system failure
Public affairs	Local and regional media coverage	National media coverage	International media coverage

5. Interface with External Plans

Jadestone oil spill response arrangements have been developed to meet all relevant requirements of the OPGGS (E) Regulations. It is consistent with the national system for oil pollution preparedness and response; the National Plan for Maritime Environmental Emergencies managed by the Australian Maritime Safety Authority (AMSA); and the WA Department of Transport (WA DoT) Industry Guidance Note (September 2020) for offshore oil spill response and consultation.

Table A7-2 summarises regulatory involvement in spill scenarios from Jadestone Facilities.

Table A7- 2: Jurisdictional and Control Agencies for Hydrocarbon Spills for Commonwealth & International Waters

Jurisdictional boundary	Spill source	Hazard Management Agency	Jurisdictional authority	Control agency		Relevant documentation
				Level 1	Level 2/3	
Commonwealth waters (three to 200 nautical miles from territorial/state sea baseline)	Vessel ¹¹	N/A	AMSA	AMSA		Vessel Ship Oil Pollution Emergency Plan National Plan
	Petroleum activities ¹²	N/A	NOPSEMA	Jadestone		Activity OPEP

Information from the following external documents have been used or referred to within this document:

¹¹ Vessels are defined by Australian Government Coordination Arrangements for Maritime Environmental Emergencies (AMSA, 2017) as a seismic vessel, supply or support vessel, or offtake tanker.

¹² Includes a 'Facility', such as a fixed platform, FPSO/FSO, MODU, subsea infrastructure, or a construction, decommissioning and pipelaying vessel. As defined by Schedule 3, Part 1, Clause 4 of the OPGGSA 2006.

- AMOSPlan – Australian Industry Cooperative Spill Response Arrangements
- National Plan – National Marine for Maritime Environmental Emergencies
- State Hazard Plan (– Western Australia State Hazard Plan: Maritime Environmental Emergencies
- WAOWRP – Western Australia Oiled Wildlife Response Plan

5.1 AMOSPlan

The AMOSPlan is a voluntary mutual aid plan which is administered and funded by the oil industry through AMOSC. The principle of the AMOSPlan is that, to assist in a local response to an incident, individual company resources are available under co-operative arrangements through the AMOSC hiring agreements. Jadestone is a participating company of AMOSC and as such has access to AMOSC's Level 2 and 3 oil spill recovery and response equipment, dispersant and technical (human) capabilities, as outlined in the AMOSPlan. AMOSC manages a core group of personnel for oil spill response that can be made available for Jadestone requirements, as outlined in Jadestone's Master Service Contract with AMOSC.

5.2 National Plan

A Memorandum of Understanding (MOU) has been established between Jadestone and AMSA, outlining respective roles and responsibilities when responding to vessel-sourced marine pollution incidents and petroleum activity related marine pollution incidents.

AMSA manages the National Plan for Maritime Environmental Emergencies (National Plan), Australia's key maritime emergency contingency and response plan. All resources under the National Plan are available to Jadestone through request to AMSA under the arrangements of the MoU.

For any oil pollution event, Jadestone Energy agrees to notify AMSA immediately in the interests of facilitating the most efficient and effective response to the incident.

In the instance of vessel sourced marine oil pollution events, Jadestone Energy has agreed with AMSA that:

- AMSA is the designated Control Agency for oil spills from vessels within the Commonwealth jurisdiction. Upon notification of an incident involving a ship, AMSA will assume control of the incident and respond in accordance with the National Plan;
- The National Plan and its supporting documents provide direction for the operational management and response of ship-sourced incidents; and
- AMSA is to be notified immediately of all ship-sourced incidents through RCC Australia.

Jadestone acknowledges that in addition to marine pollution incidents, AMSA has specific national interest responsibilities regarding the management of maritime casualties (as defined within the National Plan for Maritime Environmental Emergencies and International Convention on the High Seas in Cases of Oil Pollution Casualties) and specifically regarding the application of the Protection of the Sea (Powers of Intervention) Act 1981. AMSA and Jadestone Energy agree to work cooperatively to manage maritime casualty incidents in accordance with the arrangements within the National Plan for Maritime Environmental Emergencies.

AMSA will coordinate the resources of the National Plan for Maritime Environmental Emergencies on the formal request of the IMT Leader. Jadestone agrees to provide all available support to AMSA in AMSA's performance of its Control Agency responsibilities.

The AMSA National Plan Policy number NP-POL-003 National Plan Incident Management System describes the incident management system which is applied by AMSA, State Control Agencies and the offshore industry Australia wide for all marine oil spill response incidents and implemented through the National Plan for Maritime Environmental Emergencies. The Jadestone Incident Management System is based on AIIMS which is consistent with the AMSA system.

5.3 WA DoT & State Hazard Plan (MME)

The State Emergency Management Plan enables the Western Australian Government to prevent, prepare for, respond to and recover from hazards as listed in the *Emergency Management Act 2005 (WA)* and prescribed in the Emergency Management Regulations 2006 (the EM Regulations).

The State Emergency Management Committee (SEMC) is the body with overall responsibility for emergency planning. SEMC is responsible for the development and review of several emergency plans for the Department of Transport.

These include:

- *State Hazard Plan: MEE.*

Other State Hazard Plans include:

- *State Hazard Plan: Persons lost or in distress requiring a Search and Rescue response (Search and Rescue Emergency)*

The State Hazard Plan - MEE covers:

- Prevention and mitigation responsibilities and strategies .
- Responsibilities for preparedness and planning arrangements.
- Responsibilities and arrangements for responding to maritime emergencies.
- Information on recovery arrangements.

Copies of the WA State Hazard Plans can be found at: <https://semc.wa.gov.au/emergency-management/plans/state-hazard-plans>

Table A7-3 Western Australian DoT Response Requirements

Jurisdictional boundary	Spill source	Hazard Management Agency	Jurisdictional authority	Control agency	
				Level 1	Level 2/3
Western Australian	Vessel #	WA DoT	WA DoT	WA DoT	WA DoT
	Petroleum activities*	WA DoT	WA DoT	Jadestone	WA DoT

If a Level 2/3 spill arises within, or has potential to enter Western Australian State waters, the HMA (DoT Chief Executive Officer or delegate) will take on the role as the State Maritime Pollution Coordinator (SMPC) and DoT will take on the role as a Controlling Agency.

Jadestone Energy will notify the DoT Maritime Environmental Emergency Response (MEER) unit as soon as reasonably practicable (within 2 hours of spill occurring). On notification, the HMA will activate their Maritime Environmental Emergency Coordination Centre (MEECC) and the DoT Incident Management Team (IMT). Relevant State Response Team members would also be activated by DoT.

Jadestone is required to work in coordination with DoT during such instances, as outlined within the DoT’s *Offshore Petroleum Industry Guidance Note – Marine Oil Pollution: Response and Consultation Arrangements (July 2020)*.

For Level 2 spills that cross from Commonwealth waters to State waters, there will be two Controlling Agencies. Jadestone will retain Control Agency responsibility for Commonwealth waters, whilst DoT will assume Control Agency responsibility for the portion of the response in State waters. For a cross-jurisdictional response, there will be a Lead IMT (DoT or Jadestone) for each spill response activity. Appendix 2 within *Offshore Petroleum Industry Guidance Note – Marine Oil Pollution: Response and Consultation Arrangements (July 2020)* provides guidance on the allocation of a Lead IMT to response activities for a cross jurisdictional spill. Figure A7-1 shows the cross jurisdictional arrangements and Control Agency structure for a Facility spill entering State waters.

To facilitate effective coordination between the two Controlling Agencies and their respective IMT’s during a cross-jurisdictional response, a Joint Strategic Coordination Committee (JSCC) will be established. The JSCC will be jointly chaired by the SMPC and Jadestone’s nominated senior representative and will comprise of individuals deemed necessary by the chairs to ensure an effective coordinated response across both jurisdictions. Additional detail on the JSCC’s key functions are outlined in *Offshore Petroleum Industry Guidance Note – Marine Oil Pollution: Response and Consultation Arrangements (July 2020)*.

At the request of the SMPC, Jadestone Energy will be required to provide all necessary resources, including personnel and equipment, to assist the DoT’s IMT in performing duties as the Controlling Agency for State waters response. This includes providing an initial 11 personnel to work within the DoT Incident Control Centre located at Marine House, Fremantle, no later than 8 am following the day of the request. It also includes providing personnel to serve in DoT’s Forward Operating Base no later than 24 hours following formal request by the SMPC. The roles and responsibilities of these positions are outlined in Table A7-9.

As a minimum, the Deputy Planning Officer and Deputy Logistics Officer supporting the WA DoT IMT will be filled by Jadestone IMT personnel familiar with relevant Jadestone systems and processes and trained as per role specific training and competency requirements outlined in Table A7-11.

Two DoT personnel will be provided from DoT’s command structure into Jadestone’s GCT/ IMT as GCT/ Media Liaison Officers. The roles and responsibilities of these roles are outlined in Table A7-10.

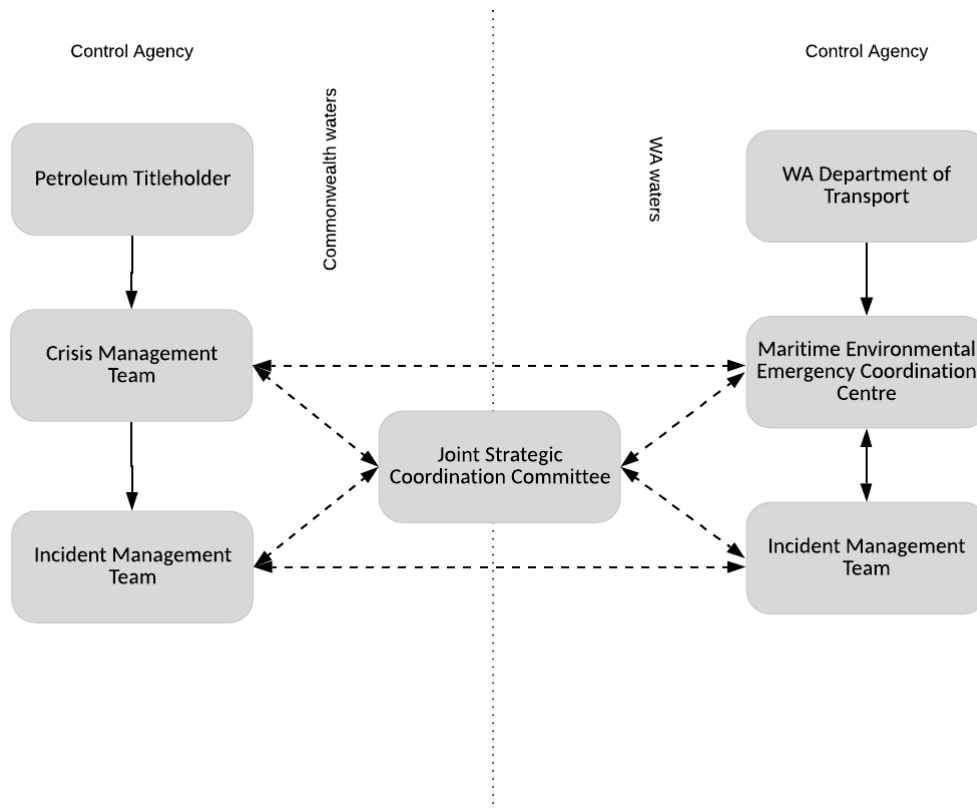


Figure A7- 1: Cross Jurisdictional Control Agency Arrangements (WA waters)

6. Risks

The Jadestone incident management process is based around the organisation being able to understand and respond to all hazards, natural and human-induced incidents, including those which may not have been experienced by the organisation. Hazards and safeguards are identified and recorded within respective risk registers. Potential causes and preventative measures are identified for each hazard; qualitative assessments of the consequences and likelihood are undertaken, and detection, protection, mitigation and recovery systems are defined.

In addition, the risk management process will also define and describe the following:

- Major Accident Events (MAE);
- Safety Critical Elements (SCE); and
- Performance Standards (PS).

7. Incident Management Structure

Jadestone utilizes a tiered incident response structure to deal with and manage “incidents” associated with each of the organisation’s risks. This structure is activated progressively, from business as usual, facility-based Incident Response Team (IRT), shore-based Incident Management Team (IMT), then if required to the corporate Group Crisis Team (CGT).

The incident management process and structure support all of Jadestone’s activities and provides guidance to the IMT when activated. Figure A7-2 illustrates this structure and the primary areas of focus at each level.

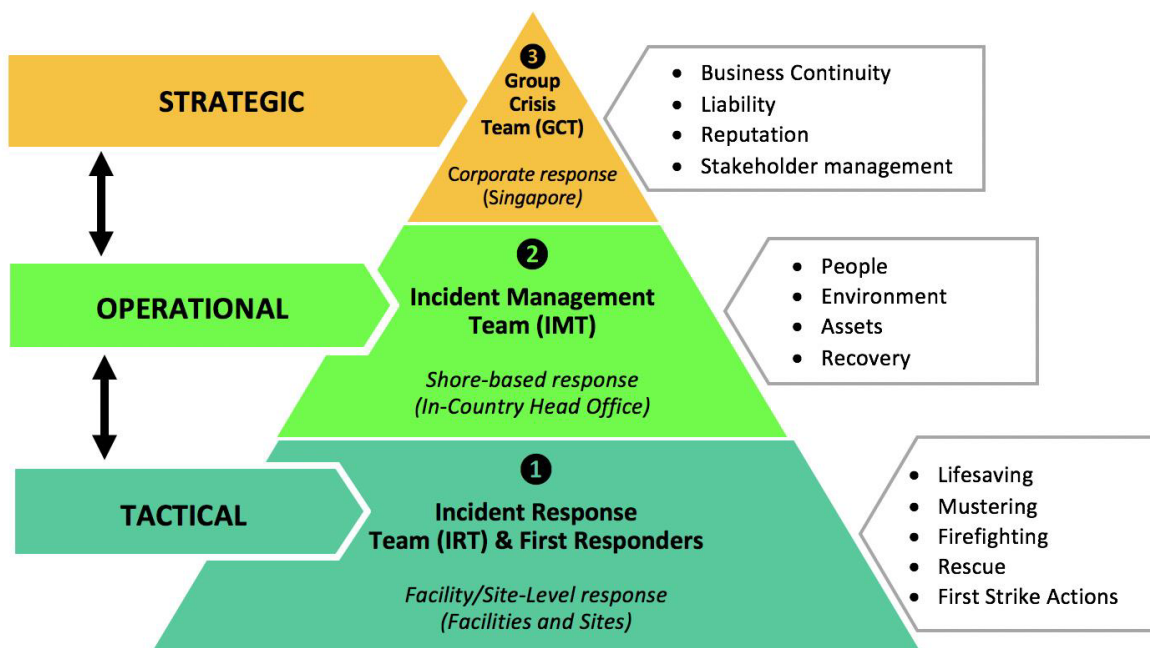


Figure A7-2 : Jadestone Incident Response Structure

The Jadestone incident response structure is based on the Australasian Inter-Service Incident Management System (AIIMS), which consists of a standard management hierarchy and procedures for managing incidents of any size. The use of AIIMS principles drives consistent response operations through a set of common terminology, procedures and processes to:

- Organise personnel and skills necessary for a safe, secure and compliant response;
- Allow personnel from a wide variety of agencies to meld rapidly into a common management structure; and
- Provide a unified, centrally authorised emergency organisation.

7.1 Incident Response Team– Tactical Level

The Incident Response Team (IRT) and First Responders function at the tactical level and are responsible for the provision of immediate response to incidents in order to preserve safety of life, minimise damage (where possible) to the environment and protect property or assets.

Each facility/site/office will have a tactical level capability responsible for dealing with any emergency or hazard that may be foreseen as a function of its operations and to provide basic first aid and account for personnel. In addition, communicating of information will be a key requirement from the tactical level

upwards to ensure that all levels within the are able to build and maintain situational awareness and provide

Offshore Facility emergencies and incidents will be managed and coordinated by an On-Scene Commander (OSC); usually supported by an Incident Controller (IC) – *specific details relating to the Incident Response Team (IRT) is contained within respective facility response procedures or plans.*

guidance and/or support as necessary.

7.2 Incident Management Team – Operational Level

An operational level response, and an IMT will generally be required for the following:

- To provide additional support to an IRT (facility or site) during an incident; or
- To develop and implement response actions/plans when an incident escalates to a level that the IRT can no longer effectively manage or coordinate response activities (example: Level 2/3 oil spill incident).

The IMT is led by the IMT Leader, who will lead the IMT to address the organisations “key priorities”. The IMT is responsible for coordinating operational advice and functional support to the IRT and early liaison/notification of the Group Crisis Team (GCT) and external authorities if required.

The IMT will develop and implement operational plans to mitigate or respond to the incident and provide technical and logistic support as required.

7.3 Group Crisis Team – Strategic Level

Strategic level responses support the management of significant events that threaten the organisation and its stakeholders. At Jadestone these types of incidents will be managed by the Group Crisis Team (GCT); whose primary objectives will be to:

- Develop strategies and plans to manage reputation, operability, licence to operate, liabilities and/or potential financial loss;
- Provide technical, operational and communications advice to the in-country IMT and ensure it is adequately resourced;
- Identify, monitor, prioritise and manage domestic and global issues, gaining a deep understanding of perceptions and expectations of response and behaviour;
- Liaise and interface with high level government agencies including host country government authorities and elected/appointed political leaders; and
- Review and approve external and internal engagement strategies/plans and statements at global and country levels.

8. Incident Management

Effective incident management requires the ability to establish command and control, gain and maintain situational awareness and then develop, implement and monitor response activities either in support of a Jadestone facility/site or directly.

The Jadestone incident management system defines and standardises the organisational processes and structures to enable transition from reactive to proactive and ensure integration of the organisation and all other stakeholders while promoting successful incident management and coordination.


The IMT Leader will decide whether a full or partial mobilisation is required depending on the nature of the incident and the level of support required by the OSC during the initial period of the incident. The standard Jadestone incident management organisational structure is shown in Figure A7-3.

In support of response operations, an Incident Control Centre (ICC) will be established within the Jadestone Offices in Perth. The ICC will have adequate facilities for the IMT to function and coordinate response operations. The main conference room shall be the ICC with meeting rooms used as breakout for backup as required.

Jadestone utilises an electronic platform to provide all IMT personnel with universal access to key emergency management documents that may be required in the event of a spill (e.g. IMTRP, OPEPs, ICS forms). This system is also directly linked to Jadestone's Electronic Document Management System (EDMS).

Jadestone will also consider the activation of regional operational centre or a Forward Operations Base (FOB) to assist with oil spill response. The location of a regional operational centre or FOB will depend upon the nature, direction and extent of any spill. The preferred regional operational centre or FOB would be Dampier.

In accordance with the Jadestone IMT structure, the FOB will be subordinate to the IMT Operations function, and will be responsible for the coordination of personnel, resources, material, equipment and localised activities as directed by the IMT.

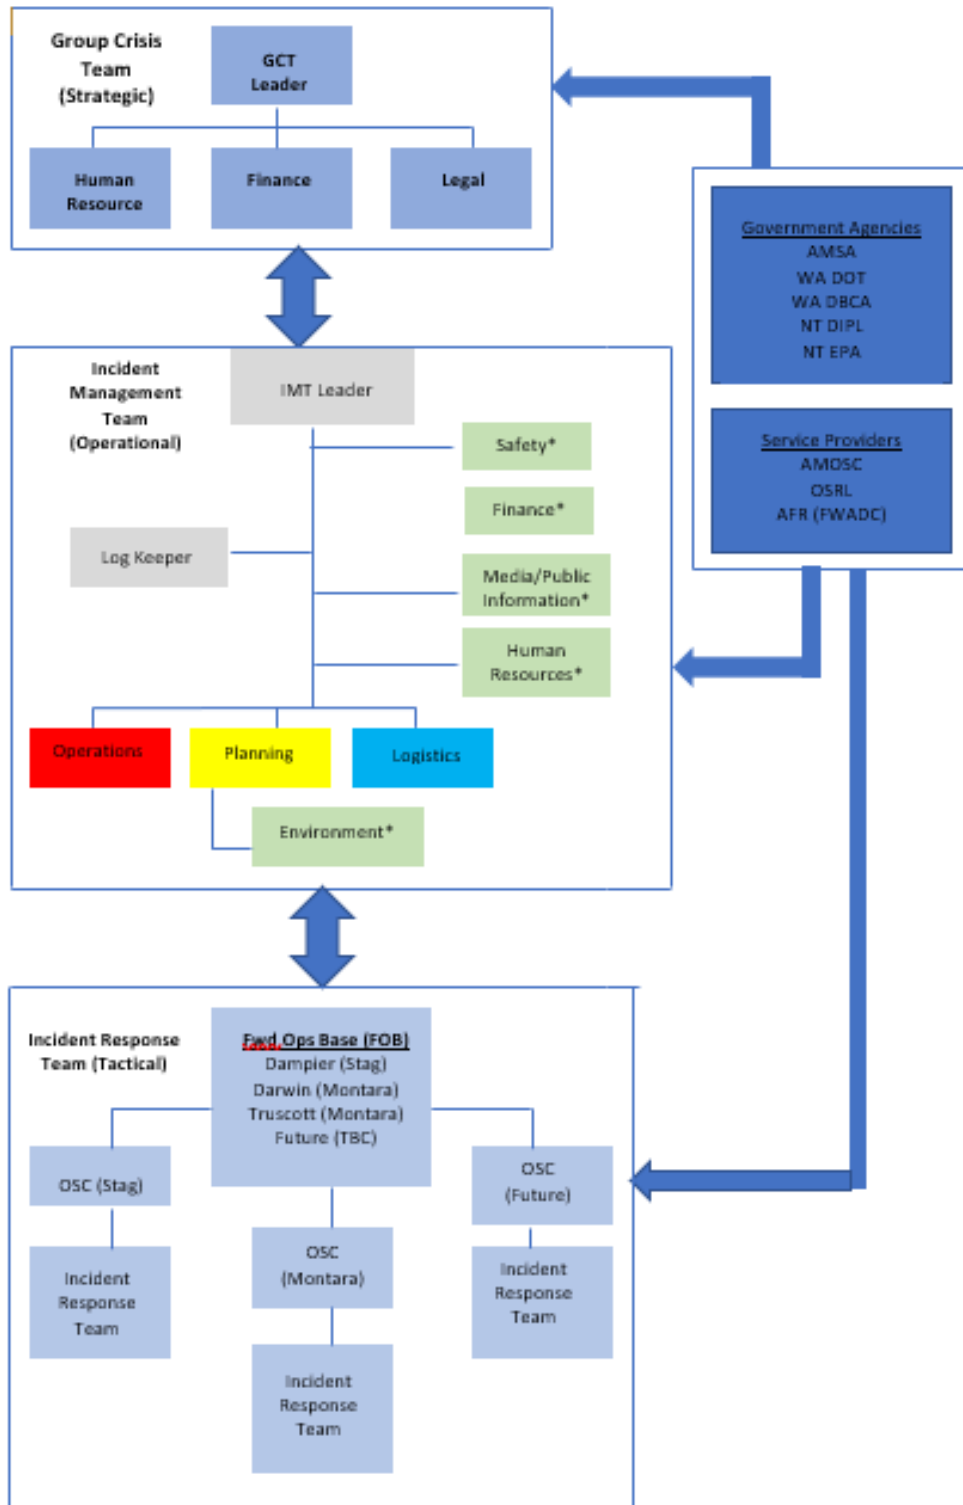

***Note: Key support functions to the IMT (Environment, Safety, HR, Finance and Public Information) are activated if required and coordinated by a suitable qualified/competent lead or outsourced to a third-party provider**

Figure A7-3: Jadestone Incident Management Structure

8.1 IMT Activation Process

The notification and activation of IMT members is by direct telephone call to the individual, following declaration by the IMT Leader. The IMT Leader will specify the location and the time at which the team is to convene. The activation process is illustrated in Figure A7-4.

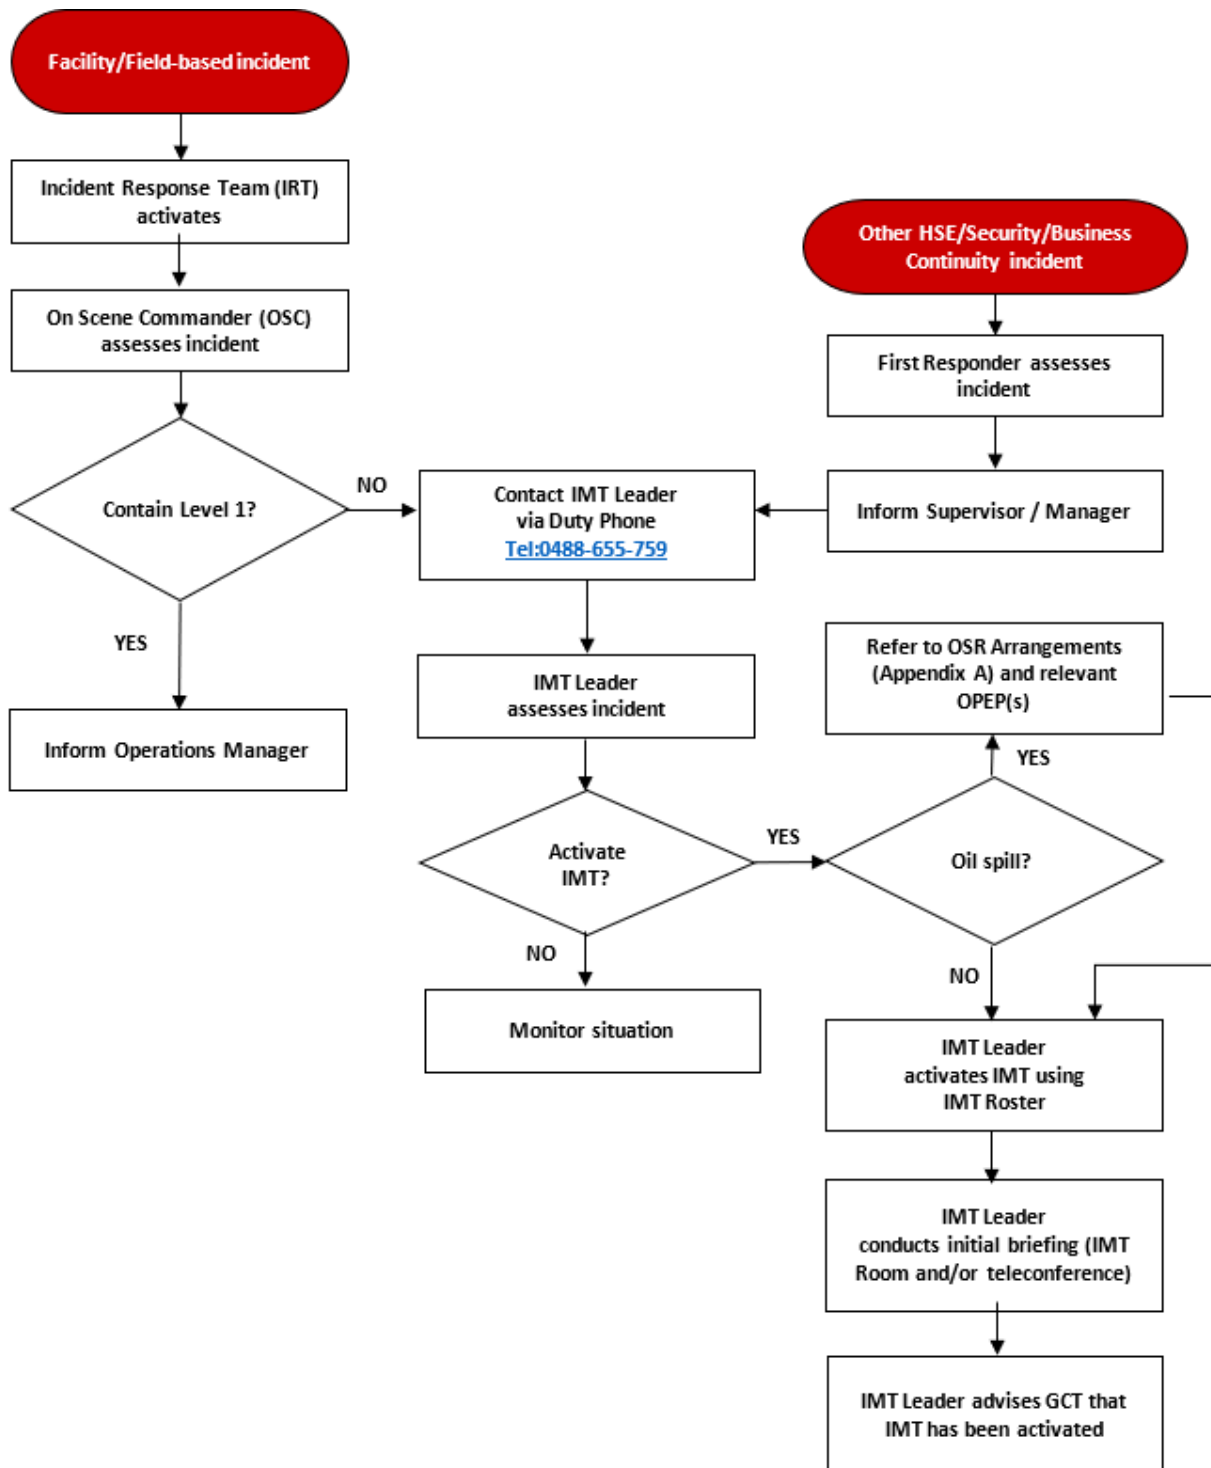


Figure A7-4: Incident activation process

8.2 Forward Operating Base (FOB)

In the event of a major incident, it is intended that facilities to support the Command & Control of response operations will be required in designated locations relevant to the respective Jadestone operation or location of the incident. Depending on the nature and scale of the incident, a Forward Operating Base (FOB) can be established in close proximity to the incident. The generic structure for the establishment of an FOB will be as shown in Figure A7-5.

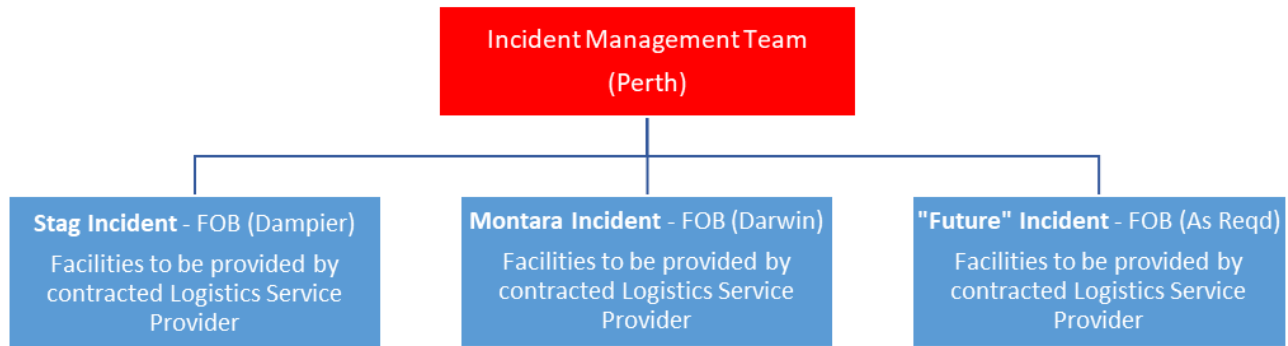


Figure A7-5: Guidance on the establishment of an FOB for an incident

The following facilities and services will be required to support the establishment of the FOB:

<p><u>Forward Operating Base</u> Supported by the Jadestone contracted logistic service provider (Dampier)</p>	<ul style="list-style-type: none"> • Conference room facilities for briefings/meetings • Telephone/Video conference capability • Communication facilities (radio/sat phone) • Break-out room facilities • Provision of internet/Wi-Fi access • Ability to access Jadestone IMS • Catering and domestic services • Access to logistical lay-down area • Access to marine/port service providers
--	---

In accordance with the Jadestone IMT structure, the FOB will be subordinate to the IMT Operations function, and will be responsible for the coordination of personnel, resources, material, equipment and localised activities as directed by the IMT.

A dedicated communication strategy in support of response operations will also be developed to support the functionality of the FOB.

FOB Integration with State - Depending on the nature of the incident, the FOB may be co-located with a State FOB activated in response to the incident. Information with respect to cross-jurisdictional arrangements are provided in the IMTRP Appendix A.

Personnel requirements to support the functionality of the FOB will be determined at the time and will be based around the nature of the incident, location and any requirements associated with State interaction.

8.3 IMT and FOB External Support Arrangements

The IMT Leader may activate external support if required, to assist with Jadestone incident response activities. Support to the IMT and/or FOB can be provided by the external agencies/organisations listed in Table A7-4.

Table A7-4 External support agencies/organisations for the IMT

Organisation	Types of services available	Arrangement
Australian Marine Oil Spill Centre (AMOSOC)	Oil spill response resources (IMT/FOB staff, equipment, technical advice) – Australian based	Master Service Contract
Oil Spill Response Ltd (OSRL)	Oil spill response resources (IMT/FOB staff, equipment, technical advice) – Internationally based	Master Service Contract
Other Operators	Trained personnel in support of IMT/FOB (Mutual Aid)	AMOS Plan
Environmental Support Provider	Implementation of the Scientific Monitoring Plan (oil spill response)	Contract
Aviation Service Provider	Provision and coordination of aviation support	Contract
Transport Service Provider	Provision of logistical support (road transport)	Contract
Waste Contractor	Provision of waste management support	Contract
Australian Maritime Safety Authority (AMSA)	Access to National Plan resources (personnel, equipment, technical advice) for oil spill response	MOU
Oceanering	Specialist technical services to support deployment and operation of the Sub-Sea First Response Tool Kit and dispersant injection	OTA Agreement
Wild Well Control	Specialist technical services to support planning and conduct of well blow out operations	OTA Agreement

9. IMT Roles and Responsibilities

The following tables (Tables A7-5 to Tables A7-8) describe the roles and responsibilities of IMT Lead roles. Specific information relating to the Group Crisis Team (GCT) and the Incident Response Team (IRT) roles and responsibilities are provided in respective crisis management and incident response plans.

Table A7-9 outlines the key roles and responsibilities of Jadestone personnel required to be positioned in the State Maritime Environmental Emergency Coordination Centre (MEECC)/ DoT IMT in the event of a Level 2/3 spill. Table A7-10 outlines the roles and responsibilities of DoT personnel to be positioned within Jadestone’s IMT. Duty Cards for all roles are provided in the IMTRP Appendix B – IMT Duty Cards.

Table A7-5: IMT Leader Key Roles and Responsibilities

DUTY CARD 1: IMT LEADER
ROLE
<p>The IMT Leader has overall responsibility for the management the incident response.</p> <p>The IMT Leader will be the initial point of contact for the Corporate Office.</p>
RESPONSIBILITIES
<ul style="list-style-type: none"> • Take charge and exercise leadership, including the establishment of the incident management structure • Set objectives for the incident response, considering the safety of all personnel as a priority • Develop and approve plans and strategies to control the incident • Implement the IAP and monitor its progress • Provide information and warnings to communities so that they can make informed decisions • Establish effective liaison and cooperation with all relevant agencies, affected communities and others external to the IMT • Obtain and maintain human and physical resources required for the resolution of the incident • Apply a risk management approach, and establish systems and procedure for the safety and welfare of all response personnel • Ensure effective communications with the GCT Leader, when activated • Ensure appropriate financial delegations are in place and these delegations are made known to the appropriate response personnel. • Ensure relief and recovery considerations are addressed • Ensure collaborations between all organisations supporting the response
SPECIFIC TASKS
Initial Actions
<ul style="list-style-type: none"> <input type="checkbox"/> Obtain briefing on incident from the OSC (or IRT contact) and review initial assessment <input type="checkbox"/> Activate the necessary members of the IMT <input type="checkbox"/> Proceed to IMT Room <ul style="list-style-type: none"> <input type="checkbox"/> Ensure IMT Room is fully set-up before incident management commences <input type="checkbox"/> Communicate with Country Manager, as link into Group Crisis Team (GCT) as appropriate <ul style="list-style-type: none"> <input type="checkbox"/> Support Country Manager in seeking GCT guidance/support

<p>DUTY CARD 1: IMT LEADER</p>
<ul style="list-style-type: none"> <input type="checkbox"/> Support Country Manager in scheduling ongoing contact <input type="checkbox"/> If an oil spill, confirm spill level
<p>Determine Incident Objectives & general direction for managing the incident</p>
<ul style="list-style-type: none"> <input type="checkbox"/> Establish the immediate priorities: <ul style="list-style-type: none"> <input type="checkbox"/> Define IMT aim and objectives <input type="checkbox"/> If necessary, confer with government agencies to agree on common incident objectives and priorities <input type="checkbox"/> Chair initial IMT briefing <ul style="list-style-type: none"> <input type="checkbox"/> Communicate priorities to the IMT <input type="checkbox"/> Confirm ongoing means of communications with OSC has been established to Operations function <input type="checkbox"/> Confirm which key stakeholders need to be notified, responsibility for notification and ongoing liaison including regulatory authorities <input type="checkbox"/> Confirm with Planning Lead that all appropriate log-keeping, issues and actions, and status boards are maintained. <input type="checkbox"/> If required, give direction to HR/Admin on HR expectations to: Employee communications, Victim / next of kin support, affected contractors
<p>Ongoing Actions</p>
<ul style="list-style-type: none"> <input type="checkbox"/> Refer to and follow the Incident Management Process as described at Section 5.0 <input type="checkbox"/> Use the STAKEHOLDER MANAGEMENT Form – Appendix E and in OneNote – to assist with tracking stakeholder contact. <input type="checkbox"/> Hold regular IMT updates <ul style="list-style-type: none"> o Time out, phones switched to time out mode o Every 30 minutes initially (as a guide) o Monitor effectiveness of response and review issues & actions and priorities. o With Planning Lead, establish short-term/long-term recovery goals, milestones and resource requirements o Brief Corporate Office as required <input type="checkbox"/> Delegate Responsibilities <ul style="list-style-type: none"> o Allow yourself to focus on key stakeholder liaison and setting strategic objectives for next operational period <input type="checkbox"/> Determine duration and structure of incident response operations <ul style="list-style-type: none"> o Decide duration of current operational period (start thinking of when to stand down or next day operations) o Identify additional personnel needs to maintain 24-hour support.

DUTY CARD 1: IMT LEADER
Notifications & media strategy
<ul style="list-style-type: none"> <input type="checkbox"/> Confirm that required notifications are made and updates provided <ul style="list-style-type: none"> ○ Ensure communications with governments/regulators are regular and proactive ○ Consider need for additional senior management liaison / high level briefing with regulators ○ Ensure that internal notifications are made <input type="checkbox"/> The Media Support Team decide on the position the asset/company adopts: <ul style="list-style-type: none"> ○ Ensure an initial pre-approved media holding statement is prepared ○ Agree on message content and timing of release to media, internal audiences, regulators, community leaders etc. ○ Be prepared to deal with rapid media interest and possible presence at scene
Stand Down
<ul style="list-style-type: none"> <input type="checkbox"/> Communicate end of IMT response to all relevant internal and external parties <input type="checkbox"/> Provide copies of all incident related documents and logs to the Log Keeper <input type="checkbox"/> Stand down those people not required in managing ongoing recovery process <input type="checkbox"/> Hold debrief of IMT, specialist advisors, support teams and receive feedback <input type="checkbox"/> Review any capability gaps and opportunities for improvement in the response <input type="checkbox"/> Review and approve the incident report <input type="checkbox"/> Commission post-incident investigation <input type="checkbox"/> Ensure accepted recommendations have been incorporated into the IMTRP

Table A7-6: Operations Lead Key Roles and Responsibilities

DUTY CARD 2: OPERATIONS
ROLE
<p>Reports to IMT Leader and is responsible for activating and supervising tactical response operations in the field.</p> <p>Implements the operational plans to achieve response objectives and protect people, the environment and property</p>
RESPONSIBILITIES
<ul style="list-style-type: none"> – Obtain a briefing from the IMT Leader or the position that you report to – Establish the Operations Section appropriate to the size and complexity of the incident – Appoint unit coordinators as required and delegate tasks – Manage the personnel within the Operations Section – Develop and maintain an effective register of all resources, required, en route, allocated to and released from the incident – Adjust the structure of the Operations Section throughout the incident – Provide a safe working environment for personnel within the Operations Section – Establish and maintain a log of activities and decisions for the Operations Section – Communicate Section performance to the IMT Leader or the position you report to – Prepare shift handover and brief incoming Operations Lead – Manage the continuity of Operations activities across shift changes – Consider sources of local knowledge and information relevant to the incident. – Identify new and emerging risks for the incident and address these in the IAP – Collect, collate and store incident records – Maintain a personal log of activities and decisions made <ul style="list-style-type: none"> • Conduct handover briefing
SPECIFIC TASKS
Initial Actions
<ul style="list-style-type: none"> <input type="checkbox"/> Identify and locate OSC - obtain all available information on the situation <input type="checkbox"/> Agree call schedule with the OSC <input type="checkbox"/> Use the INCIDENT STATUS Form – see Appendix E and in OneNote <input type="checkbox"/> Assess incident, including incident potential <input type="checkbox"/> Start a personal log

DUTY CARD 2: OPERATIONS

<p>Ongoing Actions</p> <ul style="list-style-type: none"> <input type="checkbox"/> Propose and agree immediate priorities with the IMT Leader <input type="checkbox"/> Update Planning Lead on situation for development of the Incident Action Plan <input type="checkbox"/> Work with Logistics to identify logistical support requirements <input type="checkbox"/> Identify issues and actions required for the next period - mark and track on display boards <input type="checkbox"/> Source and provide technical information and support required by the response teams. <input type="checkbox"/> Develop strategy (i.e., what we are attempting to achieve) <input type="checkbox"/> Identify tactics/breaking down tactics into manageable tasks (i.e., how we are going to implement strategy) <input type="checkbox"/> Confer with response contractors / consultants for equipment and techniques <input type="checkbox"/> Allocate tactical resources based on strategy requirements <input type="checkbox"/> Provide updates to the display boards to reflect current operations in the field <input type="checkbox"/> Resource additional technical support as required
<p>Stand Down</p> <ul style="list-style-type: none"> <input type="checkbox"/> Attend the IMT debrief <input type="checkbox"/> Provide copies of all incident related documents and logs to the Log Keeper <input type="checkbox"/> Monitor the demobilization of response teams

Table A7-7: Logistics Lead Key Roles and Responsibilities

DUTY CARD 4: LOGISTICS
ROLE
Reports to IMT Leader and manages all logistics and procurement requirements for the response
RESPONSIBILITIES
<ul style="list-style-type: none"> – Assist with setup and coordination of the incident control centre (ICC) – Obtain a briefing from the IMT Leader or the position that you report to – Establish the Logistics Section appropriate to the size and complexity of the incident – Appoint unit coordinators as required and delegate tasks – Manage the personnel within the Logistics Section – Provide mobilisation and demobilisation for equipment and services – Adjust the structure of the Logistics Section throughout the incident – Provide a safe working environment for personnel within the Logistics Section – Establish and maintain a log of activities and decisions for the Logistics Section – Communicate Section performance to the IMT Leader – Prepare shift handover and brief incoming Logistics Lead – Manage the continuity of Logistics activities across shift changes – Consider sources of local knowledge and information relevant to the incident. – Identify new and emerging risks for the incident and address these in the IAP <ul style="list-style-type: none"> • Collect, collate and store incident records – Maintain a personal log of activities and decisions made <ul style="list-style-type: none"> • Conduct handover briefing
SPECIFIC TASKS
<p>Initial Actions</p> <ul style="list-style-type: none"> <input type="checkbox"/> Mobilize any additional resources or specialist advisors <input type="checkbox"/> Determine and supply immediate incident resource and facility needs <input type="checkbox"/> Establish communications, exchange information and coordinate activities with Logistic Supply Base(s) <input type="checkbox"/> Use and maintain the Resources Summary sheet – Appendix E and in OneNote– to track resources <input type="checkbox"/> Start a personal log
<p>Ongoing Actions</p> <ul style="list-style-type: none"> <input type="checkbox"/> Establish contact & coordinate logistics-related activities with other agency logistics personnel <input type="checkbox"/> Review logistics requirements for proposed tactics for upcoming operational period <input type="checkbox"/> Advise other Functions on resource availability to support incident needs <input type="checkbox"/> Coordinate and process requests for additional resources <input type="checkbox"/> Work with the Operations Lead to track and display incident resources and facilities

DUTY CARD 4: LOGISTICS

- Confer with IMT Leader for acquisition or release of major / costly resources or services
- Provide responders in the field with adequate food, drink, medical assistance, communications, clothing, transportation (land, water and air), sanitary and sleeping arrangements, security and other requirements
- Ensure that responders are supplied with the proper PPE
- Provide management and security support for incident facilities such as:
 - personnel and equipment staging areas
 - warehouse and maintenance facilities; camps; heli-bases etc.
- As appropriate to the incident, work with the Operations & Planning Functions, contractors & government agency personnel to plan, permit and operate waste handling and disposal and injured wildlife rehabilitation facilities
- Identify long-term service and support requirements for planned and expected operations
- Recommend the reassignment or deactivation of incident resources

Stand Down

- Arrange for transportation of equipment and personnel in conjunction with demobilization
- Attend the IMT debrief
- Provide copies of all incident related documents and logs to the Log Keeper

Table A7-8: Planning Lead Key Roles and Responsibilities

DUTY CARD 3: PLANNING
ROLE
Reports to the IMT Leader and manages the IMT related planning functions for the response
RESPONSIBILITIES
<ul style="list-style-type: none"> – Assist with setup and coordination of the incident control centre (ICC) – Obtain a briefing from the IMT Leader or the position that you report to – Establish the Planning Section appropriate to the size and complexity of the incident – Appoint unit coordinators as required and delegate tasks – Manage the personnel within the Planning Section – Adjust the structure of the Planning Section throughout the incident – Provide a safe working environment for personnel within the Planning Section – Establish and maintain a log of activities and decisions for the Planning Section – Communicate Section performance to the IMT Leader – Prepare shift handover and brief incoming Planning Lead – Manage the continuity of Planning activities across shift changes Checklist – Consider sources of local knowledge and information relevant to the incident. – Identify new and emerging risks for the incident and address these in the IAP – Monitor effectiveness of risk mitigation strategies – Provide strategic advice to the IMT based on information received – Complete the Net Environmental Benefit Analysis (NEBA) – Prepare the IAP for the next operational period and any longer-term planning required – Disseminate the IAP throughout the incident management structure – Develop changeover and demobilisation plans and manage their implementation – Develop and review the Communications Plan and its implementation – Regularly communicate progress of strategies and the IAP to the IMT Leader – Collect, collate and store incident records – Maintain a personal log of activities and decisions made <ul style="list-style-type: none"> • Conduct handover briefing
SPECIFIC TASKS
<p>Initial Actions</p> <ul style="list-style-type: none"> <input type="checkbox"/> Assist the IMT Leader to maintain and use the BRAINSTORMING/PLANNING Form – Appendix E and in OneNote <input type="checkbox"/> Mobilize any additional resources or specialist advisors immediately required to commence recovery planning <input type="checkbox"/> Ensure Log Keeper is in place and the IMT is maintaining an auditable documentation trail <input type="checkbox"/> Consider need to activate Environmental Support

DUTY CARD 3: PLANNING
<ul style="list-style-type: none"> <input type="checkbox"/> Setup and maintain a document retention process for all response documentation <input type="checkbox"/> Start a personal log
<p>Ongoing Actions</p> <ul style="list-style-type: none"> <input type="checkbox"/> Drive and monitor the incident management process – See Section 5.0 <input type="checkbox"/> Oversee and coordinate the actions of the Environmental Support Team. <input type="checkbox"/> Prepare the Incident Action Plan (IAP) –: <ul style="list-style-type: none"> <input type="checkbox"/> Establish time for next operational period (generally starting the next morning for 24-hour duration) <input type="checkbox"/> Create Incident Objectives for next operational period and submit to IMT Leader for approval <input type="checkbox"/> Create Meeting Schedule and advise IMT Leader on planning process issues <input type="checkbox"/> Develop plans for recovery operations to implement tomorrow, the next day, next week etc. <input type="checkbox"/> Consolidate the IAP and assemble for final approval and signoff
<p>Stand Down</p> <ul style="list-style-type: none"> <input type="checkbox"/> Ensure team members and supports complete any outstanding log/record keeping <input type="checkbox"/> Ensure all log sheets are collected before the team leaves the room. (All notebooks to be copied and / or originals to be retained) <input type="checkbox"/> Arrange for copies of all email traffic and incident files to be collated and stored. <input type="checkbox"/> Consider need to photograph IMT room and key display boards before it is tidied <input type="checkbox"/> Contribute to the development of the incident report.

Table A7-9: Roles and Responsibilities of Jadestone Personnel Positioned in State Maritime Environmental Emergency Coordination Centre (MEECC)/ DOT IMT

Key Roles	Responsibilities
CMT Liaison Officer	<p>Provide a direct liaison between the Jadestone and the State MEECC</p> <p>Facilitate effective communications and coordination between the Jadestone CMT Leader and the State Maritime Pollution Coordinator (SMPC)</p> <p>Offer advice to SMPC on matters pertaining to Jadestone crisis management policies and procedures</p>
Deputy Incident Controller	<p>Provide a direct liaison between the DoT IMT and the Jadestone IMT</p> <p>Facilitate effective communications and coordination between the Jadestone IMT (W) Leader and the DoT Incident Controller</p> <p>Offer advice to the DoT Incident Controller on matters pertaining to the Jadestone incident response policies and procedures</p> <p>Offer advice to the Safety Coordinator on matters pertaining to Jadestone safety policies and procedures particularly as they relate to Jadestone employees or contractors operating under the control of the DoT IMT</p>
Deputy Intelligence Officer	<p>As part of the Intelligence Team, assist the Intelligence Officer in the performance of their duties in relation to situation and awareness</p> <p>Facilitate the provision of relevant modelling and predications from the Jadestone IMT</p> <p>Assist in the interpretation of modelling and predictions originating from the Jadestone IMT</p> <p>Facilitate the provision of relevant situation and awareness information originating from the DoT IMT to the Jadestone IMT</p> <p>Facilitate the provision of relevant mapping from the Jadestone IMT</p> <p>Assist in the interpretation of mapping originating from the Jadestone IMT</p> <p>Facilitate the provision of relevant mapping originating from the Jadestone IMT</p>
Deputy Planning Officer	<p>As part of the Planning Team, assist the Planning Officer in the performance of their duties in relation to the interpretation of existing response plans and the development of incident action plans and related sub plans</p> <p>Facilitate the provision of relevant IAP and sub plans from the Jadestone IMT</p> <p>Assist in the interpretation of the Jadestone OPEP from Jadestone</p> <p>Assist in the interpretation of the Jadestone IAP and sub plans from the Jadestone IMT</p> <p>Facilitate the provision of relevant IAP and sub plans originating from the DoT IMT to the Jadestone IMT</p> <p>Assist in the interpretation of Jadestone’s existing resource plans</p> <p>Facilitate the provision of relevant components of the resource sub plan originating from the DoT IMT to the Jadestone IMT</p> <p>(Note this individual must have intimate knowledge of the relevant Jadestone OPEP and planning processes)</p>

Key Roles	Responsibilities
Environment Support Officer	<p>As part of the Intelligence Team, assist the Environmental Coordinator in the performance of their duties in relation to the provision of environmental support into the planning process</p> <p>Assist in the interpretation of the Jadestone OPEP and relevant TRP plans</p> <p>Facilitate in requesting, obtaining and interpreting environmental monitoring data originating from the Jadestone IMT</p> <p>Facilitate the provision of relevant environmental information and advice originating from the DoT IMT to the Jadestone IMT</p>
Deputy Public Information Officer	<p>As part of the Public Information Team, provide a direct liaison between the Jadestone Media team and DoT IMT Media team</p> <p>Facilitate effective communications and coordination between Jadestone and DoT media teams</p> <p>Assist in the release of joint media statements and conduct of joint media briefings</p> <p>Assist in the release of joint information and warnings through the DoT Information & Warnings team</p> <p>Offer advice to the DoT Media Coordinator on matters pertaining to Jadestone media policies and procedures</p> <p>Facilitate effective communications and coordination between Jadestone and DoT Community Liaison teams</p> <p>Assist in the conduct of joint community briefings and events</p> <p>Offer advice to the DoT Community Liaison Coordinator on matters pertaining to Jadestone community liaison policies and procedures</p> <p>Facilitate the effective transfer of relevant information obtained from through the Contact Centre to the Jadestone IMT</p>
Deputy Logistics Officer	<p>As part of the Logistics Team, assist the Logistics Officer in the performance of their duties in relation to the provision of supplies to sustain the response effort</p> <p>Facilitate the acquisition of appropriate supplies through Jadestone’s existing OSRL, AMOSC and private contract arrangements</p> <p>Collects Request Forms from DoT to action via the Jadestone IMT</p> <p>(Note this individual must have intimate knowledge of the relevant Jadestone logistics processes and contracts)</p>
Deputy Operations Officer	<p>As part of the Operations Team, assist the Operations Officer in the performance of their duties in relation to the implementation and management of operational activities undertaken to resolve an incident</p> <p>Facilitate effective communications and coordination between the Jadestone Operations Section and the DoT Operations Section</p> <p>Offer advice to the DoT Operations Officer on matters pertaining to Jadestone incident response procedures and requirements</p> <p>Identify efficiencies and assist to resolve potential conflicts around resource allocation and simultaneous operations of Jadestone and DoT response efforts</p>

Key Roles	Responsibilities
Deputy Waste Management Coordinator	<p>As part of the Operations Team, assist the Waste Management Coordinator in the performance of their duties in relation to the provision of the management and disposal of waste collected in State waters</p> <p>Facilitate the disposal of waste through Jadestone’s existing private contract arrangements related to waste management and in line with legislative and regulatory requirements</p> <p>Collects Waste Collection Request Forms from DoT to action via the Jadestone IMT</p>
Deputy Finance Officer	<p>As part of the Finance Team, assist the Finance Officer in the performance of their duties in relation to the setting up and payment of accounts for those services acquired through Jadestone’s existing OSRL, AMOSC and private contract arrangements</p> <p>Facilitate the communication of financial monitoring information to the Jadestone to allow them to track the overall cost of the response</p> <p>Assist the Finance Officer in the tracking of financial commitments through the response, including the supply contracts commissioned directly by DoT and to be charged back to Jadestone</p>
Deputy Division Commander	<p>As part of the Field Operations Team, assist the Division Commander in the performance of their duties in relation to the oversight and coordination of field operational activities undertaken in line with the IMT Operations Section’s direction. Provide a direct liaison between Jadestone’s Forward Operations Base/s (FOB/s) and the DoT FOB</p> <p>Facilitate effective communications and coordination between Jadestone Division Commander and the DoT Division Commander</p> <p>Offer advice to the DoT Division Commander on matters pertaining to Jadestone incident response policies and procedures</p> <p>Assist the Safety Coordinator deployed in the FOB in the performance of their duties, particularly as they relate to Jadestone employees or contractors</p> <p>Offer advice to the Safety Coordinator deployed in the FOB on matters pertaining to Jadestone safety policies and procedures</p>

Table A7-10: Roles and Responsibilities of DoT Personnel to be Positioned in Jadestone’s IMT/CMT

Key Roles	Responsibilities
DoT Liaison Officer	<p>Facilitate effective communications between DoT’s SMPC and Incident Controller and Jadestone’s appointed CMT Leader and Incident Controller</p> <p>Provide enhanced situational awareness to DoT of the incident and the potential impact on State waters</p> <p>Assist in the provision of support from DoT to Jadestone</p> <p>Facilitate the provision technical advice from DoT to Jadestone’s Incident Controller as required</p>
Media Liaison Officer	<p>Provide a direct liaison between Jadestone’s Media team and DoT IMT Media team</p> <p>Facilitate effective communications and coordination between Jadestone and DoT media teams</p> <p>Assist in the release of joint media statements and conduct of joint media briefings</p> <p>Assist in the release of joint information and warnings through the DoT Information and Warnings team</p> <p>Offer advice to the Jadestone Media Coordinator on matters pertaining to DoT and wider Government media policies and procedures</p>

10. Incident Assessment & Orientation

The IMT Leader is to lead and manage the IMT in responding to all incidents, with their priority being to provide support and/or assistance to the facility or associated Jadestone activity.

10.1 Understand & Assess the Situation

The IMT Leader is to coordinate personnel in understanding and assessing the situation with consideration given to the following:

- Size, scope, effect, or potential effect of the incident on:
 - People, Environment, Assets, Reputation, Livelihood (PEARL)
 - Consultation with the GCT with respect to Recovery/Business Continuity;
- Capture information relating to:
 - Incident history and responses already taken
 - Current response actions
 - Confirmation of spill level
 - Other response organisations that are activated

10.2 Initial Briefing

The IMT Leader is to conduct an initial briefing to bring key IMT members together to share initial assessment information and to outline the process for initial response activities.

The initial brief is designed to provide all personnel with information about the incident, reason for IMT activation and initial intentions. The objectives of the initial briefing will be to confirm:

- Outline of incident;
- need to confirm spill level;
- Actions taken at the tactical level prior to activation;
- Overarching intention with respect to IMT actions; and
- Provision of initial actions to be taken by the IMT.

If required, the initial briefing may be conducted by teleconference ahead of the IMT arriving at the ICC.

10.3 Notifications

Depending on the type and nature of the incident various internal and external notifications will be required. It is therefore vitally important to ensure that accurate and timely information is captured and that situational awareness is achieved quickly. The IMT Leader must ensure that notifications (where required) are completed and managed as part of an ongoing incident.

IMT Leader should notify the Country Manager of the event within one hour of receiving initial call. As situational awareness is gained, the incident/spill level is reassessed by the IMT Leader. Specific guidance relating to the regulatory notifications required during an oil spill incident are provided at:

- Appendix A of the IMTRP (Oil Spill Response Arrangements); and
- Oil Pollution Emergency Plans (OPEP) (this document).

Jadestone store and maintain an Incident Management Contact List on the Jadestone intranet page which contains the contact numbers for external organisations and facilities required to be contacted in the event of an emergency. This includes the organisations to be contacted in Appendix A6: Regulatory Notifications.

11. Oil Spill Response Cycle

It is the function of the On-Scene Commander (OIM or Vessel Master for Level 1 incidents) or the IMT Leader (Levels 2) to assess the incident and respond as per the procedures outlined in the Jadestone IMTRP (JS-70-PLN-F-00008). The following sections describe the methods to assess oil spill response priorities.

11.1 Gaining Situational Awareness

The IMT needs to review the applicability of the response strategies contained within OPEPs to the actual incident characteristics. This is achieved using operational monitoring to gain situational awareness and obtain answers to the following:

- What type of hydrocarbon has been spilt?
- What is the expected behaviour of the hydrocarbon that has been spilt?
- How much has been spilt?
- Is the source under control?
- Where is the hydrocarbon going?
- Is there anything in the path of the predicted hydrocarbon travel zones?
- Can the hydrocarbon be approached or are there safety concerns?
- Can the hydrocarbon be contained?
- Can the hydrocarbon be dispersed?
- Will shoreline impact occur and clean-up be required?
- Will wildlife be affected and require response?

11.2 Assess Appropriate Strategies

Identify and assess known response strategy activities against the criteria detailed below using NEBA:

- Applicability of the response strategy to the range of credible spills (as detailed in the OPEP), including the potential effectiveness of the response in managing the environmental risks associated with each spill.
- Acceptability of the response strategy in relation to the potential environmental impact caused by the implementation of the response.

11.3 OPEP Actions Tables

The Action Tables detailed in the facility specific OPEPs have been developed to assist the IMT in commencing an oil spill response. They have been developed utilising risk assessments to identify credible worst case spill scenarios, expected/ calculated release rates, known information of hydrocarbon types and behaviour, and expected partitioning of the hydrocarbon within the marine environment with an estimate of the volume of persistent oil.

Models give a theoretical zone of spread that is used to identify potential sensitive receptors and response strategies required to reduce the consequences of a spill to ALARP. The response strategies described in the facility specific OPEPs are assessed using a NEBA process so the most effective response strategies with the lowest environmental consequences can be identified, documented and prepared for.

Jadestone uses a planning process based on risk-based scenario planning which required the team to:

- Understand the hazard profile;

- Identify parameters to assess applicable response strategies and scale of the event & suitable response strategies;
- Understand the impacts associated with response strategies; and
- Ensure capability supports management of risks to ALARP.

The outcome of this approach is that oil spill hazards associated with Jadestone's activities are addressed and risks are managed to ALARP; and that response strategies and resources are based on the nature and scale of the incident.

Spill response planning to identify a suitable combination of response strategies involves estimating required resources based on potential effectiveness. Capability to support the minimum resources required has been planned for and is presented in each facility specific OPEP.

11.4 Incident Action Plan

The Incident Action Plan (IAP) formally documents and communicates the:

- Incident objectives;
- Effectiveness of the response strategies;
- Status of assets;
- Operational period objectives; and
- The response strategies approved by the IMT Leader during response planning.

It is the responsibility of the IMT to evaluate the response strategies provided in the OPEP based on real time information. The actual response may not always adopt all response options; this is outcome based depending on the circumstances that will produce impacts that are ALARP. The process implemented throughout the response by the IMT to assess the appropriate response strategies and implement these in a controlled manner to ensure the health and safety of operational personnel and effectiveness in response is the Incident Action Planning (IAP) process.

Jadestone IMT use the incident management planning process described in Section 5 of the IMTRP to develop IAPs.

The IAP is developed and implemented by the IMT for each defined operational period following the initial first-strike IAP, notifications, and activations defined in OPEPs. An operational period is the period scheduled for execution of actions specified in the IAP. The IAP is refreshed when conditions change and can have multiple objectives, strategies and tactics.

11.5 Monitoring Performance of IAP

As IAPs are implemented their performance is monitored through IMT communication with in-field response personnel (e.g. surveillance personnel, vessel masters, air-attack supervisors, team leaders etc.) who report on the effectiveness of the response strategies. Communication to the IMT is both verbally and through logs/ reports/ photos sent throughout the response.

The performance objectives and standards for response strategies and tactics are documented in the IAP. Performance against the objectives and standards are assessed through field observations and response monitoring and recorded in the IAP in the next operational period. Through this method, the performance measurement results (gathered from scientific reports and verbal communication/ logs/ photos/ reports provided by response Team Leaders) are fed back into the IMT to provide the IMT with greater situational awareness to enable the effective formulation of following IAPs i.e. the response strategies that are effective in obtaining the IAP objectives are continued or increased, while ineffective strategies are scaled back or ceased.

11.6 Net Environmental Benefit Analysis (NEBA)

The IMT use NEBA to inform the development and refinement of IAPs, so the most effective response strategies with the least detrimental environmental impacts can be identified, documented and executed. The Planning Lead is responsible for reviewing the priority receptors identified within the EP and OPEP and application of the NEBA to identify which response options are preferred for the situation, oil type and behaviour, environmental conditions, direction of plume and priorities for protection. The EP describes the Strategic NEBA which has directed the selection of response strategies in this OPEP to the sensitivities of the priority receptors.

When a spill occurs, NEBA is applied to the current situation, or operationalised, using the Operational NEBA'S provided in the IMTRP Appendix D – Operational NEBA Form.

- All ecological and socioeconomic sensitivities identified within the spill trajectory area are inserted; and
- Potential effects of response strategies on each sensitivity are assessed and assigned a positive, negative or no change rating.

The Operational NEBA Form documents the decisions behind the recommendation to the IMT Leader on which resources at risk to prioritise, and the positives and negatives of response strategies to deploy.

To maintain flexibility, response information is used by the IMT to redefine and revalidate the operational NEBA on a daily basis and is fed into the IAP process. Sources of data for the NEBA include:

- Vessel & aerial surveillance;
- Ongoing operational oil and oil in water monitoring (visual);
- Trajectory modelling;
- Tracking Buoy location updates;
- Satellite imagery (if required);
- UAV imagery (if required);
- Fluorometer readings (Entrained oil monitoring);
- Weather and ocean conditions;
- Source Control reports;
- Megafauna Reports;
- Containment and recovery boom effectiveness (m³/day);
- Skimmer effectiveness (m³/day and water cut);
- Nearshore ocean currents and tides (direction & strength);
- Shoreline Assessment reports;
- Oiled wildlife response reports; and
- Scientific monitoring reports.

The NEBA matrix table prioritises environmental sensitivities and assesses the individual net effect that each response option may have on it. This process enables the trade-off effect to be achieved and provides the ability for an informed decision to be made. NEBA is an integral part of the decision-making process and will ultimately result in a trade-off between priorities and response strategies. The outcome of the response however will result in an overall net environment benefit.

12. Further IMT Management Guidance

Further guidance on Jadestone IMT and response strategies are detailed in the IMTRP and supporting documentation. This is a controlled document and restricted to Jadestone. Refer to Jadestone Energy management information system for further details.

13. IMT Training and Competency

Internal drills/exercises to demonstrate competency are undertaken as per the Incident Management Exercise and Testing Program (JS-70-PR-F-00001). Jadestone IMT will undertake training in their respective roles and responsibilities as provided by an Australian Registered Training Organisations (RTO) or internationally accredited training provider.

Competencies for IMT members will be maintained and managed by the ER Lead. Training requirements and core competencies for Jadestone key IMT response staff are outlined in Table A7-11.

Table A7-11: IMT Roles – Training and Competency Requirements

IMT Role	Training										
	IMO 3 - Oil Spill Response – Command & Control Priority Level (1)	IMO 2 - Oil Spill Response Management Priority Level (1)	Coordinate Incident Response (PMAOMIR418) Priority Level (1)	Manage Incident Response Information (PMAOMIR320) Priority Level (1)	Jadestone Incident Management Team Introduction (Online Module) Priority Level (2)	IMT Duty Roster Orientation Priority Level (2)	IMT Oil Spill Response Workshop (Annual) Priority Level (3)	*IMT MAE Drill (Quarterly) Priority Level (3)	** Oil Spill Response Functional Exercise (Annual) Priority Level (3)	***Targeted Oil Spill Refresher Workshop (as required) Priority Level (3)	Media Awareness
IMT Leader	M		M		M	M	M	M	M	R	R
Operations Lead		M		M	M	M	M	M	M		
Planning Lead		M		M	M	M	M	M	M	M	
Logistics Lead		M		M	M	M	M	M	M		

Priority Levels - (1) Pre-join; (2) 0-3 months; (3) 0-12 months

Key: M – mandatory R – recommended

* - to participate **or** be an observer in a minimum of one drill per year

** - to attend a minimum of one within 3 year IMO certification period

***- to attend a minimum of three per year pro rata from starting time

13.1 IMT Exercise and Testing Program

To maintain the organisation's ability to react to and manage major incidents, a three-year exercise cycle shall be implemented. Over the course of a 3-year period it is intended that all major incident events including key MAEs and oil spills will be exercised using a stand-alone IMT drill or as part of an annual functional exercise.

The exercise cycle shall be planned to include a quarterly MAE scenario, oil spill response workshop and exercises to test the IMT and will alternate between offshore facilities. A quarterly MAE scenario can be substituted for or combined with the Annual Oil Spill exercise. Exercises program shall align with facility exercise programs wherever practical. All completed IMT exercises shall be recorded in BASSNET.

The Incident Management Exercise & Testing Program (JS-70-PR-F-00001) provides information on drill and exercises (types and documentation)

14. Scientific Monitoring

Scientific monitoring activities are the principle tool for monitoring environmental impacts from hydrocarbon exposure and allows operators to determine when their termination goals have been met during a response. Jadestone has prepared the Framework for Scientific Monitoring JS-70-PR-I-00038 (the Framework) to guide scientific monitoring activities in an oil spill response.

14.1 Objectives

The objective of the Framework is to describe scientific monitoring studies to quantify impacts to the environment and their subsequent recovery.

14.2 Industry Guidelines

The NOPSEMA Information Paper N-04750-IP1349: Operational and Scientific Monitoring Programs (OSMPs) sets out general principles and practical advice to assist operators in their planning for, and application of, fit-for-purpose SMPs.

Features of these documents have provided the basis for which the Framework has been developed, with specific guidance utilised in the development of the monitoring program designs and application considerations.

14.3 Monitoring Background

Scientific monitoring activities have very different objectives to operational monitoring which significantly influence the monitoring methods likely to be used, the degree of scientific rigour required to meet the monitoring objectives, and the scope of studies.

Operational monitoring is monitoring undertaken in OPEPs to obtain information which will assist in the planning and execution of the oil spill response. Scientific monitoring is undertaken to provide indicative or quantitative data for short term and longer-term environmental effects assessment. Table A7-12 provides the characteristics of each of the monitoring types.

Table A7-12: Characterisation Summary of Spill Monitoring Types

Monitoring Classification	Character / Criteria
Operational	<ul style="list-style-type: none"> • Results required short term; • Lower requirement for statistical strength; • Lower requirement for the identification of control sites or to demonstrate baseline conditions; • Concentration on key habitats or species that are indicators of biological community health, are of particular value or have slow recovery times; and • Includes monitoring to help predict environmental effects or define the sensitivity of resources to guide spill response actions.
Scientific	<ul style="list-style-type: none"> • May be longer-term studies and monitoring may extend beyond the time and location of the clean-up response; • Need for high statistical strength (e.g. potentially large number of samples or sample sites); and Need for high quality ‘control’ areas.

14.4 Revision of Monitoring Programs

Following a hydrocarbon spill, subsequent impacts to sensitive receptors will be apparent (e.g. oiling of habitats/fauna visible; surveillance activities confirm contact over time at receptor locations). Therefore, the requirement for long-term monitoring will be based on the nature of the spill and monitoring data collected for the short-term phase on the impact and recovery of sensitivities impacted.

Scientific monitoring activities will be assessed for their applicability and organised by the Environmental Team Lead. Using surveillance and spill fate modelling information collected as part of the operational monitoring, the IMT will assess and decide on the final suite of scientific response monitoring programs. Table A7-13 describes the linkages between the OMPs and the SMPs.

Table A7-13: Matrix of SMPs Triggered by OMPs

Operational Monitoring Strategy	SMP1	SMP2	SMP3	SMP4	SMP5	SMP6	SMP7	SMP8
Satellite tracking buoy	X	X	X	X	X	X	X	X
Aerial surveillance	X	X	X	X	X	X	X	X
Vessel surveillance		X	X	X	X	X	X	X
OSTM	X	X	X	X	X	X	X	X
Fluorometry	X						X	X
Shoreline habitat assessment		X	X	X	X	X	X	
SMP1 – Water Quality SMP2 – Sediment Quality SMP3 – Intertidal Mudflats, Sandy Beaches and Rocky Shores SMP4 – Mangroves SMP5 – Benthic Habitats SMP6 – Marine Fauna SMP7 – Seafood Quality, Fisheries and Aquaculture SMP8 – Fish, Invertebrates (Crustaceans and Cephalopods)								

14.5 Scientific Response Monitoring Service Providers

During and post a spill requiring scientific response, monitoring activities require resources external to Jadestone which include specialist technical capabilities. Jacobs is Jadestone’s primary support agency for scientific response monitoring activities. Jacobs has an Operational and Scientific Monitoring Program – Implementation Plan which outlines how Jacobs will coordinate its response arrangements for Jadestone including procedures, logistics and coordination, resourcing and preliminary study specifications.

Jacobs can increase resourcing for SMPs through the hiring of personnel and equipment through sub-contracted companies, as may be required to provide for the varied disciplines and fields of expertise for each of the SMPs, and to accommodate the scaling up of monitoring that may be required as the spatial extent of a spill increases. This is considered normal practice for environmental monitoring providers given the limited ability of any single provider to provide all expertise and equipment across the multitude of marine and coastal scientific disciplines. In support of this requirement Jacob’s provide three monthly reporting of available personnel to support Jadestone.

Vessels to mobilise field teams to monitoring sites or for on-water sampling activities will be mobilised through Jadestone existing MSAs through multiple vessel providers. Given that sampling locations for the SMPs would in many instances be coincident to sites targeted for operational monitoring and spill response strategies, there exists opportunities for shared vessel usage during a spill.